



REVISION HISTORY				
ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	1	PRODUCTION	JIM M.	05-06-13

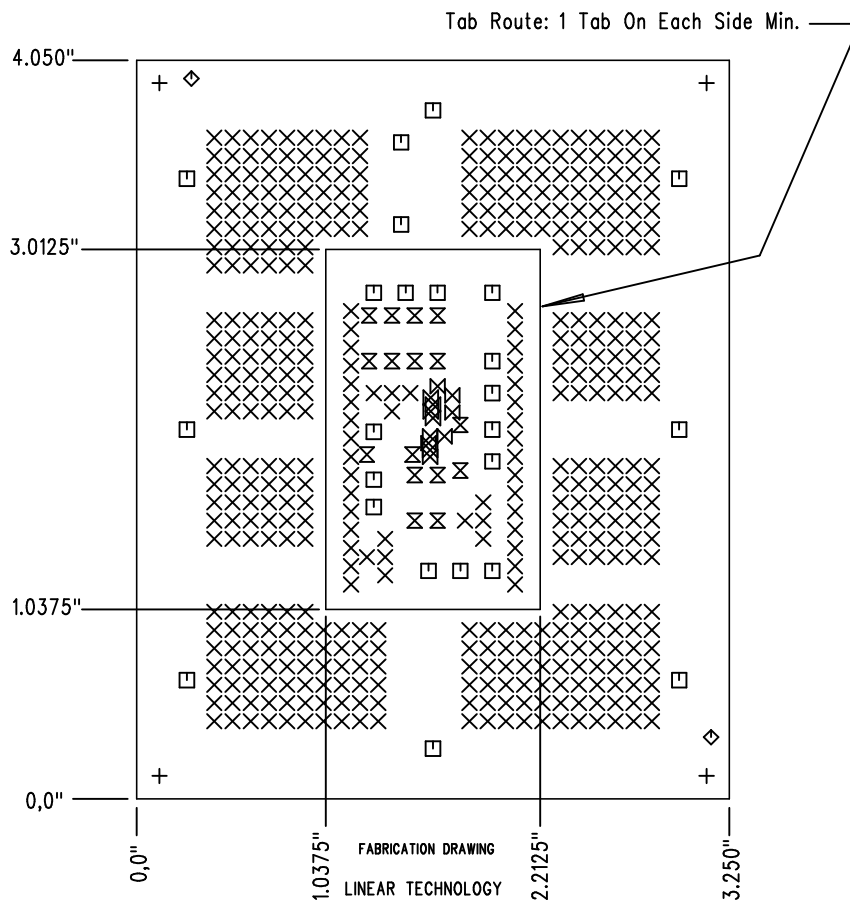


FABRICATION DRAWING
 LINEAR TECHNOLOGY
 DC1562B-1-LTC699X
 TimerBlox™
 DATE: 05-06-13



SIZE	QTY	SYM	PLATED	TOL
0.187	4	+	NO	+/-0.003
0.035	452	×	YES	+/-0.003
0.065	24	□	YES	+/-0.003
0.07	2	◇	NO	+/-0.003
0.057	16	⊗	YES	+/-0.003
0.015	12	⊠	YES	+/-0.003

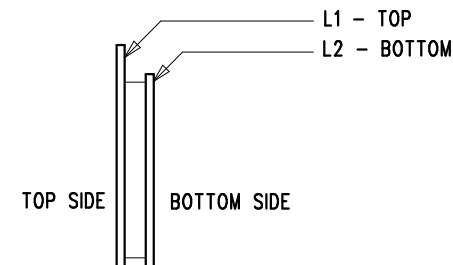

NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600.
- MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
 -FINISHED THICKNESS TO BE 0.062" +/- .005"
 -TOTAL OF 2 LAYERS WITH 2 OZ COPPER.
 -FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
 0.00" ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
 -ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
 -HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
 -GOLD IMMERSION BOTH SIDES.
 -FOR SILKSCREEN: USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
 PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.
- SCORING FOR PANELIZED PCB:



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: 0.XX" = ±0.01" 0.XXX" = ±0.005" INTERPRET DIM AND TOL PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION 	APPROVALS		 LINEAR TECHNOLOGY		1830 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
	PCB DES.	AK				
	APP ENG.	JIM M.				
			TITLE: FABRICATION DRAWING			
			TimerBlox™			
			SIZE	IC NO.	LTC699X	REV
			N/A		DEMO CIRCUIT 1562B	1
	SCALE = NONE		FILENAME: 1562B-1.PCB			SHT 1 OF 1