



REVISION HISTORY			
ECO	REV	DESCRIPTION	APP. ENG. DATE
-	2	PRODUCTION	MIKE S. 2-7-18

LAYER STRUCTURE

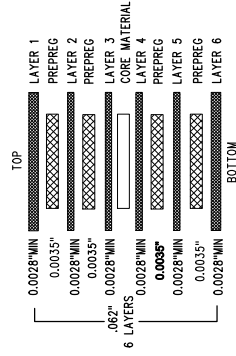

NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER PC-A-600.
2. MATERIAL:—LEAD FREE ASSEMBLY COMPLIANT,
—H-TEMP FRA (180°C TO)
3. FINISHED THICKNESS TO BE 0.062" \pm /.005"
—TOTAL OF 6 LAYERS WITH 2 OZ. CU ON THE OUTER
AND THE INNER LAYERS.
—FLAMMABILITY RATING: 94 V-0 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
4. DRILLING:—DRILL HOLES PER SCHEDULE PLATE THROUGH
HOLES WITH COPPER, 0.001" THICK MIN.
—ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
—HOLE LOCATION TOLERANCES ARE \pm /.0003"
IN RELATION TO CENTER
5. FINISH:—SMOBC USING LPI BOTH SIDES; COLOR GREEN.
—C000 IMMERSION BOTH SIDES.
—FOR SICKNESS: USE WHITE NON-CONDUCTIVE INK.
—DO NOT ALTER WORKS: e.g. TO ADD LOGO OR DATE CODE.
7. DESIGN HAS SOLDER MASK DEFINED PADS ON UI.
UI SOLDER MASK SIZE IS 25 MIL AND PAD SIZE IS 29 MIL.
DON'T CHANGE PAD SIZE OR SOLDER MASK SIZE.
8. PCBs ARE TO BE RoHS COMPLIANT.
9. SCORING FOR PANELIZED PCB:



SIZE	QTY	SYM	PLATED	TOL
0.185	4	+	N0	+/-0.003
0.095	13	□	YES	+/-0.003
0.01	416	◇	YES	+/-0.003
0.205	4	⌵	YES	+/-0.003
0.04	4	† ^A	YES	+/-0.003
0.035	3	† ^B	YES	+/-0.003

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES:
0.XX" = ± 0.01 "
0.XXX" = ± 0.005 "
INTERPRET DIM AND TOL
PER ASME Y14.5M-1994
THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: 0.XX" = ±0.00" 0.XXX" = ±0.005" 0.00XX" = ±0.0005" INTERFACES 14.5M-1994 THIRD ANGLE PROJECTION	APPROVALS				NO. 20-0001 REV. 01 DATE 01-15-99 (P) 408-253-7900 (F) 408-253-7900 FAX 408-253-7900 WWW.LINEARTECH.COM E-MAIL: SALES@LINEARTECH.COM LINEAR TECHNOLOGY 10000 NE 28TH AVE. FOLSOM, CA 95630	
	PCB DES.	HZ	APP ENG.	MKE S.	TITLE: FABRICATION DRAWING HIGH EFFICIENCY 5A SUBCOMPONENT REGULATOR	
					SIZE 1C NO. LT071B15SEV N/A DEMO CIRCUIT 2615A	REV 2 SHEET 1 OF 1
					FILENAME: 020615A-2.CPB	
					SCALE = NONE	
						