



SIZE	QTY	SYM	PLATED	TOL
0.00984	132	+	YES	+/-0.003
0.187	4	×	YES	+/-0.003
0.09488	10	□	YES	+/-0.003
0.20512	4	◇	YES	+/-0.003
0.035	6	⊗	YES	+/-0.003
0.03543	3	⊗	YES	+/-0.003



LAYER STRUCTURE

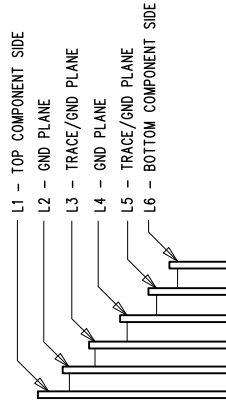

NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600.
2. MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 6 LAYERS WITH 2 OZ. CU .
FOR INNER AND OUTER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
4. DRILLING: -DRILL HOLES PER SCHEDULE, PLATE THROUGH
HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003"
IN RELATION TO CENTER
5. FINISH: -SMBWC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. PCBs ARE TO BE ROHS COMPLIANT.
- 8.] SCORING FOR PANELIZED PCB:



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: 0.0XX" = $\pm 0.01"$ 0.0XX" = $\pm 0.005"$ INTERPRET DIM AND TOL PER ASME Y14.5M-1984 THIRD ANGLE PROJECTION				ANALOG DEVICES		POWERED BY  LITTELFUSE 1530 MCCARTHY BLVD MILFORD, CT 06455 PHONE: (404) 931-9000 WWW.LITTELFUSE.COM	
	PCB DES.	HZ	YL	FOR EACH CUSTOMER USE ONLY			
	APP ENG.			TITLE: FABRICATION DRAWING			
				LOW QUIESCENT CURRENT HIGH FREQUENCY STEP-DOWN CONVERTER			
				SIZE N/A	IC NO. LTC7800EUDC	REV DEMO CIRCUIT 2786A	2
SCALE = NONE			FILENAME: DC2786A				SHEET 1 OF 1