




REVISION HISTORY				
ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	2	PRODUCTION	DB	09-28-15

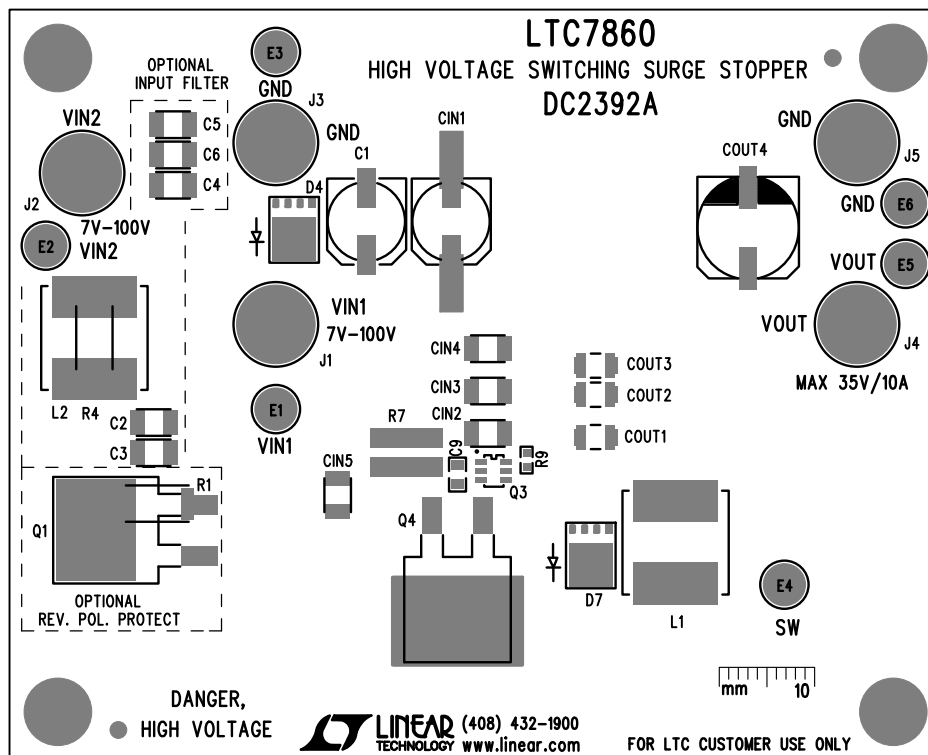

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
5. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.
6. INSTALL 4 STANDOFFS AT AS SHOWN BELOW:

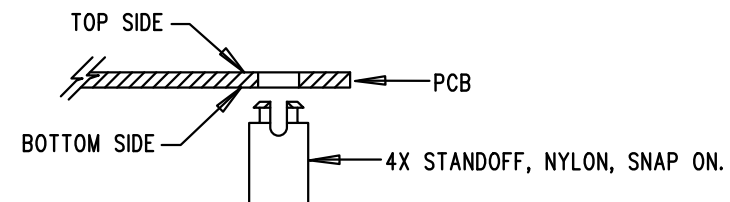

APPROVALS		 <div style="display: flex; justify-content: space-between; font-size: 0.8em;"> <div>1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com</div> <div>LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY</div> </div>		
PCB DES.	LT			
APP ENG.	DB			
		TITLE: TOP ASSEMBLY DRAWING		
		HIGH VOLTAGE SWITCHING SURGE STOPPER		
		SIZE	IC NO.	REV.
		N/A	LTC7860EMSE DEMO BOARD 2392A	2
SCALE = NONE		FILENAME: DC2392A-2.PCB		SHT 1 OF 2