


Maximum Solder Temperature is 240 deg C.

- NOTES: UNLESS OTHERWISE SPECIFIED
1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
- Install Shunts on JP1 = CCM  
JP2 = 500KHz  
JP3 = SOFT START  
JP4 = TRACK VOUT1  
JP5 = ON  
JP6 = ON

REVISIONS			
REV	DESCRIPTION	APPR	DATE

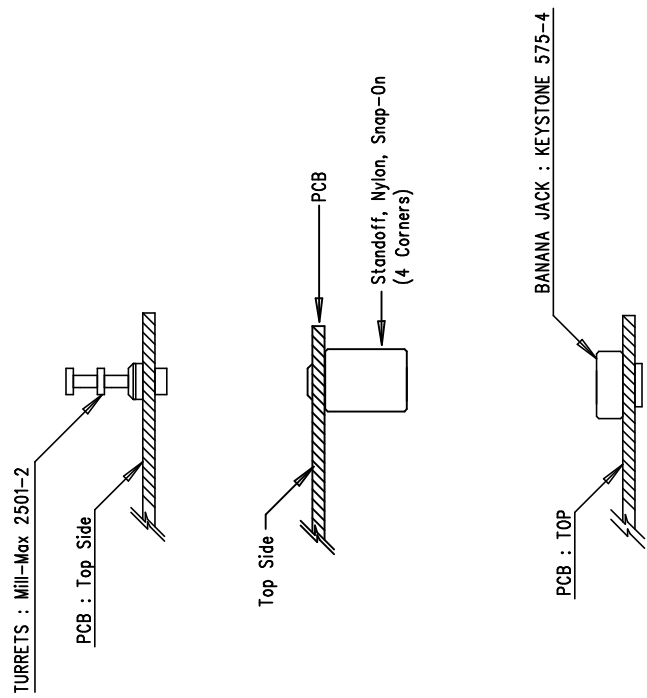

## Assembly Drawing Top

APPROVALS			
DRAWN	INIT	DATE	
	KL		
CHECK			
DESIGN			
ENGR			
SCALE = NONE			
			SHT 1 of 1

		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
LTM4619EV		4.5V-28V, Dual 4A Step-Down $\mu$ Module	
SIZE	A	DC1453A	REV. A