




REVISION HISTORY			
ECO	REV	DESCRIPTION	APP. ENG. DATE
1	1	REBUILD WITH CHANGE	WEI G. 1-18-11

LAYER STRUCTURE

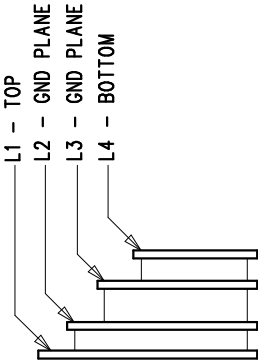

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. FAB PER IPC-A-600.
- 2. MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
 - FINISHED THICKNESS TO BE 0.062" +/- .005"
 - TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
 - FLAMMABILITY RATING: 94 V-0 MINIMUM.
- 3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
- 4. DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
 - ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
 - HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- 5. FINISH: -SNOBC USING LPI BOTH SIDES, COLOR GREEN.
 - GOLD IMMERSION BOTH SIDES.
 - FOR SILKSCREENS: USE WHITE NON-CONDUCTIVE INK.
- 6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE. PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- 7. PCBs ARE TO BE RoHS COMPLIANT.
- 8. SCORING FOR PANELIZED PCB (PRODUCTION FAB ONLY):

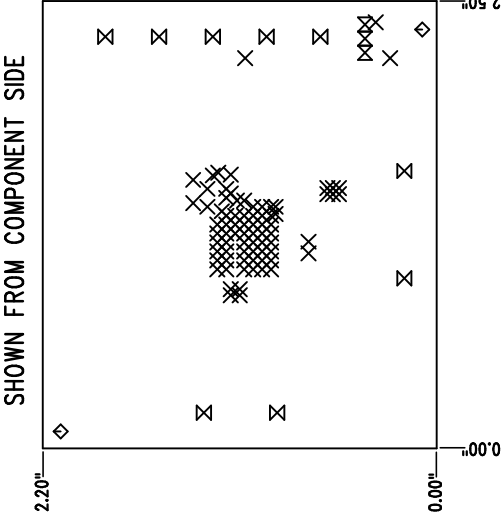

SIZE	QTY	SYM	PLATED	TOL
0.01	77	X	YES	+/-0.003
0.07	2	◇	NO	+/-0.003
0.095	9	⊗	YES	+/-0.003
0.035	3	⊗	YES	+/-0.003

UNLESS OTHERWISE SPECIFIED	
DIMENSIONS ARE IN INCHES	
TOLERANCES:	
0.XX" = ±0.01"	
0.XXX" = ±0.005"	
INTERPRET DIM AND TOL PER ASME Y14.5M-1994	
THIRD ANGLE PROJECTION	

APPROVALS	
PCB DES.	HZ
APP ENG.	WEI G.
SCALE = NONE	

		1830 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408) 521-9800 FAX: (408) 521-9801 LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY	
TITLE: FABRICATION DRAWING		ULTRALOW NOISE, EMC COMPLIANT	
36V, 2A DC/DC uMODULE		REV 1	
SIZE	IC NO.	LTM8032EV	REV
N/A	DEMO CIRCUIT	1386B	1
FILENAME: DC1386B-1		SHT 1 OF 1	