
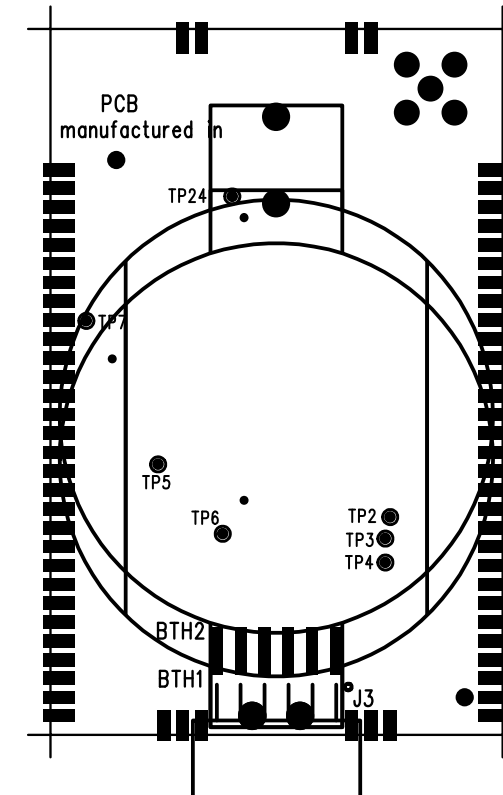


NOTES (UNLESS OTHERWISE SPECIFIED):

1. ASSEMBLE AND INSPECT IN ACCORDANCE WITH IPC STANDARD IPC-H-610D CLASS 2.
2. MAXIMUM PROTRUSION OF THE MOUSE BITES IS ± 0.010 ".
3. FINISHED ASSEMBLY TO BE FREE OF ALL SOLDER FLUX RESIDUES.
4. FINISHED ASSEMBLY TO BE SHIPPED IN APPROVED ANTI-STATIC PACKAGING.
5. ALL PROCEDURES REQUIRE ROHS-6. NO CLEAN SOLDER.
6. INSTALL RF SHIELD ON THE TOP SIDE BY INSERTING PINS INTO THE CORRECT MOUNTING HOLE POSITIONS.
 - a) SOLDER ALL FOUR CORNERS ON THE TOP SIDE.
 - b) CLEAN ALL FLUX RESIDUE FROM SOLDERED AREAS.
7. PLACE LABEL ON TOP OF THE SHIELD. FORMAT:
 - a) DUST PART NUMBER/REV.
 - b) U1 LOT NUMBER.
 - c) DATE OF MANUFACTURE (WW-YY).

R E V I S I O N S				
ECO	REV	DESCRIPTION	DATE	APPROVED
	1	INITIAL RELEASE	8-27-10	
1079	2	MINOR CLEAN UP	5-16-12	
1152	3	CHANGED STUB LENGTH	8-6-12	

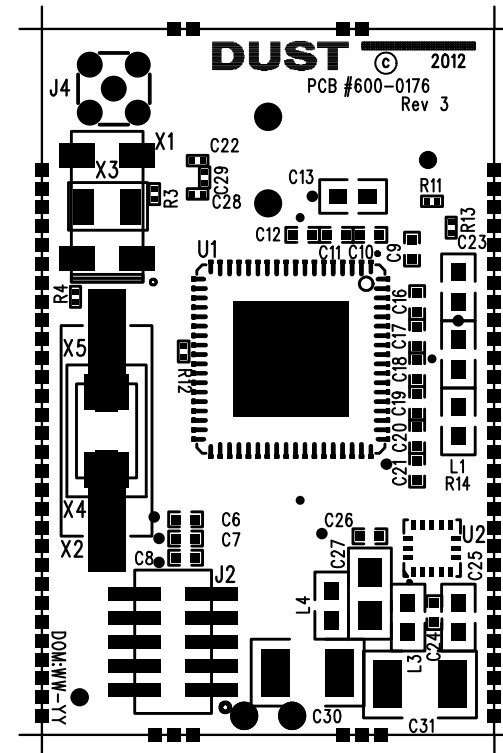

SEE SEPARATE BOM, 700-0176

		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES:	APPROVALS	DATE	DUST NETWORKS			
			TOLERANCES ARE: FRACTIONS: DECIMALS: .XX ± .01 ANGLES: 0° 30" .XXX ± .005	DRAWN BY: R.P.D.				
			CHECKED		TITLE: PCA ASSY, MODULE, CANADIAN			
			ENGRG					
NEXT ASSY	USED ON	MATERIAL -	ISSUED		B	FSCM NO.	DWG NO. 705-0176	REV. 3
APPLICATION		FINISH -	CONTRACT NO.			SCALE: NONE	SHEET 1 OF 1	
		DO NOT SCALE DRAWING						