

# Handheld dry-wells




Temperature sensor calibration is easy with a handheld dry-well.

## Fluke Calibration 9100S and 9102S Handheld Dry-Well Temperature Calibrators

- A temperature source that you can take anywhere
- Fast and easy calibrations of temperature sensors
- 9100S model weighs only 2 lbs, 3 oz (1 kilogram)
- Temperature ranges from  $-10\text{ }^{\circ}\text{C}$  to  $375\text{ }^{\circ}\text{C}$
- Stability during calibrations to  $\pm 0.05\text{ }^{\circ}\text{C}$
- Direct interface to the Fluke 754 Documenting Process Calibrator

Each unit includes RS-232 interface, instrument control software and a NIST-traceable calibration.

**Recommended accessories:** carrying case, additional inserts, reference temperature sensor and indicator, battery pack

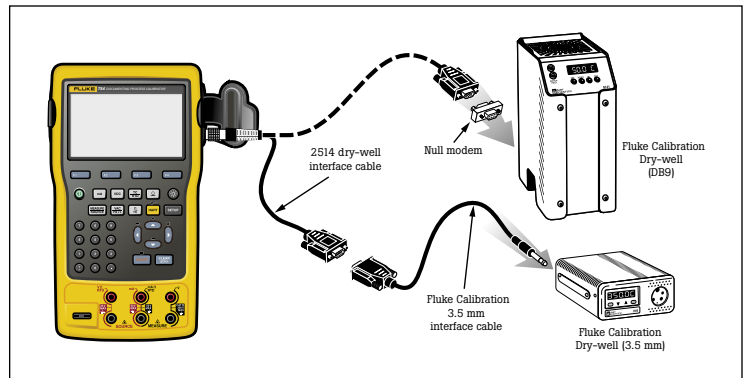


Easily connect a Fluke 754 to a dry-well for a fully automated temperature calibration that includes the temperature transmitter and temperature sensor.

## Ordering information

- 9100S** Handheld Dry-Well  
**9300** Rugged Carrying Case, 9100  
**9102S** Handheld Dry-Well, comes with your choice of two 3102 inserts  
**9308** Hard Carrying Case, 9102/9132  
**9320A** Battery Pack, 115V (9102S run time: 4 hrs)  
**3102-1** Insert, AL 1/16 in (1.6 mm)  
**3102-2** Insert, AL 1/8 in (3.2 mm)  
**3102-3** Insert, AL 3/16 in (4.8 mm)  
**3102-4** Insert, AL 1/4 in (6.4 mm) (Standard)  
**3102-6** Insert, AL 3/8 in (9.5 mm) (Standard)  
**3102-7** Insert, AL 7/16 in (11.1 mm) (Standard)  
**3102-8** Insert, AL 5/32 in (4 mm) (Standard)  
**2514** Dry-well interface cable to Fluke 754 Insert. Specify "A", "B", "D"

## 9100 fixed-block options

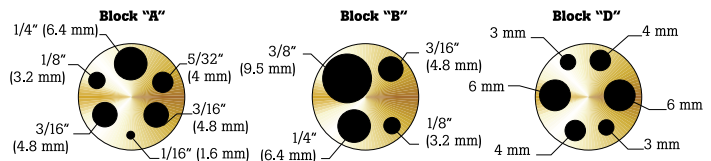

Contact:  
 Industrial Process Measurement, Inc.  
 3910 Park Avenue, Unit 7  
 Edison, NJ 08820  
 732-632-6400  
 support@instrumentation2000.com  
 http://www.instrumentation2000.com