

**FLUKE**®

Calibration

# Fluke Calibration products and services

Short form catalog

Precision, performance, confidence.™



# Table of contents

## 2 Electrical calibration



DC/LF electrical calibrators .....	5
Specialty calibrators .....	6
Oscilloscope calibrators .....	7
Precision multimeters .....	7
Electrical standards .....	8

### Featured products

#### 5730A Multifunction Calibrator

Page 3

#### 5322A Electrical Safety Tester Calibrator

Page 3

## 9 RF calibration



RF references .....	10
---------------------	----

### Featured products

#### 96270A 27 GHz Low Phase Noise Reference Source

Page 10

#### 96040A Low Phase Noise Reference Source

Page 10

## 11 Temperature calibration



Standard platinum resistance thermometers .....	18
ITS-90 fixed-point cells .....	18
Cell maintenance apparatus .....	19
Thermometer readouts .....	20
Reference PRTs .....	21
Thermocouples .....	21
Thermistors .....	21
Compact calibration baths .....	22
Standard calibration baths .....	22
Special application baths .....	23
Bath controllers .....	23
Metrology Wells .....	23
Field Metrology Wells .....	23
Dual-block dry-well .....	24
Field dry-well calibrators .....	24
Micro-Baths .....	24
Portable Calibration Baths .....	24
Handheld calibrators .....	24
Infrared calibrators .....	25
Zero-point dry-well .....	25
Surface probe calibrator .....	25
Thermocouple furnaces .....	25

### Featured products

#### 6109A/7109A Portable Calibration Baths

Page 12

#### 1586A Super-DAQ Precision Temperature Scanner

Page 12

**26 Humidity calibration**



Humidity calibrators ..... 27

**39 Gas flow calibration**



Gas Flow Standards..... 40

**28 Pressure calibration**



Gas pressure controllers/calibrators ..... 32  
 High pressure controllers/calibrators ..... 33  
 Reference pressure indicators..... 33  
 PG7000 series piston gauges..... 32  
 2400 series piston gauges..... 34  
 Specialty piston gauges ..... 35  
 Manual pressure generation and control..... 35  
 Industrial deadweight testers ..... 36  
 Pressure comparators ..... 36  
 Pressure calibrators ..... 37  
 Air data calibration..... 38  
 Pressure calibration systems ..... 38

**Featured products**

**8270A/8370A Modular Pressure Controllers/Calibrators**

Page 29

**6270A Modular Pressure Controller/Calibrator**

Page 29

**2271A Industrial Pressure Calibrator**

Page 29

**41 Calibration software**



Electrical and RF calibration software..... 43  
 Calibration asset management software ..... 43  
 Software support programs..... 43  
 Temperature calibration software..... 44  
 Pressure/Flow calibration software..... 45

**Featured products**

**MET/TEAM® Test Equipment Asset Management Software**

Page 42

**MET/CAL® Calibrator Management Software**

Page 42

**46 Data acquisition and general purpose test**



**Featured products**

**2638A Hydra Series III Data Acquisition System**

Page 47

**Fluke DAQ 6.0 Application Software**

Page 47

**Service programs..... 50**

**Training..... 51**



# Electrical calibration

Electrical calibration refers to the process of verifying the performance of, or adjusting, any instrument that measures, sources, or tests electrical parameters. This discipline is usually referred to as dc and low frequency ac electrical metrology. Principal parameters include voltage, current, resistance, inductance, capacitance, time and frequency. Other parameters, including electrical power and phase, are also in this segment of metrology. Ratiometric comparisons of similar parameters are often performed to compare a known parameter to an unknown similar parameter.

Electrical calibration involves the use of precise devices that evaluate the performance of key

properties for other devices called units under test (UUTs). Because these precise devices have thoroughly known performance characteristics compared to the UUT, performance evaluation and/or calibration adjustment of the UUT to identify or minimize errors is possible. Typically, the performance of such precision devices should be four or more times better than the UUT.

These precision devices fall into two broad categories. Electrical signal sources are often referred to as either calibrators or standards. Precision measurement devices are often classified as reference digital multimeters, measurement standards, or ratio bridges.

## Product highlights



### 5730A Multifunction Calibrator

#### The new gold standard in electrical calibration

The 5730A High Performance Multifunction Calibrator is the culmination of years of engineering development, customer research and industrial design, to bring to market the new gold standard in multifunction calibration. Like its predecessors, the 5700A and 5720A calibrators, the 5730A calibrates a wide range of digital multimeters, up to long-scale 8.5 digit DMMs, as well as a wide-range RF multimeters. This new model features improved specifications that will help you increase test uncertainty ratios (TURs) and improve test confidence.

- 6.5 inch VGA capacitive touchscreen with full color graphical user interface
- Menus and functions displayed in choice of nine languages
- Visual Connection Management™ terminals guide cable connections
- Extended operational reliability through the use of modern analog and digital components and state-of-the-art circuit board technologies
- Artifact Calibration—the process of using just three external standards—10 V, 1 ohm and 10 k ohm, to automatically adjust the entire instrument—optimizes performance to the best specified performance
- Cal Check—a process that tests all function and ranges for any drift since the most recent calibration—provides ongoing confidence in performance. Any output drift is measured and evaluated it with respect to specification.
- Compatible with 52120A and 5725A amplifiers
- Full MET/CAL® compatibility with 5700A and 5720A procedures (MET/CAL versions 7.3 and above)
- 30 MHz and 50 MHz wideband output options available



### 5322A Electrical Safety Tester Calibrator

#### Calibrate your entire electrical safety tester workload even more easily and efficiently!

The 5322A Electrical Safety Tester Calibrator helps calibration technicians comply with new regulatory standards up to four times faster than with traditional manual, multiple-product methods.

The 5322A facilitates compliance with exacting international standards such as the United Kingdom's BS7671 17th Edition, IEC/EN Standards, Australia and New Zealand's AS/NZS 3000 and Chinese verification/calibration regulations for various electrical testers.

The 5322A combines many functions into a single instrument, replacing discrete resistors, decade boxes and other custom solutions commonly used to calibrate electrical testers. This single-box solution speeds and simplifies calibration because users only need to learn, operate and maintain one calibrator rather than multiple instruments. And while it's difficult to automate multiple testers, the 5322A can be automated with MET/CAL™ Calibration Software—further increasing speed and throughput.

Workload includes insulation resistance testers; leakage current testers; multifunction installation testers; portable appliance testers (PATs); continuity testers and earth (ground) resistance testers; loop/line impedance testers and ground bond testers; residual-current device (RCD) or ground fault current interrupter (GFCI) testers; and hipot testers.

The 5322A is available in multiple models, offering the flexibility to select the features best suited to your lab's workload:

- The base 5322A model offers 1.5 kV high resistance sourcing.
- The 5322A/5 offers 5 kV high voltage resistor sourcing.

# Selection guide

	Multi-Product Calibrators			Multifunction Calibrators	Oscilloscope Calibrators	Electrical Tester Calibrator	Power and Energy Calibrators and Standards			Precision Process Calibrators	
Workload	5080A	5502A	5522A	5730A	9500B	5322A	6003A	6100B	6105A	525B	7526A
<b>Analog/panel meters</b>											
High burden meters											
Low burden meters						V dc & V ac				V dc, I dc & R	V dc, I dc & R
<b>DMMs</b>											
Basic dc V accuracy	100 ppm	50 ppm	11 ppm	3.5 ppm	n/a	0.10 %	375 ppm	112 ppm	42 ppm	40 ppm	40 ppm
3.5 digits (typ. ± 0.3 % dc V)						V dc & V ac				V dc, I dc & R	V dc & V ac
4.5 digits (typ. ± 0.025 % dc V)											
5.5 digits (typ. ± 0.015 % dc V)											
6.5 digits (typ. ± 0.0030 % dc V)											
7.5 digits (typ. ± 16 ppm dc V)											
8.5 digits (typ. ± 8 ppm dc V)											
<b>Temperature/pressure</b>											
RTD simulate											
RTD measure											
Thermocouple simulate											
Thermocouple measure											
Pressure modules			opt							opt	opt
Two-wire transmitters											
<b>Oscilloscopes</b>											
	1 to 5 channels										
200 MHz to 600 MHz	200 MHz opt	300 MHz or 600 MHz opt	600 MHz opt		600 MHz std						
1.1 GHz			1 GHz opt		9510 Head opt						
3.2 GHz					9530 Head opt						
6.4 GHz					9560 Head opt						
25 ps fast edge (14 GHz)					9550 Head opt						
<b>Safety testers</b>											
Hipot											
Megohm meters	MEG opt										
Installation											
PATs											
Continuity	MEG opt										
Loop impedance											
Leakage current											
Ground bond											
RCD/GFCI											
Medical safety											
<b>Power/energy</b>											
Wattmeters											
Harmonic analyzers							PQ opt				
Flicker meters			PQ opt				PQ opt				
Phase angle meters			PQ opt								
Power analyzers			PQ opt				PQ opt				
Power recorders											
Secondary energy standards											
Watt-hour/energy meters							E opt				
<b>Other</b>											
Clamp meters				52120A Amp + COIL Opt			52120A Amp + COIL Opt				
LCR meters		RC only	RC only								
Process calibrators											
Data acquisition											
Non sine waveforms											
RF millivolt meters				30 and 50 MHz WB opt							
# of calibrator functions	8	11	11	5	11+	9	9	8	8	9	9



5522A

## DC/LF Electrical calibrators

### 5730A Multifunction Calibrator

The new gold standard in electrical calibration.

- The next generation high-performance multifunction calibrator
- Support instruments of up to 8.5 digits in measurement performance
- Artifact Calibration permits the lowest cost of support and highest confidence in performance
- New internal printed circuit boards with upgraded digital technology
- 6.5 inch VGA capacitive touchscreen with full color graphical user interface
- Menus and functions displayed in choice of nine languages
- Optional wideband outputs to 30 or 50 MHz



5730A



5502A



5080A

### 5522A Multi-Product Calibrator

Robust, transportable wide workload coverage.

- Calibrates a wide variety of electrical test equipment with more than 14 functional capabilities
- Accuracies intended to support DMMs to 6.5 digits
- Robust protection circuits prevent costly damage from operator error
- Optional oscilloscope calibration to 1100 MHz
- Easy to transport

### 5502A Multi-Product Calibrator

Robust, transportable solution to match your workload and budget.

- Calibrates a wide variety of electrical test equipment
- Robust protection circuits prevent costly damage from operator error
- Ergonomically designed carrying handles
- Rugged optional case with built-in handles and wheels and removable front/rear access doors
- Optional oscilloscope calibration to 600 MHz

### 5080A High Compliance Multi-Product Calibrator

Solutions for your analog and digital workload.

- High compliance for difficult-to-calibrate analog instruments
- Robust protection circuits prevent costly damage from operator error
- Calibrates a wide workload, including analog meters and 3.5 and 4.5 digit DMMs
- Options for oscilloscope and megohm meter calibration



6105A/6100B



52120A



7526A



5725A



5322A



6003A



6135A/PMU

## Specialty calibrators

### 6105A/6100B Electrical Power Standards

The most accurate, comprehensive and flexible sources of electrical power quality and energy signals.

- Power calibration with voltage to 1008 V and current to 21 amps, and optionally up to 80 amps
- Voltage and current accuracies better than 0.005 % (50 ppm)
- Current to voltage phase accuracy of 0.003 °
- Programmable harmonic distortion up to 100 harmonics
- Includes other power quality testing phenomena
- Complex measurements generating a wide variety of signals

### 5725A Amplifier

The Fluke 5725A Amplifier is a companion to the 57XX Series calibrators.

- Extends the calibrators' alternating volt-hertz product to 1100 V at 30 kHz and 750 V at 100 kHz
- Increases maximum direct and alternating current to 11 A

### 52120A Transconductance Amplifier

Test and calibrate power standards, power and energy meters, PQ analyzers, high-current clamp meters and Rogowski coils.

Delivers:

- 120 A stand-alone
- 240 A or 360 A with parallel operation
- 3000 A or 6000 A with accessory coils
- Industry-leading amplifier accuracy:
  - 100 PPM dc to 850 Hz
  - 120 PPM dc and 260 PPM ac in stand-alone operation
- Frequency capability, dc to 10 kHz

### 7526A Precision Process Calibrator

Best balance of economy and accuracy for calibration of temperature and pressure process measurement instrumentation.

- Sources and measures dc voltage, current, resistance
- Measures and simulates RTDs and thermocouples
- Measures pressure using Fluke 750 Series pressure modules
- Includes 24 V dc loop power supply, automated switch-test function and measures 4 mA to 20 mA

### 6003A Three Phase Electrical Power Calibrator

Three power phases in a single easy-to-use instrument.

- Cost effective
- Easy to use
- Simulates dc or ac electrical power and energy in voltage range to 600 ac V or 280 dc V and current range to 30 A per phase or 90 A combined
- Phase shift between voltage and current channels can be set from 0° to 359.99°

### 6135A/PMU Phasor Measurement Unit Calibrator

Fast, automated, IEEE C37 118.1-2011-compliant PMU calibrations. System includes:

- PMU control unit
- GPS receiver
- PMU test and calibration software
- Fluke 6135 Electrical Power Standard
- Configured server PC

### 5322A Electrical Safety Tester Calibrator

Calibrate all major types of electrical safety testers with just one calibrator

- Calibrate insulation resistance testers; leakage current testers; multifunction installation testers; portable appliance testers (PATs); continuity testers, earth (ground) resistance testers and many more types of electrical safety testers
- Complies with new regulatory standards up to four times faster than traditional methods
- Compatible with MET/CAL software



### 525B Temperature/Pressure Calibrator

Superior accuracy and functionality in an economical benchtop package.

- A calibrator to address process industry instrumentation
- Simulates and measures all ANSI thermocouples, as well as L and U types, and provides cold junction compensation to enable calibration of a wide variety of thermocouple instrumentation
- Direct input for storage of ITS-90 RTD constants
- RTD source uncertainties to 0.03 °C



525B



55XX



9500B

## Oscilloscope calibrators

### 9500B Oscilloscope Calibrator

The highest performance, fully automated, upgradeable oscilloscope calibration workstation.

- Full automation provides totally hands-free calibration
- Bandwidths of 600 MHz, 1,000 MHz, 3,200 MHz, and 6,400 MHz
- A fast edge of 25 ps to address bandwidths up to 14 GHz
- Connect up to five channels simultaneously

### 55XX Series Oscilloscope Calibration Options

Options for the 5502A and 5522A calibrators add capabilities to calibrate your digital and analog oscilloscopes with any of three different ranges of bandwidths.

- Leveled sine wave generator with optional bandwidths of 300 MHz, 600 MHz and 1100 MHz for verifying oscilloscope bandwidth
- DC and square wave voltage generators for calibrating voltage gain
- Horizontal time base calibration functions
- Edge source including a 300 ps fast edge with low aberrations for verifying dynamic response
- Fast edge risetime pulse generator (< 1 ns) for checking pulse response

## Precision multimeters

### 8588A Reference Multimeter

The world's most stable digitizing reference multimeter

- 8.5 digit resolution, exceptional linearity and low noise and stability
- Guaranteed 3.5 ppm 1 year accuracy (99 %) analog performance without self-calibration
- AC rms measurement performance that is ten times faster, two times less noisy, and more sensitive for low level signals than other instruments in this class
- 0 to 10 s aperture setting allows industry's widest flexibility to control data capture window
- Intuitive menu structure and graphical display that enables instantaneous visualization of trend plot, statistical analysis, histogram and FFT
- GPIB, USBTMC, Ethernet allows industry standard selection of remote interface



8588A/8558A

### 8558A 8.5 Digit Multimeter

The industry's fastest direct 5 mega-samples-per-second digitizing for system automation in labs and manufacturing test environments.

- Digitizes at 5 MS/s, 18-bit resolution into memory for capturing complex, fast changing waveforms
- Up to 20 MHz bandwidth for voltage and 4 MHz for current retains high bandwidth content of the signal measured
- 4.5 digit data delivered to a PC at 100 kilo-readings/s



732C/734C

## Electrical standards

### 732C/734C DC Reference Standards

The simple way to maintain and disseminate 10 V, 1.0 V and 0.1 V

- A primary standard for traceability of dc voltage to better than 1 ppm
- Eliminates the need for external dividers
- Complete mechanical and electrical independence of each of its four 732C standards
- Battery powered for easy shipping

### 5790B AC Measurement Standard

Easiest way to make precision ac measurements

- AC voltage measurement uncertainties as low as  $\pm 24$  ppm
- Works with A40B shunts for making precise absolute and relative current measurements without requiring manual current value calculations
- 30 MHz and 50 MHz wideband range options
- Statistics and peak-to-peak waveform functions
- Intuitive graphical interface
- Visual Connection Management™ terminals that light up to show the active terminals

### 742A Resistance Standard

High accuracy working standard for on-site resistance calibration.

- Small and rugged standard resistors with six-month stabilities to 2.5 ppm
- Open air use so no oil or air baths required
- 18 °C to 28 °C operating range
- Standard values from 1 ohm to 100 Megohms



5790B



A40B



910/910R

### A40B Series Precision Current Shunts

Precision, low inductance shunts for dc and ac current metrology.

- Simplifies calibration/verification of precision calibrators and current sources
- Shunts sized for current from 1 mA to 100 A
- Usable from dc to 100 kHz
- Ultra low phase shift to support power quality instrument metrology

### 752A Reference Divider

Setting the standard for ratio accuracy and ease of use.

- Key standard for calibrating 57xx Series Calibrators
- 10:1 and 100:1 divider outputs
- Output uncertainty 0.2 ppm and 0.5 ppm
- Built-in calibration bridge

### 910/910R GPS Controlled Frequency Standard

Cesium controlled frequency standard that uses GPS technology and connectivity to provide primary standard traceability from any location.

- Unique traceability feature means no more re-calibrations
- Two high-stability models to meet your application and fit your budget
- Built-in rubidium atomic clock (910R)
- Up to 13 outputs, maximizing cost efficiency



742A



752A



908/909

### 908/909 Frequency References

Stable frequency references for test systems and calibration labs.

- Accurate reference atomic clock in automated test systems
- Affordable and very cost effective
- Designed for portability with optional carrying case



## RF calibration

RF and microwave calibration refers to the process of verifying the performance of, or adjusting/deriving corrections for, any instrument or component that will be used in the measurement or testing of RF and microwave parameters. This discipline is usually referred to as RF and microwave metrology. Principal parameters include RF voltage, RF power, impedance, modulation, distortion, time, frequency and phase. High dynamic range ratiometric comparisons are often performed and results are expressed in the logarithmic dB form.

As with any other calibration, RF and microwave calibration compares a device or unit under test (DUT or UUT) to a traceably calibrated standard or reference device. The process typically involves comparing a measuring UUT to a reference source; a sourcing UUT with a measuring reference; or quite commonly a measuring UUT with a measuring reference, using a stable but unknown source.

In each case, the uncertainty or stability of the reference should significantly exceed the specified performance of the device or unit under test. RF metrologists typically look for performance margins of 4:1, however, test uncertainty ratios lower than this usual target are more frequently encountered in RF than in other calibration disciplines. Conversion from logarithmic (dB) to linear units is recommended practice when combining uncertainty contributions and considering test uncertainty ratios.

Precision devices that are commonly used in RF and microwave calibration fall broadly into four categories:

**Sourcing instruments.** Reference signals and/or modulation sources, frequency references, pulse or arbitrary waveform generators, reference attenuators.

**Measuring instruments.** Power sensors, spectrum analyzers, measuring receivers, oscilloscopes, RF voltmeters, frequency counters.

**Source-measure instruments.** Vector or scalar network analyzers.

### Precision components

- Power splitters, power dividers or couplers, attenuating pads
- Inter-series, polarity or sacrificial cables and adapters
- Short, open, load or sliding terminators
- Reflection bridges or directional couplers



## RF references

### 96270A 27 GHz Low Phase Noise Reference Source

The simplest, most accurate and cost effective single instrument for calibrating spectrum analyzers, RF power sensors and more.

- Self-characterization lets you avoid calculating correction factors for each component in the signal delivery system
- What you set is what you get. Accurate signal delivery direct to the UUT input up to 27 GHz
- Covers a broad range of RF calibration workload
- Reduces the number of instruments and interconnections required for your RF calibration system
- Integrated 300 MHz frequency counter and dual power meter readout eliminate need for additional instruments
- Calibration-specific interface simplifies technician tasks
- Simplifies uncertainty calculations
- Lowers RF system maintenance costs
- With automation, reduces spectrum analyzer calibration times by as much as 50 % over manual methods
- Directly replaces and emulates legacy HP3335A, HP8662A, HP8663A, HP8340A, and HP8360B generators

### 96040A Low Phase Noise Reference Source

Simplify your RF calibration system by replacing many of the instruments and accessories that make up your current system.

- Covers a broad range of RF calibration workload
- Reduces the number of instruments and interconnections required for your RF calibration system
- What you set is what you get. Accurate signal delivery direct to the UUT input
- Integrated 50 MHz frequency counter eliminates need for an additional instrument
- Calibration-specific interface simplifies technician tasks
- Simplifies uncertainty calculations by delivering known signals direct to the unit under test (UUT)
- Lowers RF system maintenance costs
- With automation, reduces spectrum analyzer calibration times by as much as 50 % over manual methods
- Directly replaces and emulates legacy HP3335A, HP8662A, and HP8663A generators



## Temperature calibration

Temperature calibration refers to the calibration of any device used in a system that measures temperature. Most importantly, this usually means the temperature sensor, itself, which is typically a platinum resistance thermometer (PRT or PT-100), thermistor, or thermocouple. Readings from these thermometers are made by thermometer readout devices which measure their electrical outputs and convert them to temperature according to the International Temperature Scale of 1990 (ITS-90).

Thermometers are typically calibrated by placing them in a stable temperature environment (heat source) and comparing their output to that of a calibrated reference thermometer or standard

thermometer. Fluke Calibration provides three general categories of heat sources: industrial heat sources (dry-well calibrators, portable calibration baths, Micro-Baths, etc.) for field use; fluid baths and thermocouple furnaces for laboratory use; and fixed-point cells for primary calibrations. Fluke Calibration also offers a variety of reference thermometers, including SPRTs, and thermometer readout instruments.

In addition, Fluke Calibration provides laboratory and field solutions for calibrating the electronics used in temperature measurement circuits.

## Product highlights



### 6109A/7109A Portable Calibration Baths

#### **Four times more calibration throughput with twice the accuracy of Micro-Baths and dry-block calibrators**

Now there are portable calibration baths (6109A and 7109A) designed with the process manufacturing professional in mind. Process manufacturing plants for pharmaceuticals, biotechnology, and food production utilize many sanitary temperature sensors that require regular calibration. Production must stop during temperature sensor calibration. Therefore, more calibration throughput means less plant downtime.

The Fluke Calibration 6109A and 7109A Portable Calibration Baths are liquid baths that let process industry professionals calibrate four times more sanitary sensors per batch in less time and with twice the accuracy of other portable baths in this class. Larger than micro baths, up to four tri-clamp sanitary sensors fit easily into these baths for calibration at  $\pm 0.1$  °C temperature display accuracy. Calibrate up to four tri-clamp sanitary sensors at the same time.

- Wide temperature ranges cover most process applications
  - 6109A: 35 °C to 250 °C
  - 7109A: -25 °C to 140 °C
- Excellent display accuracy of  $\pm 0.1$  °C provides 4:1 test uncertainty ratio for critical applications
- Stainless steel casing withstands harsh sterilizing chemicals and is rust proof
- NVLAP-accredited calibration included standard



### 1586A Super-DAQ Precision Temperature Scanner

#### **The most accurate, flexible temperature data acquisition system**

The 1586A is ideal for benchtop calibration of temperature sensors in secondary calibration labs, as well as temperature data acquisition applications in industries such as pharmaceutical, biotechnology, aerospace, food and energy where accurate temperature measurements are critical.

- Flexible configuration for the benchtop or factory using the DAQ-STAQ Multiplexer or internal High-Capacity Module
- Measure thermocouples, PRTs, thermistors, dc V, dc I, and resistance
- Best-in-class temperature measurement accuracy:
  - PRTs:  $\pm 0.005$  °C (using DAQ-STAQ Multiplexer)
  - Thermocouples:  $\pm 0.29$  °C (using DAQ-STAQ Multiplexer and internal CJC for type K at 0 °C)
  - Thermistors:  $\pm 0.002$  °C
- Connect up to 40 isolated inputs
- Scan speed of up to 10 channels per second
- Four modes of operation: Scan, Monitor, Measure, DMM
- Real-time color trending—chart up to four channels simultaneously
- Controls Fluke Calibration temperature sources such as dry-wells, furnaces or Micro-Baths for automated calibration routines
- MX + B scaling and channel offset zero function
- Built-in data security levels

# Selection guides

## Primary standards

Standard platinum resistance thermometers (SPRTs)		
Model	RTPW	Description
5681	25.5 Ω	-200 °C to 670 °C, quartz sheath
5683	25.5 Ω	-200 °C to 480 °C, quartz sheath
5684	0.25 Ω	0 °C to 1070 °C, quartz sheath
5685	2.5 Ω	0 °C to 1070 °C, quartz sheath
5698	25.5 Ω	-200 °C to 670 °C, working standard, quartz sheath
5699	25.5 Ω	-200 °C to 670 °C, high temperature, metal sheath
5686	25.5 Ω	-260 °C to 232 °C, glass capsule

## ITS-90 fixed-point cells

Model	Description	Temperature
<b>Triple point of water cells</b>		
5901A-G	TPW Cell, 12 mm ID with handle, glass shell	0.01 °C
5901A-Q	TPW Cell, 12 mm ID with handle, quartz shell	0.01 °C
5901C-G	TPW Cell, 13.6 mm ID with handle, glass shell	0.01 °C
5901C-Q	TPW Cell, 13.6 mm ID with handle, quartz shell	0.01 °C
5901D-G	TPW Cell, 12 mm ID, glass shell	0.01 °C
5901D-Q	TPW Cell, 12 mm ID, quartz shell	0.01 °C
5901B-G	TPW Cell, mini, glass shell	0.01 °C
<b>Standard size fixed-point cells</b>		
5900E	TP mercury, SST	-38.8344 °C
5904	Freezing point of indium	156.5985 °C
5905	Freezing point of tin	231.928 °C
5906	Freezing point of zinc	419.527 °C
5907	Freezing point of aluminum	660.323 °C
5908	Freezing point of silver	961.78 °C
5909	Freezing point of copper	1084.62 °C
5924	Open freezing point of indium	156.5985 °C
5925	Open freezing point of tin	231.928 °C
5926	Open freezing point of zinc	419.527 °C
5927A	Open freezing point of aluminum	660.323 °C
5928	Open freezing point of silver	961.78 °C
5929	Open freezing point of copper	1084.62 °C
5943	Melting point of gallium, SST	29.7646 °C
<b>Mini triple point of water and fixed-point cells</b>		
5901B	Mini triple point of water	0.01 °C
5914A	Mini freezing point of indium	156.5985 °C
5915A	Mini freezing point of tin	231.928 °C
5916A	Mini freezing point of zinc	419.527 °C
5917A	Mini freezing point of aluminum	660.323 °C
5918A	Mini freezing point of silver	961.78 °C
5919A	Mini freezing point of copper	1084.62 °C
5944	Mini freezing point of indium, metal cased	156.5985 °C
5945	Mini freezing point of tin, metal cased	231.928 °C
5946	Mini freezing point of zinc, metal cased	419.527 °C
5947	Mini freezing point of aluminum, metal cased	660.323 °C

Model	Features/use
<b>Maintenance apparatus</b>	
7012	Maintains: triple point of water and gallium cells. Comparisons: -10 °C to 110 °C.
7037	Maintains: triple point of water and gallium cells. Comparisons: -40 °C to 110 °C.
7312	Maintains: two TPW cells. Compact size, runs quietly. Comparisons: -5 °C to 110 °C.
7341	Maintains: triple point of mercury cell. Comparisons: -45 °C to 150 °C.
9210	Maintains: mini triple point of water. Comparisons: -10 °C to 125 °C.
9230	Maintains: stainless steel gallium cell. Comparisons: 15 °C to 35 °C.
9260	Maintains: indium, tin, zinc, and aluminum cells. Comparisons: 50 °C to 680 °C.
9114	Maintains: indium, tin, zinc, and aluminum cells. Comparisons: 100 °C to 680 °C.
9115A	Maintains: aluminum and silver cells. Comparisons: 550 °C to 1000 °C.
9116A	Maintains: aluminum, silver, gold, and copper cells. Comparisons: 400 °C to 1100 °C.
9117	Anneals SPRTs, HTPRTs, and thermocouples to 1100 °C. Protects them against contamination from metal ions.
<b>Boiling point of liquid nitrogen</b>	
7196	Affordable substitute for a triple point of argon system. Provides for low-temperature comparison calibrations at approximately -196 °C with uncertainties of 2 mK.
<b>Triple point of argon system</b>	
5960A	Lowest uncertainty for any commercially available triple point of argon system.
<b>Standard resistors</b>	
742A	Excellent performance without oil or air baths. Values from 1 ohm to 19 megohm.

## Thermometer readouts

<b>Intrinsically safe thermometers</b>			
1551A Ex	100 $\Omega$ thin-film RTD	-50 °C to 160 °C (-58 °F to 320 °F)	Accuracy of $\pm 0.05$ °C ( $\pm 0.09$ °F) over full range. Intrinsically safe (ATEX and IECEx compliant). Two models to choose from (-50 °C to 160 °C or -80 °C to 300 °C)
1552A Ex	100 $\Omega$ wire-wound PRT	-80 °C to 300 °C (-112 °F to 572 °F)	
<b>Precision digital thermometer readouts</b>			
Model	Probe types	Accuracy at 0 °C	Features
<b>Tweener</b>			
1502A	PRTs	$\pm 0.006$ °C	Resolution of 0.001 °C and accuracy to match; uses ITS-90, IPTS-68, CVD, or DIN (IEC 751) conversions
1504	Thermistors	$\pm 0.002$ °C	Reads thermistors from 0 to 500 KW; uses Steinhart-Hart and CVD
<b>Handheld</b>			
1523	PRTs, Thermistors, Thermocouples	$\pm 0.015$ °C (PRTs)	Battery-powered, handheld reference thermometer; INFO-CON connector reads coefficients without programming; saves 25 readings on demand; graphs trends
1524	PRTs, Thermistors, Thermocouples	$\pm 0.015$ °C (PRTs)	Handheld reference thermometer same as 1523 but with inputs for two thermometers; logs up to 15,000 readings and stores 25 more on demand
<b>Chub-E4</b>			
1529	PRTs, Thermistors, Thermocouples	$\pm 0.006$ °C (PRTs)	Four channels can all be measured simultaneously; battery-powered; logs up to 8,000 readings; flexible display
<b>Super-Thermometers</b>			
1594A	SPRTs, PRTs, Thermistors	$\pm 0.00006$ °C	Ratio accuracy of 0.8 ppm; temperature-controlled internal reference resistors; six input channels
1595A	SPRTs, PRTs, Thermistors	$\pm 0.000015$ °C	Ratio accuracy of 0.2 ppm; Ratio Self-Calibration; automated zero-power measurements
<b>Multi-channel</b>			
1586A	PRTs, Thermistors, Thermocouples	$\pm 0.005$ °C (PRTs)	40 channels with scan rate of 10 channels per second
1560	Accepts any combination of the modules below; all are easily added to and removed from the 1560 Black Stack base		
2560	SPRTs, PRTs	$\pm 0.005$ °C	2 channels of 25W or 100W PRTs
2561	HTPRTs	$\pm 0.013$ °C	2 channels to 1200 °C
2562	PRTs	$\pm 0.01$ °C	8 channels of 2-, 3-, or 4-wire RTDs
2563	Thermistors	$\pm 0.0013$ °C	2 channels of resolution to 0.0001 °C
2564	Thermistors	$\pm 0.0025$ °C	8 channels for data acquisition
2565	Thermocouples	$\pm 0.05$ °C	Reads most TC types with 0.0001 mV resolution
2566	Thermocouples	$\pm 0.1$ °C	Reads any combination up to 12 channels of virtually any type of TC
2567	1000 $\Omega$ PRTs	$\pm 0.006$ °C	2 channels of high-resistance PRTs
2568	1000 $\Omega$ PRTs	$\pm 0.01$ °C	8 channels of high-resistance PRTs
<b>Thermo-hygrometer</b>			
1620A	The DewK Thermo-Hygrometer	Two channels measure ambient temperature to $\pm 0.125$ °C and %RH to $\pm 1.5$ %. Onboard memory holds up to two years of time/date-stamped readings. Visual and audio alarms. Detachable sensors contain their own calibration data for easy recalibrations. Ethernet and wireless capabilities.	



## Thermometer probes

Platinum resistance thermometers (PRTs)			
Model	Range	Size	Basic Accuracy†
<b>Secondary standard PRT</b>			
5608-9-X	-200 °C to 500 °C	229 mm x 3.18 mm (9 in x 0.125 in)	Select from available calibration options
5608-12-X	-200 °C to 500 °C	305 mm x 3.18 mm (12 in x 0.125 in)	
5609-12-X	-200 °C to 670 °C	305 mm x 6.35 mm (12 in x 0.25 in)	
5609-15-X	-200 °C to 670 °C	381 mm x 6.35 mm (15 in x 0.25 in)	
5609-20-X	-200 °C to 670 °C	508 mm x 6.35 mm (20 in x 0.25 in)	
5609-300-X	-200 °C to 670 °C	300 mm x 6 mm (11.81 in x 0.24 in)	
5609-400-X	-200 °C to 670 °C	400 mm x 6 mm (15.75 in x 0.24 in)	
5609-500-X	-200 °C to 670 °C	500 mm x 6 mm (19.69 in x 0.24 in)	
5626	-200 °C to 661 °C	305 or 381 mm x 6.35 mm (12 or 15 in x 0.25 in)	± 0.007 °C at 0 °C
5628	-200 °C to 661 °C	305 or 381 mm x 6.35 mm (12 or 15 in x 0.25 in)	± 0.006 °C at 0 °C
<b>Secondary reference PRT</b>			
5615-6	-200 °C to 300 °C	152 mm x 4.76 mm (6 in x 0.19 in)	± 0.013 °C at 0.010 °C
5615-9	-200 °C to 420 °C	229 mm x 4.76 mm (9 in x 0.19 in)	± 0.013 °C at 0.010 °C
5615-12	-200 °C to 420 °C	305 mm x 6.35 mm (12 in x 0.25 in)	± 0.013 °C at 0.010 °C
<b>Precision industrial PRT</b>			
5627A-6	-200 °C to 300 °C	152 mm x 4.7 mm (6 in x 0.19 in)	± 0.05 °C at 0 °C
5627A-9	-200 °C to 300 °C	229 mm x 4.7 mm (9 in x 0.19 in)	± 0.05 °C at 0 °C
5627A-12	-200 °C to 420 °C	305 mm x 6.35 mm (12 in x 0.25 in)	± 0.05 °C at 0 °C
<b>Fast response PRT</b>			
5622-05	-200 °C to 350 °C	100 mm x 0.5 mm (3.94 in x 0.02 in)	± 0.04 °C at 0 °C
5622-10	-200 °C to 350 °C	100 mm x 1.0 mm (3.94 in x 0.04 in)	± 0.04 °C at 0 °C
5622-16	-200 °C to 350 °C	200 mm x 1.6 mm (7.87 in x 0.06 in)	± 0.04 °C at 0 °C
5622-32	-200 °C to 350 °C	200 mm x 3.2 mm (7.87 in x 0.125 in)	± 0.04 °C at 0 °C
<b>Small diameter industrial PRTs</b>			
5618B-6	-200 °C to 300 °C	152 mm x 3.2 mm (6 in x 0.125 in)	± 0.05 °C
5618B-9	-200 °C to 500 °C	229 mm x 3.2 mm (9 in x 0.125 in)	± 0.05 °C
5618B-12	-200 °C to 500 °C	305 mm x 3.2 mm (12 in x 0.125 in)	± 0.05 °C
<b>Full immersion PRTs</b>			
5606 Immersion PRT	-200 °C to 160 °C	50 mm x 3.2 mm (1.97 in x 0.125 in)	± 0.05 °C
5623B Freezer Probe	-100 °C to 156 °C	152 mm x 6.35 mm (6 in x 0.25 in)	± 0.05 °C
<b>High temperature PRT</b>			
5624	0 °C to 1000 °C	508 mm x 6.35 mm (20 in x 0.25 in)	± 0.055 °C
<b>Thermistors</b>			
<b>Standards</b>			
5640	0 °C to 60 °C	229 mm x 6.35 mm (9 in x 0.25 in)	± 0.0015 °C
5641	0 °C to 60 °C	114 mm x 3.2 mm (4.5 in x 0.125 in)	± 0.001 °C
5642	0 °C to 60 °C	229 mm x 3.2 mm (9 in x 0.125 in)	± 0.001 °C
5643	0 °C to 100 °C	114 mm x 3.2 mm (4.5 in x 0.125 in)	± 0.0025 °C
5644	0 °C to 100 °C	229 mm x 3.2 mm (9 in x 0.125 in)	± 0.0025 °C
<b>Secondary probes</b>			
5610	0 °C to 100 °C	152 or 229 mm x 3.2 mm (6 or 9 in x 0.125 in)	± 0.01 °C
5611A	0 °C to 100 °C	1.5 mm (0.06 in) tip dia.	± 0.01 °C
5611T	0 °C to 100 °C	28 mm x 3 mm (1.1 in x 0.12 in)	± 0.01 °C
5665	0 °C to 100 °C	76 mm x 3.2 mm (3 in x 0.125 in)	± 0.01 °C
<b>Thermocouples</b>			
<b>Type R and S standards</b>			
5649/5650-20	0 °C to 1450 °C	508 mm x 6.35 mm (20 in x 0.25 in)	± 0.7 °C at 1100 °C
5649/5650-20C	0 °C to 1450 °C	508 mm x 6.35 mm (20 in x 0.25 in)	± 0.7 °C at 1100 °C
5649/5650-25	0 °C to 1450 °C	635 mm x 6.35 mm (25 in x 0.25 in)	± 0.7 °C at 1100 °C
5649/5650-25C	0 °C to 1450 °C	635 mm x 6.35 mm (25 in x 0.25 in)	± 0.7 °C at 1100 °C

†“Basic Accuracy” includes calibration uncertainty and short-term repeatability. It does not include long-term drift.

## Calibration baths

Compact calibration baths			
Model	Range	Stability	Depth
6332A*	50 °C to 300 °C (122 °F to 572 °F)	± 0.01 °C	450 mm (17.7 in)
7342A*	-40 °C to 150 °C (-40 °F to 302 °F)	± 0.01 °C	450 mm (17.7 in)
6330	35 °C to 300 °C (95 °F to 572 °F)	± 0.005 °C at 100 °C ± 0.015 °C at 300 °C	234 mm (9.25 in)
7320	-20 °C to 150 °C (-4 °F to 302 °F)	± 0.005 °C at -20 °C ± 0.005 °C at 25 °C	234 mm (9.25 in)
7340	-40 °C to 150 °C (-40 °F to 302 °F)	± 0.005 °C at -40 °C ± 0.005 °C at 25 °C	234 mm (9.25 in)
7380	-80 °C to 100 °C (-112 °F to 212 °F)	± 0.006 °C at -80 °C ± 0.010 °C at 0 °C	178 mm (7 in)
6331	35 °C to 300 °C (95 °F to 572 °F)	± 0.015 °C at 300 °C ± 0.005 °C at -20 °C	457 mm (18 in)
7321	-20 °C to 150 °C (-4 °F to 302 °F)	± 0.005 °C at 25 °C ± 0.005 °C at -40 °C	457 mm (18 in)
7341	-45 °C to 150 °C (-49 °F to 302 °F)	± 0.005 °C at -40 °C ± 0.005 °C at 25 °C	457 mm (18 in)
7381	-80 °C to 110 °C (-112 °F to 230 °F)	± 0.006 °C at -80 °C ± 0.005 °C at 0 °C	457 mm (18 in)
Standard size calibration baths			
7080	-80 °C to 110 °C (-112 °F to 230 °F)	± 0.0025 °C at -80 °C ± 0.0015 °C at 25 °C	305 mm (12 in)
7008	-5 °C to 110 °C (23 °F to 230 °F)	± 0.0007 °C at 25 °C ± 0.0008 °C at 0 °C	331 mm (13 in)
7011	-10 °C to 110 °C (14 °F to 230 °F)	± 0.0008 °C at 25 °C ± 0.0008 °C at 0 °C	305 mm (12 in)
7040	-40 °C to 110 °C (-40 °F to 230 °F)	± 0.0015 °C at 25 °C ± 0.001 °C at 40 °C	305 mm (12 in)
6020	40 °C to 300 °C (104 °F to 572 °F)	± 0.005 °C at 300 °C ± 0.001 °C at 40 °C	305 mm (12 in)
6022	40 °C to 300 °C (104 °F to 572 °F)	± 0.005 °C at 300 °C ± 0.001 °C at 40 °C	464 mm (18.25 in)
6024	40 °C to 300 °C (104 °F to 572 °F)	± 0.005 °C at 300 °C ± 0.002 °C at 200 °C	337 mm (13.25 in)
6050H	180 °C to 550 °C (356 °F to 1022 °F)	± 0.007 °C at 500 °C ± 0.006 °C at -80 °C	305 mm (12 in)
Other			
Item	Description		
Bath accessories	Stands, rods, and clamps to suspend and support your probes and thermometers.		
Bath fluids	Silicone oils, salt, and cold fluids in convenient, small quantities.		
Rosemount bath controllers	Model 7900 controller designed by Hart integrates the features of Hart's 2100 controller and can be used in place of the Rosemount 915 controller with Rosemount-designed baths.		
Fluke Calibration bath controllers	Model 2100 and 2200 controllers can be integrated with homemade baths or other heat sources to achieve performance levels approaching Fluke Calibration baths.		

\*Not for sale in Europe

## Industrial temperature calibrators

<b>Field metrology wells</b>		
Model	Range	Accuracy
9190A	-95 °C to 140 °C (-139 °F to 284 °F)	± 0.2 °C
9142	-25 °C to 150 °C (-13 °F to 302 °F)	± 0.2 °C
9143	33 °C to 350 °C (91 °F to 662 °F)	± 0.2 °C
9144	50 °C to 660 °C (122 °F to 1220 °F)	± 0.35 °C at 50 °C ± 0.35 °C at 420 °C ± 0.5 °C at 660 °C
<b>Portable calibration baths</b>		
6109A	35 °C to 250 °C (95 °F to 482 °F)	± 0.1 °C
7109A	-25 °C to 140 °C (-13 °F to 284 °F)	± 0.1 °C
<b>Micro-Baths</b>		
6102	35 °C to 200 °C (95 °F to 392 °F)	± 0.25 °C
7102	-5 °C to 125 °C (23 °F to 257 °F)	± 0.25 °C
7103	-30 °C to 125 °C (-22 °F to 257 °F)	± 0.25 °C
<b>Handheld dry-wells</b>		
9100S	35 °C to 375 °C (95 °F to 707 °F)	± 0.25 °C at 100 °C ± 0.5 °C at 375 °C
9102S	-10 °C to 122 °C (14 °F to 252 °F)	± 0.25 °C
<b>Field dry-wells</b>		
9009	-15 °C to 350 °C (5 °F to 662 °F)	Cold block: ± 0.2 °C Hot block: ± 0.6 °C
9103	-25 °C to 140 °C (-13 °F to 284 °F)	± 0.25 °C
9140	35 °C to 350 °C (95 °F to 662 °F)	± 0.5 °C
<b>Infrared calibrators</b>		
4180	-15 °C to 120 °C (5 °F to 248 °F)	± 0.40 °C at -15 °C ± 0.40 °C at 0 °C ± 0.50 °C at 50 °C ± 0.50 °C at 100 °C ± 0.55 °C at 120 °C
4181	35 °C to 500 °C (95 °F to 932 °F)	± 0.35 °C at 35 °C ± 0.50 °C at 100 °C ± 0.70 °C at 200 °C ± 1.20 °C at 350 °C ± 1.60 °C at 500 °C
9132	50 °C to 500 °C (122 °F to 932 °F)	± 0.5 °C at 100 °C ± 0.8 °C at 500 °C
9133	-30 °C to 150 °C (-22 °F to 302 °F)	± 0.4 °C
<b>Metrology Wells</b>		
9170	-45 °C to 140 °C (-49 °F to 284 °F)	± 0.1 °C
9171	-30 °C to 155 °C (-22 °F to 311 °F)	± 0.1 °C
9172	35 °C to 425 °C (95 °F to 797 °F)	± 0.1 °C at 100 °C ± 0.15 °C at 225 °C ± 0.2 °C at 425 °C
9173	50 °C to 700 °C (122 °F to 1292 °F)	± 0.2 °C at 425 °C ± 0.25 °C at 660 °C
<b>Zero point dry-well</b>		
9101	0 °C (32 °F)	± 0.05 °C
<b>Dual block dry-well</b>		
9011	50 °C to 670 °C (122 °F to 1238 °F)	± 0.2 °C at 50 °C ± 0.4 °C at 400 °C ± 0.65 °C at 600 °C
	-30 °C to 140 °C (-22 °F to 284 °F)	± 0.25 °C (insert wells) ± 0.65 °C (fixed wells)
<b>Thermocouple furnaces</b>		
9150	150 °C to 1200 °C (302 °F to 2192 °F)	± 5 °C
9118A	300 °C to 1200 °C (572 °F to 2192 °F)	± 5 °C



5681, 5683, 5684, and 5685



5698-25



5686-B




5699



5901



ITS-90



Mini Fixed-Point Cells

## Standard platinum resistance thermometers (SPRTs)

### 5681, 5683, 5684, and 5685 Quartz-Sheath SPRTs

The performance you expect from world-class SPRTs.

- Drift rates as low as 0.0005 K
- Proprietary gas mixtures ensures high stability
- Most experienced SPRT design team in the business

### 5698-25 Working Standard SPRT

High performance-to-price ratio.

- Conforms to ITS-90 SPRT Guidelines
- Drift rate typically 0.003 °C
- Calibration options by fixed point

### 5686-B Glass Capsule SPRT

Designed for metrology work requiring small SPRTs.

- Temperatures from -260 °C (13 K) to 232 °C
- Stability typically 0.001 °C over 100 °C range
- Miniature capsule package eliminates stem conduction

### 5699 High-Temperature Metal-Sheath SPRT

Affordable working standard SPRT.

- Range to aluminum point (660 °C)
- Inconel™ sheaths guard against contamination of sensor
- Drift rates less than 8 mK/year

## ITS-90 fixed-point cells

### 5901 Triple Point of Water Cells

Must-have, primary temperature standards.

- Easy-to-use, inexpensive standard with uncertainty better than  $\pm 0.0001$  °C
- Four sizes and two shells (glass and quartz) to choose from
- Isotopic composition of Vienna Standard Mean Ocean Water

### ITS-90 Fixed-Point Cells

Best cell uncertainties commercially available.

- Every ITS-90 fixed point available from mercury to copper
- Plateaus last days (gallium for weeks and TPW for months)
- Manufactured and tested by Fluke Calibration's primary standards scientists

### Mini Fixed-Point Cells

Least expensive, easiest-to-use fixed-point standards.

- Lower uncertainties than comparison calibrations
- All ITS-90 fixed points from TPW to copper
- Reduced equipment and annual recalibration costs



9114, 9115A, 9116A



9117



7196B



9210



9230



9260



7312

## Cell maintenance apparatus

### 9114, 9115A, 9116A Freeze-Point Furnaces

Designed for maximum-length plateaus.

- Designed to extend plateaus
- High-stability OEM controllers, RS-232 included
- External cooling coils

### 9210 Mini Triple Point of Water Maintenance Apparatus

Simple supercool-and-shake realization and maintenance of the 5901B Mini TPW Cell.

- Easy preprogrammed realization
- Inexpensive fixed-point solution
- Training complete in less than an hour

### 9230 Gallium Cell Maintenance Apparatus

Realize and maintain the melting point of the 5943 Gallium Cell.

- One week plateau duration
- No hassle automatic realizations
- Used daily in our Primary Lab

### 9260 Mini Fixed-Point Cell Furnace

Inexpensive, easy-to-use fixed-point maintenance apparatus.

- Realize and maintain In, Sn, Zn and Al fixed-point cells
- Good introduction to fixed-point calibration
- User friendly and inexpensive

### 7012/7312 Triple Point of Water Maintenance Baths

Keep your cells up and running reliably for weeks at a time.

- Maintains TPW cells for up to six weeks
- Optional immersion freezer for simple cell freezing
- Up to 496 mm (19.5 in) of immersion depth

### 9117 Annealing Furnace

Keeps SPRTs and PRTs performing at their highest levels.

- Relieves mechanical strain
- Guards against contamination
- Anneals both SPRTs and HTSPRTs

### 7196B LN<sub>2</sub> Comparison Calibrator

Lowest-cost calibration to -196 °C.

- Simple to use
- Uncertainty less than 2 mK



1586A



DAQ-STAQ Multiplexer



1594A/1595A



1560



1529



1502A/1504



1523/1524



1551A Ex and 1552A Ex

## Thermometer readouts

### 1586A Super-DAQ Precision Temperature Scanner and DAQ-STAQ Multiplexer

Best-in-class temperature measurement accuracy and up to 40 isolated input channels for measuring RTDs, thermocouples, thermistors, dc voltage, dc current, and resistance.

- PRTs:  $\pm 0.005\text{ }^{\circ}\text{C}$ ;  
Thermocouples:  $\pm 0.29\text{ }^{\circ}\text{C}$ ;  
Thermistors:  $\pm 0.002\text{ }^{\circ}\text{C}$
- Scan speed of up to 10 channels per second
- Real-time color trending—chart up to four channels simultaneously
- Control Fluke Calibration temperature sources such as dry-wells or Micro-Baths for automated calibration routines

### 1594A/1595A Super-Thermometers

Thermometry bridge accuracy combined with time-saving features.

- Calibrate SPRTs, PRTs, RTDs and thermistors ( $0\ \Omega$  to  $500\ \text{k}\Omega$ )
- Accuracy as good as  $0.06\ \text{ppm}$  ( $0.000015\text{ }^{\circ}\text{C}$ )
- Ratio Self-Calibration verifies and calibrates resistance ratio accuracy

### 1560 Black Stack Thermometer Readout

Accurate, expandable and configurable readout.

- Reads SPRTs, RTDs, thermistors, and thermocouples
- Any configuration you like up to eight modules
- High-accuracy reference thermometer (to  $\pm 0.0013\text{ }^{\circ}\text{C}$ )

### 1529 Chub-E4 Standards Thermometer

Lab-quality accuracy on four channels for PRTs, thermistors and thermocouples.

- Four channels for PRTs, thermistors, and thermocouples
- Displays eight user-selected data fields from any channel
- Logs up to 8,000 readings with date and time stamps

### 1502A/1504 Reference Thermometers

Best performance thermometers in their price range.

- Single-channel reference thermometers
- Two models to choose from—reading PRTs or thermistors
- Best price/performance package

### 1523/1524 Reference Thermometers

Measure, graph and record three sensor types with one tool.

- High accuracy: PRTs:  $\pm 0.011\text{ }^{\circ}\text{C}$ ;  
Thermocouples:  $\pm 0.24\text{ }^{\circ}\text{C}$ ; Thermistors:  $\pm 0.002\text{ }^{\circ}\text{C}$
- A simple user interface to see trends quickly
- Smart connectors to load probe information automatically

### 1551A Ex and 1552A Ex Stik Thermometer

The best substitute for precision mercury-filled glass thermometers.

- Accuracy of  $\pm 0.05\text{ }^{\circ}\text{C}$  ( $\pm 0.09\text{ }^{\circ}\text{F}$ ) over full range
- Intrinsically safe (ATEX and IECEx compliant)
- Two models to choose from ( $-50\text{ }^{\circ}\text{C}$  to  $160\text{ }^{\circ}\text{C}$  or  $-80\text{ }^{\circ}\text{C}$  to  $300\text{ }^{\circ}\text{C}$ )


### 1620A Digital Thermometer-Hygrometer

The most accurate temperature and humidity graphical data logger on the market.

- Superior accuracy
- Network enabled
- Powerful logging and analysis tools



1620A

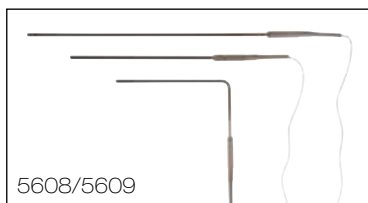

5608/5609



5626/5628

## Secondary standard PRTs

### 5608/5609 Secondary PRTs

Very stable thermometer from -200 °C to 670 °C.

- 5608: -200 °C to 500 °C (80 mm minimum immersion)
- 5609: -200 °C to 670 °C (100 mm minimum immersion)
- Calibration not included, NVLAP-accredited calibration optional, lab code 200348-0

### 5615 Secondary PRT

Reference-grade platinum sensing element.

- -200 °C to 420 °C
- ± 0.012 °C accuracy at 0 °C
- Drift of ± 0.007 °C after 100 hours at max temperature

### 5626/5628 Secondary SPRT, PRT, Temperature Sensors

High-temperature secondary standards.

- -200 °C to 661 °C
- Meets all ITS-90 requirements for resistance ratios
- Rtp drift < 20 mK after 500 hours at 661°C

## Thermistor standards

### 5640 Series Thermistor Standards Probes

High accuracy temperature probes with excellent stability.

- Accuracy to ± 0.001 °C
- Affordable system accuracy to ± 0.004 °C or better
- NIST-traceable calibration included from manufacturer



5615

## High temperature PRT

### 5624 Platinum Resistance Thermometer

Precision PRT accuracy at thermocouple temperatures.

- Temperature range of 0 °C to 1000 °C
- Accuracy of ± 0.05 °C to 962 °C (includes short-term stability and calibration uncertainty)
- Long-term drift of 0.01 °C at 0 °C after 100 hours at 1000 °C

## Thermocouple standards

### 5649/5650 Type R and Type S Thermocouple Standards

Eight models to fit any type R or S thermocouple applications.

- 0 °C to 1450 °C
- Two sizes available, each with or without reference junction
- Optional fixed-point calibration, uncalibrated accuracy is the greater of ± 0.6 °C or ± 0.1 % of reading

## Precision industrial PRTs

### 5627A Precision Industrial PRTs

Durable PRTs with temperature range to 420 °C and accuracy to 0.025 °C.

- Vibration and shock resistant
- NVLAP-accredited calibration included, lab code 200706-0



5640

## Fast response PRTs

### 5622 Fast Response PRTs

Designed for temperature measurements requiring fast response or short immersion over a wide range.

- Time constants as fast as 0.4 seconds
- Available as DIN/IEC Class A PRTs or with NVLAP-accredited calibration, lab code 200348-0
- Small probe diameters ranging from 0.5 mm to 3.2 mm

## Small diameter industrial PRTs

### 5618B Small Diameter Industrial RTD

Secondary level performance with full ITS-90 calibration.

- Small diameter sheath, 3.2 mm (0.125 in)
- Excellent stability
- Includes ITS-90 coefficients

## Full immersion PRTs

### 5606 Full Immersion PRT

PRTs for laboratory freezers, autoclaves, and furnaces.


- Transition junction designed to withstand full temperature range of probe
- 5606: -200 °C to 160 °C
- Calibration accuracy of ± 0.05 °C

## Secondary thermistor probes


### 5610/5611/5611T/5665 Secondary Reference Thermistor Probes

Lab-grade thermistors probes for accurate work across a narrow temperature range.

- Short-term accuracy to ± 0.01 °C; one-year drift < ± 0.01 °C
- Accredited NVLAP calibration optional
- Flexible Teflon and silicone coated fast-response models




5622



5649/5650



5627A



5622



5618B



5606



5610/5611/  
5611T/5665



6330/7320/7340/7380



6331/7321/7341/7381



7312



6020/6022/6024



6050H



7008/7040/7037/7012/7011



6332A/7342A



7080

## Compact calibration baths

### 6332A/7342A Temperature Calibration Baths

Fast, 0.01 °C stability baths backed by Fluke metrology, with a deep tank for calibrating PRTs and liquid-in-glass thermometers.

- Wide temperature range
  - 6332A: 50 °C to 300 °C
  - 7342A: -40 °C to 150 °C
- Stability 0.01 °C
- Uniformity (working area)
  - 6332A: 0.015 °C (50 °C to 200 °C), 0.02 °C (201 °C to 300 °C)
  - 7342A: 0.01 °C (full range)

Note: The 6332A/7342A baths are not for sale in Europe.

### 6330/7320/7340/7380 Compact Temperature Calibration Baths

Compact baths with the stability and uniformity required for thermometer calibration.

- Stability and uniformity each better than  $\pm 0.008$  °C
- Metrology-level performance in lab-friendly sizes
- Convenient use on benchtops or on matching carts

### 6331/7321/7341/7381 Deep-Well Compact Baths

Ample immersion depth and great stability, in a high value compact bath.

- 457 mm (18 in) of depth with just 15.9 liters (4.2 gal) of fluid
- Perfect for liquid-in-glass thermometers with optional LIG kit
- Fast, quiet, compact (yet deep), and economical

### 7312 Triple Point of Water Maintenance Bath

Keep your cells up and running reliably for weeks at a time.

- Maintains TPW cells for up to six weeks
- Optional immersion freezer for simple cell freezing
- Independent cutout circuit protects cells from breaking

## Standard calibration baths

### 6020/6022/6024 High Temperature Calibration Oil Baths

Stable, uniform heat sources for calibrations up to 300 °C.

- Stability as good as 0.001°C
- Large-capacity tanks for higher productivity
- Built-in cooling coils for external cooling sources

### 6050H Extremely High Temperature Calibration Salt Bath

Designed for high-temperature calibration—up to 550 °C.

- Eliminates messy sand baths
- Electronically adjustable temperature cutouts
- Stability of  $\pm 0.008$  °C at 550 °C

### 7008/7040/ 7037/ 7012/7011 Cold Temperature Calibration Baths

High stability means low calibration uncertainties—no other bath performs this well.

- Stability to  $\pm 0.0007$  °C
- Best digital temperature controller available
- Super Tweak function provides set-point resolution to 0.00003 °C

### 7080 Really Cold Temperature Calibration Baths

Cool to -40, -60, or -80 °C without external coolants.

- Self-contained refrigeration—no LN2 or chiller required
- Temperatures as low as -80 °C in real metrology baths
- Stability of  $\pm 0.0025$  °C at -80 °C





6054/6055



2100 and 2200



7900



7009/7108/7015



9170/9171/9172/9173



9190A



9142/9143/9144

## Special application baths

### 6054/6055 Deep-Well Baths

Extra-deep wells for thermometry work requiring extra tank depth and ultimate stability.

- Constant liquid levels through concentric-tube design
- Special design for sighting LIG thermometers
- Depth up to 60 cm (24 in)

### 7009/7108/7015 Resistor Baths

Three size options for any quantity of resistors.

- Stability to  $\pm 0.0007\text{ }^{\circ}\text{C}$
- Independent high- and low-temperature cutout circuit

## Bath controllers

### 2100 and 2200 Benchtop Temperature Controllers

Most stable temperature controllers available.

- Resolution as high as  $0.00018\text{ }^{\circ}\text{C}$
- RS-232 interface included for automating applications

### 7900 Controller for Rosemount-Designed Baths

All the features of the Fluke Calibration 2100 Controller.

- Installs easily
- Two independent over-temperature cutout circuits

## Metrology Wells

### 9170/9171/9172/9173 Metrology Well Calibrators

Accurate enough for lab use yet rugged and portable.

- Best-performing industrial heat sources (accuracy, stability, uniformity) in the world
- $-45\text{ }^{\circ}\text{C}$  to  $700\text{ }^{\circ}\text{C}$
- Immersion depth to 203 mm (8 in)
- Optional ITS-90 reference input reads PRTs to  $\pm 0.006\text{ }^{\circ}\text{C}$

## Field Metrology Wells

### 9190A Ultra-Cool Field Metrology Well

Ultra-cool dry-block calibrator with best-in-class stability.

- Wide temperature range from  $-95\text{ }^{\circ}\text{C}$  to  $140\text{ }^{\circ}\text{C}$
- Best-in-class stability:  $\pm 0.015\text{ }^{\circ}\text{C}$  full range
- Accuracy using built-in reference thermometer readout:  $\pm 0.05\text{ }^{\circ}\text{C}$  full range
- Display accuracy:  $\pm 0.2\text{ }^{\circ}\text{C}$  full range

### 9142/9143/9144 Field Metrology Wells

Small dry wells for big field applications.

- Lightweight, portable, and fast
- Cool to  $-25\text{ }^{\circ}\text{C}$  in 15 minutes and heat to  $660\text{ }^{\circ}\text{C}$  in 15 minutes
- Built-in two-channel readout for PRT, RTD, thermocouple, 4–20 mA current



9103



9011



6102/7102/7103



9140



9100S/9102S



9009



6109A/7109A

## Dual-block dry-well

### 9011 High-Accuracy Dual-Well Calibrator

Widest temperature range available in a single dry-well.

- Combined range from  $-30\text{ }^{\circ}\text{C}$  to  $670\text{ }^{\circ}\text{C}$ , one unit—two blocks
- Two independent temperature controllers (hot and cold side)
- Stability to  $\pm 0.02\text{ }^{\circ}\text{C}$

## Field dry-well calibrators

### 9103/9140 Field Dry-Well Calibrators

Great performance in portable instruments.

- Lightweight and very portable
- Accuracy to  $\pm 0.25\text{ }^{\circ}\text{C}$
- RS-232 and Interface-it software included

## Portable calibration baths

### 6109A/7109A Portable Calibration Baths

Four times more calibration throughput and twice the accuracy of Micro-Baths and dry-block calibrators

- Calibrate up to four tri-clamp sanitary sensors at the same time
- Wide temperature ranges cover most process applications
  - 6109A:  $35\text{ }^{\circ}\text{C}$  to  $250\text{ }^{\circ}\text{C}$
  - 7109A:  $-25\text{ }^{\circ}\text{C}$  to  $140\text{ }^{\circ}\text{C}$
- Excellent display accuracy of  $\pm 0.1\text{ }^{\circ}\text{C}$  provides 4:1 test uncertainty ratio for critical applications
- Stainless steel casing withstands harsh sterilizing chemicals and is rust proof
- NVLAP-accredited calibration included standard

## Micro-Baths

### 6102/7102/7103 Micro-Bath Thermometer Calibrators

Portable and extremely stable.

- Small portable calibration baths
- Calibrates sensors of different size or shape
- Accuracy  $\pm 0.25\text{ }^{\circ}\text{C}$

## Handheld calibrators

### 9100S/9102S Handheld Dry-Wells

Small, light, and portable dry-wells.

- Ranges from  $-10\text{ }^{\circ}\text{C}$  to  $375\text{ }^{\circ}\text{C}$
- Accuracy to  $\pm 0.25\text{ }^{\circ}\text{C}$ , stability of  $\pm 0.05\text{ }^{\circ}\text{C}$  at  $0\text{ }^{\circ}\text{C}$

### 9009 Industrial Dual-Block Thermometer Calibrator

Double your productivity or cut your calibration time in half.

- Temperatures from  $-15\text{ }^{\circ}\text{C}$  to  $350\text{ }^{\circ}\text{C}$  in one unit
- Two wells in each block for simultaneous comparison calibrations
- Rugged, lightweight, water-resistant enclosure



4180/81

## Infrared calibrators

### 4180/81 Precision Infrared Calibrators

Accredited performance for point-and-shoot calibrations.

- Calibrated radiometrically for meaningful, consistent results
- Accredited calibration included
- Accurate, reliable performance from -15 °C to 500 °C

### 9132 and 9133 Portable Infrared Calibrators

Precision when you need it for infrared temperature calibration.

- Certify IR pyrometers from -30 °C to 500 °C (-22 °F to 932 °F)
- Large 57 mm (2.25 in) black-body target
- RTD reference well for contact temperature measurement

## Zero-point dry-well

### 9101 Series Metrology Well Calibrators

Ice-point reference without the ice.

- ± 0.005 °C stability in a portable ice-point reference
- Easy re-calibration for long-term reliability
- Ready light frees user's time and attention



9132 and 9133

## Surface probe calibrator

### 3125 Surface Probe Calibrator

Milled aluminum for a smooth and true calibration work area with maximum thermal conductivity.

- Calibrates surface sensors up to 400 °C
- Uses Fluke Calibration 2200 Controller for excellent accuracy and stability
- NIST-traceable calibration included

## Thermocouple furnaces

### 9150 Thermocouple Furnace

Convenient, portable thermocouple furnace.

- 150 °C to 1200 °C
- Stability of ± 0.5 °C over full range
- NIST-traceable calibration included
- RS-232 port standard

### 9118A Thermocouple Calibration Furnace

High performance furnace for thermocouple calibrations to 1200 °C. The Fluke Calibration 9118A Thermocouple Calibration Furnace is a horizontal, open-ended tube furnace with a temperature range of 300 °C to 1200 °C.

- Wide temperature range
- Calibrates many thermocouple types
- Best-in-class temperature stability and uniformity
- Automated setpoint control



9150



9101



3125



9118A



## Humidity calibration

Humidity affects many properties of air and the materials that are exposed to it. Monitoring and measuring humidity is important wherever there is a need to prevent condensation, corrosion, mold, warping or spoilage of products. For example, it's important to measure humidity in industries that manufacture and distribute foods, pharmaceuticals, chemicals, fuels, wood, textiles, and paper.

The sensors that measure humidity need to be calibrated regularly to ensure they continue to operate within their specifications. Humidity sensor calibration is typically done using an instrument called a humidity generator.

Most humidity generators are based on one of two designs. A mixed-flow generator controls humidity by using the split-stream method. In this method, dry gas is drawn into the generator and divided

into two parts. One part is partially or completely saturated with water vapor; the other part is mixed in until the targeted humidity output is reached. The humidity depends on the wet air's humidity and the mixing ratio. A high-volume fan in the test chamber keeps the temperature and humidity uniform.

A two-pressure generator has two chambers. The first, called the saturator, contains air saturated with water vapor at a high pressure. The air passes from the saturator to the second chamber, called the test chamber. The test chamber is at a lower pressure. As the air passing into the test chamber reduces in pressure, its relative humidity also drops.

A mixed-flow generator is faster than a typical two-pressure generator, and is also more portable, which makes this type of calibrator a good solution for work in the lab or on-site in the field.

## Product highlights



### 5128A RHapid-Cal Humidity Generator

#### **Fast, portable humidity probe and logger calibration with accredited 1 % RH system accuracy**

- Best-in-class system accuracy for dependable humidity probe calibration
- Rapid humidity and temperature stabilization time for high calibration throughput
- Supports on-site, multi-point calibration of humidity probes
- Versatile design accommodates a large workload
- Compact size and lightweight for easy transport
- ISO 17025 accredited system calibration included standard
- Easy to maintain.



## Pressure calibration

Pressure calibration is the comparison of the output of a device used to measure pressure with that of another pressure measurement device, or pressure measurement standard. This usually involves plumbing the unit under test (UUT) to the standard device and generating a common pressure in the measurement circuit. The outputs of the devices are compared at one or more pressures, typically from the lowest to highest readings of the UUT's full scale range, or the range over which it is normally used.

The comparison process can be performed in a chain from the highest level of fundamental pressure realization down to everyday pressure measurement devices, such as analog gauges, transducers and transmitters, to ensure that pressure measurements are accurate and comply with accepted or mandated standards.

The test fluid inside a pressure calibration system may be liquid or gas depending on the application. In general, gas (usually compressed nitrogen or air) is used for cleanliness and precision at lower pressures, and liquids (usually oil or water) are often used for safety, leak integrity, and ease of pressure generation at higher pressures above 7 MPa to 40 MPa (1,000 psi to 6,000 psi). There is a great deal of overlap in the actual ranges for which liquid or gas may be used practically, as reflected in the range of Fluke Calibration instruments that are specialized for each type of test fluid.

## Product highlights



**8270A/8370A Modular Pressure Controllers/Calibrators**

**Widest workload coverage in an automated high-pressure controller**

The 8270A and 8370A are automated pneumatic pressure controllers that calibrate a wide workload of pressure sensors, covering twice the pressure ranges at twice the speed of other high-pressure controllers. Two models let you balance price and performance:

- The 8270A measures and controls pressures from vacuum to 44 MPa (6400 psi). It can be configured with ranges as low as 100 kPa (15 psi).
- The 8370A measures and controls pressures from atmosphere to 107 MPa (15,500 psi). It can be configured with ranges as low as 700 kPa (100 psi).

Fluke Calibration's unique control technology enables you to use these calibrators at low or high pressures, all in the same instrument. Control precision is 0.002 % of active range. Expand workload coverage to both gas and liquid filled devices by using the optional Contamination Prevention System (CPS).



**6270A Modular Pressure Controller/Calibrator**

**Calibrate a wide range of pressure gauges and sensors with a single instrument**

- Modular configuration makes this a versatile and expandable solution
- Easy to operate and maintain
- Wide measurement range—vacuum to 3000 psi (20 MPa)
- Three levels of accuracy—0.02 % FS, 0.01 % reading from 50 % to 100 % span, or 0.01 % reading from 30 % to 100 % span.—let you balance performance and budget
- High speed, stable pressure control
- Localized graphical user interface in choice of ten languages
- Can be fully automated with COMPASS® for Pressure software
- Optional contamination prevention system keeps valves clean and free from debris



**2271A Industrial Pressure Calibrator**

**The complete pneumatic pressure calibrator that grows along with your workload for wide workload coverage now and in the future**

The 2271A Industrial Pressure Calibrator provides a complete, automated solution for calibrating a wide variety of pressure gauges and sensors. Thanks to its modular design, it can be configured to meet different needs and budgets, and expanded to cover a broad workload.

- Calibrate a wide range of gauges and sensors with a single instrument
- Wide measurement range from -100 kPa to 20 MPa (-15 psi to 3,000 psi)
- Removable pressure measurement modules make it easy to change or add measurement ranges
- Integrated electrical measurement module provides a complete solution for calibrating pressure transmitters
- Built-in dual test ports enable you to connect multiple units under test (UUTs)
- 0.02 % FS pressure measurement uncertainty
- Localized graphical user interface in choice of ten languages

# Selection guide

## Gas Pressure Calibrators

This selection guide presents only some of the Fluke Calibration gas pressure calibration line. Other higher accuracy solutions are available for all pressure ranges.

	Manual									
	Deadweight testers									
	P3011	P3012	P3013	P3014	P3015	P3022	P3023	P3025	P3031	P3032
<b>Workload</b>										
Gauges/sensors										
Gage										
Bidirectional*										
<b>Pressure range</b>										
<b>Vacuum</b>										
90 % vacuum										
<b>Positive gage pressure</b>										
5 inH <sub>2</sub> O (1.5 kPa)										
12 inH <sub>2</sub> O (3 kPa)										
1.5 psi (10.3 kPa)										
2 psi (13.8 kPa)										
2.2 psi (15 kPa)										
3 psi (20.7 kPa)										
5 psi (34.4 kPa)										
10 psi (68.9 kPa)										
15 psi (103.4 kPa)										
20 psi (137.9 kPa)										
30 psi (200 kPa)										
40 psi (275.8 kPa)										
100 psi (.7 MPa)										
150 psi (1 MPa)										
200 psi (1.4 MPa)										
300 psi (2 MPa)										
500 psi (3.4 MPa)										
600 psi (4 MPa)										
1,000 psi (7 MPa)										
2,000 psi (14 MPa)										
<b>Accessories</b>										
Hand pump	○				○	○	○	○		
Fine Inc. Weights				○	○	○	○	○		

*Requires vacuum pump
○=Optional
0.0015 % FS
0.015 % reading uncertainty



# Selection guide

## Hydraulic Pressure Calibrators

This selection guide presents only some of the Fluke Calibration hydraulic pressure calibration line. Other higher accuracy solutions are available for all pressure ranges.

	Manual														Semi Automated												
	Deadweight Testers														EDWT Electronic Deadweight Tester												
	P3111	P3112	P3113	P3114	P3115	P3116	P3123	P3124	P3125	P3830	P3840	P3860	P3211	P3213	P3214	P3223	P3224	6531					6532				
																	7M	14M	20M	40M	70M	140M	200M	70M	140M	200M	
<b>Fluid type</b>																											
Oil																											
Water																											
<b>Workload</b>																											
Gauges/sensors*																											
Gage																											
<b>Pressure range</b>																											
10 psi (68.9 kPa)																											
15 psi (103.4 kPa)																											
20 psi (137.9 kPa)																											
30 psi (200 kPa)																											
40 psi (275.8 kPa)																											
100 psi (.7 MPa)																											
150 psi (1 MPa)																											
200 psi (1.4 MPa)																											
300 psi (2 MPa)																											
500 psi (3.4 MPa)																											
600 psi (4 MPa)																											
1,000 psi (7 MPa)																											
2,000 psi (14 MPa)																											
3,000 psi (20 MPa)																											
5,000 psi (35 MPa)																											
6,000 psi (40 MPa)																											
10,000 psi (70 MPa)																											
16,000 psi (110 MPa)																											
20,000 psi (140 MPa)																											
30,000 psi (200 MPa)																											
40,000 psi (275.8 MPa)																											
60,000 psi (400 MPa)																											

0.015 % reading uncertainty
0.002 % full scale uncertainty
0.0015 % full scale uncertainty
0.0075 psi (0.05 kPa) uncertainty
0.0002 % span uncertainty



6270A

## Gas pressure controllers/calibrators

### 6270A Modular Pressure Controller/Calibrator

Calibrate a wide range of pressure gauges and sensors with a single instrument

- Modular configuration makes this a versatile and expandable solution
- Wide measurement range—vacuum to 3000 psi (20 MPa)
- Three levels of accuracy—0.02 % FS, 0.01 % reading from 50 % to 100 % span, or 0.01 % reading from 30 % to 100 % span—let you balance performance and budget
- Can be fully automated with COMPASS™ for Pressure software
- Optional contamination prevention system keeps valves clean and free from debris

### 7252/7252i Dual Output Gas Pressure Controllers

A unique and flexible approach to performing automated calibrations over a wide pressure range.

- Two independent pressure measurement and control modules
- Two performance models available, 7252i and 7252
- Fast control: <15 seconds with zero overshoot
- Full scale ranges from 0 to 2.5 kPa and to 21 MPa (0 to 0.36 psi and to 3,000 psi)



7250LP

### 7250LP Low Pressure Controller/Calibrator

Specialized measurement and control for very low draft pressure range.

- Precision: 0.005 % of reading
- Control stability: 0.004 % of each range
- Resolution to 0.0001 in H<sub>2</sub>O
- Full scale ranges from 0 to 10 in H<sub>2</sub>O (2.5 kPa) to 0 to 100 in H<sub>2</sub>O (25 kPa)

### PPC4 Gas Pressure Controller/Calibrator

Wide rangeability and flexibility in a single controller. Ranges and accuracy classes can be selected to best suit the application.

- Up to two internal Quartz Reference Pressure Transducers (Q-RPTs) from absolute (vacuum) to 14 MPa (2000 psi)
- Full-scale standard class Q-RPTs provide 0.015 % full scale of selected range measurement uncertainty
- Standard class Q-RPTs provide 0.01 % reading measurement uncertainty
- Premium class Q-RPTs provide 0.008 % reading measurement uncertainty
- 4 ppm control precision as low as 1 kPa (0.15 psi) with large turndown
- Can use RPM4 reference pressure monitors as integrated remote pressure references for additional Q-RPT ranges



7250/7250i

### 7250/7250i Gas Pressure Controllers/Calibrators

Combining advanced precision, stability, speed and affordability.

- Pressure ranges from 0 to 40 kPa and to 21 MPa (0 to 5 psi and to 3000 psi, 0 to 400 mbar and to 210 bar)
- Model 7250i provides precision of 0.005 % of reading
- Model 7250 provides 0.003 % of full scale precision
- Stability: 0.0075 % of reading per year
- Time to setpoint: 15 seconds with no overshoot

### 2271A Industrial Pressure Calibrator

The complete pneumatic pressure calibrator that grows along with your workload for wide workload coverage now and in the future.

- Calibrate a wide range of gauges and sensors with a single instrument
- Wide measurement range from -100 kPa to 20 MPa (-15 to 3,000 psi)
- Removable pressure measurement modules make it easy to change or add measurement ranges
- Integrated electrical measurement module provides a complete solution for calibrating pressure transmitters
- Built-in dual test ports enable you to connect multiple units under test (UUTs)
- Two levels of accuracy, 0.01 % reading or 0.02 % FS
- Localized graphical user interface in choice of ten languages



7252/7252i



PPC4

### 7250xi High Performance Gas Pressure Controllers/Calibrators

Unmatched precision and speed.

- Pressure ranges from 0 to 40 kPa and to 17 MPa (0 to 5 psi and to 2500 psi, 0 to 400 mbar and to 170 bar)
- Advanced precision of 0.005 % of reading from 5 % to 100 % of full scale
- Stability: 0.0075 % of reading per year
- Time to setpoint: 15 seconds with no overshoot



2271A

## High pressure controllers/calibrators

### 8270A/8370A Modular Pressure Controllers/Calibrators

Widest pressure calibration workload coverage with twice the speed of other high-pressure controllers

- 8270A covers a wide range of vacuum to 44 MPa (6300 psi). It can be configured with ranges as low as 100 kPa (15 psi).
- 8370A covers a wide range of atmosphere to 107 MPa (15000 psi). It can be configured with ranges as low as 700 kPa (100 psi).
- Three levels of accuracy, 0.02 % FS, 0.01 % reading from 50 % to 100 % of span or 0.01 % reading from 30 % to 100 % of span
- Can be fully automated with COMPASS for Pressure software
- Optional contamination prevention system keeps valves clean and free from debris

### 7615 Hydraulic Pressure Controller/Calibrator

Unique, high speed approach to high pressure calibration and testing.

- Ranges to 280 MPa (40 k psi)
- Measurement precision to 0.01 % of range
- Available in a variety of fluids, including water
- High speed pressure control

### PPCH Hydraulic Pressure Controller/Calibrator

Wide rangeability and flexibility with precise high pressure hydraulic control.

- Ranges to 200 MPa (30 k psi)
- One or two internal Q-RPTs with large range turndown
- High precision control over wide range
- Can use RPM4 reference pressure monitors as integrated remote pressure references for additional Q-RPT ranges

## Reference pressure indicators

### RPM4 Reference Pressure Monitor

Premium measurement performance in a compact and rugged instrument.

- One or two independent quartz reference pressure transducer modules (Q-RPTs) with individual self-defense systems (SDS™) to prevent over-pressure
- Infinite Ranging and AutoRange™
- Differential measurement mode (channel 1- channel 2)
- Dedicated version available for air data ranges units and features, RPM4-AD
- Can be used as integrated external reference pressure transducer for PPC pressure controller/calibrators

### 7050 Series Digital Pressure Indicators

Unmatched precision with long term stability.

- Pressure ranges from 0 to 10 in H<sub>2</sub>O and 0 to 1,500 psi (0 to 25 mbar and 0 to 100 bar)
- Model 7050i provides precision of 0.005 % of reading
- Model 7050 provides 0.003 % of full scale precision
- Active matrix color screen with enhanced navigation menus
- Model 7050LP provides precision of 0.005 % reading for very low draft pressure ranges



8270A/8370A



7615



PPCH



RPM4




7050



PG7601



PG7202

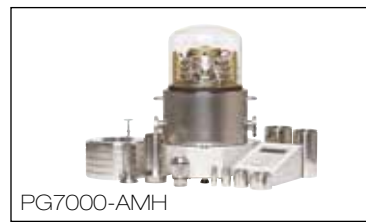

PG7000-AMH



PG7102



PG7302



2465A

## Piston gauges

### PG7601 Absolute Gas Piston Gauge

Gas piston gauge with vacuum reference for defining absolute pressures.

- Gas pressure from 5 kPa to 7 MPa (0.7 psi to 1,000 psi) gauge or absolute pressure
- Onboard measurement of test conditions, and real-time calculation and display of test pressure
- Compatible with PPC4 pressure controller and AMH-38 Automated Mass Handler

### PG7102 Gas Piston Gauge

Gas piston gauge with 55 kg mass set for extended range measurement of gauge pressures.

- Gas pressures from 100 kPa to 11 MPa (15 to 1,600 psig)
- Onboard measurement of test conditions, and real-time calculation and display of test pressure
- Compatible with PPC4 pressure controller and AMH-100 Automated Mass Handler

### PG7202 High Pressure Gas Piston Gauge

Gas piston gauge with oil-lubricated piston-cylinder for operation in high pressure gas or oil.

- Gas pressures from 100 kPa to 110 MPa (15 to 16,000 psig), oil pressures from 100 kPa to 200 MPa (15 to 30,000 psig)
- Gas operated, liquid lubricated for robust operation and low piston sink rates
- Onboard measurement of test conditions, and real-time calculation and display of test pressure
- Compatible with 8370A pressure controller and AMH-100 Automated Mass Handler

### PG7302 Piston Gauge

Oil piston gauge for measurement of high gauge pressures.

- Oil pressures from 100 kPa to 500 MPa (15 psi to 75,000 psig)
- Onboard measurement of test conditions, and real-time calculation and display of test pressure
- Compatible with PPCH pressure controller and AMH-100 Automated Mass Handler

### PG7000-AMH Automated Mass Handler

Automated Mass Handler for PG7000 Piston Gauges.

- Add to PG7000 Series piston gauge to fully automate pressure testing in gauge or absolute mode
- Designed and tested to provide years of reliable, maintenance free operation
- Reduce wear and possible mass value changes caused by manual mass handling

### 2465A Absolute Gas Piston Gauge

Gas piston gauge capable of very low pressures, for defining gauge and absolute pressures.

- Gas pressure from 1.5 kPa to 7 MPa (0.2 psi to 1000 psi) gauge or absolute pressure
- Lightweight, compact system with small masses for reduced bench space, transportability and ergonomic mass handling
- Compatible with WinPrompt and COMPASS software




PG9607/ PG9602



3990



GPC1

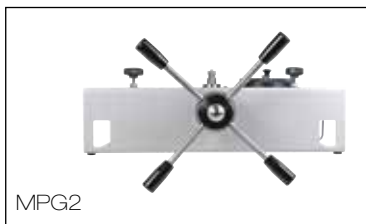

MPG2



OPG1



700HPPK

## National Metrology Institute piston gauges

### PG9607 Gas Piston Gauge

Fully automated primary pressure reference for absolute and gauge pressures to 500 kPa.

- Gauge and absolute pressures from 11 kPa to 500 kPa with a single piston-cylinder
- Large diameter 50 mm piston-cylinder with improved geometry allows direct traceability to dimensional measurements with very low uncertainties

### PG9602 Gas Piston Gauge

Fully automated primary pressure reference for absolute and gauge pressures to 11 MPa.

- Gauge and absolute pressures from 10 kPa to 11 MPa
- Up to 100 kg mass load under vacuum bell jar for large turndown and overlap of piston-cylinder ranges

## Manual pressure generation and control

### 3990 Gas Pressure Control Pack

Precise, manual absolute and gauge pressure control for gas piston gauges and indicators.

- Models from vacuum to 7 MPa and 20 MPa (1,000 psi and 3,000 psi)
- Self-contained for intuitive, easy use

### GPC1 High Gas Pressure Controller

Precise, assisted manual control for high pressure gas piston gauges and indicators.

- Models to 70 MPa and 110 MPa (10 k psi and 16 k psi)
- Precise control to full pressure with simple, ergonomic push-button operation

### MPG2 Hydraulic Pressure Generator/Controller

Precise, manual control for hydraulic piston gauges and indicators.

- Models to 100 MPa and 200 MPa (15 k psi and 30 k psi)
- Self-contained for intuitive and easy generation and precise control to full pressure

### OPG1 Hydraulic Pressure Generator/Controller

Precise, assisted manual control for hydraulic piston gauges and indicators.

- Pressure to 200 MPa (30 k psi)
- Precise generation and control to full pressure with simple, ergonomic push-button

### 700HPPK Pneumatic Test Pump Kit

Generate 21 MPa (3,000 psi) easily in the field, without liquid contamination or the hazard of a pressurized gas cylinder

- Generate and adjust pneumatic pressures up to 21 MPa (3,000 psi)
- Rugged, portable and stable enough to go anywhere—on any surface
- Reaches pressure in 20 seconds to full scale into a 30 cm<sup>3</sup> volume
- Detachable pressure adjustment system for adjusting pressure, connecting reference and test devices on bench and in the field, and isolating and venting pressure



P3000

## Industrial deadweight testers



P3100



P3200



P3800



P5510



P5513



P5514



P5515

### P3000 Pneumatic Deadweight Tester

High performance gas deadweight testers, with unique suspended piston design for vacuum calibration.

- 0.015 % of reading accuracy standard (0.008 % optional)
- 3 to 500 psi (0.2 to 35 bar) pressure
- Optional low range 0.03 to 1 bar vacuum (1 to 30 inHg)
- Integrated vacuum and pressure pump available to 2 MPa (300 psi)

### P3100 Hydraulic Deadweight Tester

Highly accurate oil deadweight tester, with quick and easy-to-use single and dual piston deadweight models.

- Pressure ranges to 140 MPa (20 k psi, 1400 bar)
- 0.015 % of reading accuracy standard (0.008 % optional)
- Built-in pressure generation and adjustment
- Single or dual piston formats

### P3200 Hydraulic Deadweight Tester

Hydraulic deadweight tester specially designed to use water as a test medium.

- Pressure ranges to 70 MPa (10 k psi, 700 bar)
- 0.015 % of reading accuracy standard (0.008 % optional)
- Built-in pressure generation and adjustment is standard
- Single or dual piston formats
- Water media

### P3800 Hydraulic Deadweight Tester

High performance and simplicity for very high pressure hydraulic calibration.

- Pressure ranges to 400 MPa (60 k psi, 4,000 bar)
- 0.02 % of reading accuracy standard (0.015 % optional)
- Includes hand pump and intensifier for generating and adjusting high pressures

## Pressure comparators

### P5510 Pneumatic Pressure Comparator\*

Precise, cost effective solution for checking pressure measuring instruments to 300 psi (20 bar).

- Dual pressure/vacuum capability
- Pressure to 21 MPa (300 psi, 20 bar)
- Vacuum from 0 to 80 kPa (0 to 24 inHg, 800 mbar)
- Built-in pressure and vacuum generation

### P5513 Pneumatic Pressure Comparator\*

Precise, cost effective solution for checking pressure measuring instruments to 3,000 psi (210 bar).

- Pressure range 0 to 21 MPa (3 k psi, 210 bar)
- High pressure pneumatic operation
- Screw press for fine pressure adjustments
- High quality needle valves for fine control

### P5514 and P5515 Series Hydraulic Pressure Comparators\*

Quick and easy solutions for checking pressure measuring instruments to 10,000 psi (700 bar).

- Compatible with a wide range of fluids
- P5514 Test Pump generates pressures to 70 MPa (10 k psi, 700 bar)
- P5515 Test Pump generates pressures to 140 MPa (20 k psi, 1,400 bar)
- P5515 has a built-in hand pump for system priming and large volume applications



P5514 with 2700G

\* Can be used with the 2700G Reference Pressure Gauge to provide a complete calibration solution

## Pressure calibrators

### 4322 Automated Pressure Calibrator

- Rugged, lightweight, compact components for use on the bench or in-situ
- Precise automated pressure control from vacuum to 70 MPa gauge (10,000 psi)
- Greater of 0.1 % of reading or 25 Pa (0.004 psi, 0.1 in H<sub>2</sub>O) accuracy across the entire pressure range
- Onboard pressure/vacuum generation from 3.5 kPa (0.5 psi) absolute to 2 MPa (300 psi)

### 3130 Portable Pressure Calibrator

Everything you need to generate, control and measure pressure, as well as read the output of the unit under test (UUT).

- Measure and generate pressures from vacuum to 2 MPa (300 psi, 20 bar)
- Internal pump can generate vacuum to -80 kPa (-12 psi, -0.8 bar) or pressure to 2 MPa (300 psi, 20 bar)
- Supply pressure connection allowing the use of external gas supply up to 2 MPa (300 psi, 20 bar)
- Includes variable volume for fine adjustment of pressures
- Pressure measurement accuracy of 0.025 % reading  $\pm$  0.01 % FS
- Electrical measurement and 24 volt supply for close looped calibrations
- Measure or generate 4 mA to 20 mA
- Measure 0 to 30 V dc
- Powered by internal, rechargeable, high capacity NiMH battery or universal ac mains adapter
- Compatible with Fluke 700P Pressure Modules

### E-DWT-H Electronic Deadweight Tester

A digital alternative to the traditional deadweight tester.

- Set and measure pressure precisely without limitation of mass loading resolution
- Pressure measurement is insensitive to local gravity and orientation
- One year uncertainty of  $\pm$  0.02 % of reading
- Run onboard test routines and store calibration data for review and export to a PC

### 2700G Series Reference Pressure Gauges

Best-in-class measurement performance in a rugged, easy-to-use, economical package.

- Precision pressure measurement from 100 kPa (15 psi) to 70 MPa (10,000 psi)
- Accuracy to 0.02 % of full scale
- Easy-to-use, rugged construction for reliable performance
- Combine with the 700PTPK or 700HTPK pump kits for a complete portable pressure testing solution for up to 4 MPa (600 psi) with the PTP-1 pneumatic pump and up to 70 MPa (10,000 psi) with the HTP-2 hydraulic pump
- Combine with the P5510, P5513, P5514, or P5515 Pressure Comparators for a complete bench top pressure calibration solution
- Test port is 1/4 NPT Male. 1/4 BSP and M20 X 1.5 adapters are included standard
- USB communications cable and universal power supply included standard



4322



3130



E-DWT-H



2700G



7750i

## Air data calibration

### 7750i Air Data Calibrator

Air data test set with unequalled precision and long term stability and superior pressure control technology.

- High accuracy, RVSM compliant
- Accuracy to  $\pm 2$  feet, 0.02 knots
- True differential sensor for airspeed (Qc)



RPM4-AD

### RPM4-AD Reference Pressure Monitor

Specialized pressure indicator for the absolute and differential pressure ranges in air data instruments.

- Fixed wing and rotary wing range versions
- True Pt, Ps, Qc operation



2468A

### 2468A Pitot/Static Primary Standard

Gas piston gauge specialized for air data absolute and differential pressure ranges.

- Pressure range: 0.4 inHg to 103 inHg
- Optional range: 3.4 inHg to 400 inHg
- Accuracy to  $\pm 0.5$  feet, 0.003 knots
- Extended mass set covers entire air data range without the need to change pistons
- Compatible with WinPrompt and COMPASS software



7250sys

## Pressure calibration systems

### 7250sys Multi-Range Pressure Calibration System

Turn-key automated gas pressure calibration system.

- Gas pressure measurement and control from low absolute to 17 MPa (2500 psi)
- Fully integrated multi-range pressure test and calibration systems with a single interface and single test port
- Select either an 8 range or the 12 range system for maximum performance and coverage

### Custom Pressure Calibration Systems

Engineered custom systems integrate standard Fluke Calibration products into a complete system based on the user's specific requirements. These are often multi-range systems that include pressure generation and supply accessories, data acquisition hardware and software and/or test instrument connection manifolds. Custom systems include but are not limited to turn-key pressure calibration rack systems, portable calibration carts and automated pressure calibration bench systems.





## Gas flow calibration

### What is gas flow calibration?

Gas flow calibration refers to the calibration of a flow sensing device such as a flow meter or flow controller by comparing its measurement against a flow measurement reference. Typically, the device, or unit under test (UUT), is pneumatically connected in series with the flow reference so they measure the same gas flow; then the indications of the two devices are compared.

### molbloc™/molbox™ system components

Fluke Calibration's molbloc/molbox gas flow calibration system consists of molbloc flow elements that connect to a flow terminal (either molbox1+ or molbox RFM) so the terminal can use pressure and temperature measurements from around the flow element, combined with gas properties and prior molbloc calibration data, to determine and display the gas flow rate.

### Mass flow vs. volume flow

A frequent topic of discussion and confusion surrounding gas flow measurement is that of mass flow versus volume flow. Flow meters and flow units used for flow measurements are used to measure and express either the amount of volume of gas or the amount of mass (number of moles or molecules) passing through the device. When performing a gas flow calibration, it is nearly always beneficial to use a mass flow reference measurement, because the mass flow rate stays constant throughout a flow system in steady state. Since gas is compressible, the volume flow rate varies at different locations in a flow system due to changes in density caused by changing temperature and pressure. Fluke Calibration molblobs are mass flow standards, which allow reliable comparisons to other flow devices. The molbox terminal is also able to calculate and express the flow rate in terms of volume flow at another point in the system to allow testing of volume-based devices.



molbox1+




molboc-L




molboc-S



molbox RFM

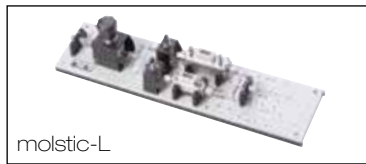

molstic-L

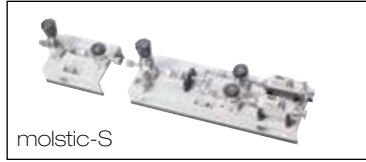

molstic-S



MFC-CB™



MFC Switchbox

## Gas flow standards

### molbox1+ Flow Terminal

0.125 % of reading—lowest uncertainty for gas flow calibration.

- Allows coverage of flow range from less than 1 sccm to over 5000 slm with a single user interface and transportable system
- Real-time flow measurements makes adjusting analog flow devices fast and easy
- Perform fully-automated flow calibrations using molbox terminal with COMPASS for Flow software
- Updated design

### molboc-L Laminar Flow Element

Laminar flow elements for flow from 1 sccm to 100 slm.

- Traceable to primary gravimetric mass flow measurements
- Multiple gases supported
- Useable with existing molbox1+ and molbox RFM mass flow terminals and COMPASS software
- Integrated filter to protect against contamination
- Integral gas temperature conditioning and measurement
- No moving parts that cause pressure/flow fluctuations or threaten reliability

### molboc-S Sonic Nozzle Flow Element

Sonic nozzle based molblocs for gas flow up to 5,000 slm.

- Covers ranges up to 5,000 slm in N<sub>2</sub> and air
- Multiple gases supported
- Useable with molbox1+, or existing molbox1 and molbox RFM mass flow terminals and COMPASS software
- Proven critical flow venturi (sonic) nozzle operating principle traceable to primary gravimetric flow measurements

### molbox RFM Reference Flow Monitor

Compact terminal for making mass flow measurements using molboc-L and molboc-S flow elements.

- Economical alternative to molbox1+ terminal
- ± 0.5 % of reading uncertainty
- Covers the flow range of 1 sccm to 100 slm with molboc-L, and up to 5,000 slm with molboc-S
- 5141/5142/5144 kits feature molbox RFM, molboc-L and other hardware for a complete calibration system
- No moving parts that cause pressure/flow fluctuations or threaten reliability

### molstic Mounting Systems

Used to conveniently mount and protect molboc elements, connect to units under test and provide flow and pressure control.

### molstic-L used for molboc-L mass flow elements.

- Quick connector input
- 2 micron (0.5 micron for low flow) filter to protect the downstream components
- Adjustable regulator protects the molbox transducers

### molstic-S used for molboc-S mass flow elements.

- Available in 1/2 inch or 1/4 inch system plumbing sizes
- Integrated flow shut-off/metering valves

### Gas Flow Automation Accessories

#### MFC-CB™ Control Box

Stand-alone unit for setting/reading analog mass flow controllers (MFCs) and mass flow meters (MFMs).

- Set and read 0 to 5 V or 4 to 20 mA on two (2) channels
- Complete front panel local control and remote operation via RS-232 and IEEE-488 interfaces

#### MFC Switchbox™

Supplies power and switches between up to five MFCs or MFMs on one molbox1+ or MFC-CB channel.

- Duplicates MFC channel without switching cables



## Calibration software

Calibration software automates all or part of a calibration process via computer control. Calibration software also allows users to manage their calibration and asset data.

If you've heard about the benefits of automated calibration and asset management but are puzzled about how everything fits together, call on Fluke Calibration for solutions.

Other types of calibration software from Fluke Calibration include data-logging software, software that generates calibration constants and references, and various add-on and plug-in software programs.

### Why use calibration software?

Using software to automate all or part of the calibration process offers several important advantages.

**Consistency**—Software automation ensures that calibrations can be performed exactly the same way by multiple operators in multiple locations. This improves the quality of results, reduces errors and standardizes methods.

**Efficiency**—Automating the calibration process allows technicians to set up tests and then go on to perform other tasks, making more efficient use of their time. Calibrations are typically completed much more quickly, saving time and money. If the software is capable of calibrating multiple units under test simultaneously, automation increases throughput as well.

**Documentation and reports**—Calibration automation software typically includes features for documenting calibration procedures, storing calibration data, and producing reports, allowing users to eliminate paper records or spreadsheets.

Because Fluke Calibration software does such a good job of keeping accurate records of all parts of the calibration process, it also supports compliance with a wide variety of quality standards.

## Product highlights



### **MET/TEAM™ Test Equipment Asset Management Software**

MET/TEAM software is a powerful, flexible, and scalable calibration management software solution for managing your calibration assets. Designed by metrologists for metrology, it is ideal for calibration professionals who need to manage workflow through the calibration laboratory.

- Browser-based software enables access that is convenient, yet secure
- Fully featured for tracking and managing assets
- Fully integrated with the Run Time function of industry leading MET/CAL software
- Replaces MET/TRACK as the recommended data- base engine for MET/CAL software
- Popular Microsoft SQL server database for reliable, affordable, non-proprietary data storage
- Workflow management
- Highly customizable fields and labels
- Shortcuts (quick links) for easy navigation
- Promotes quality processes to support accreditation
- Customizable reports with Crystal Reports Professional
- Automated email alerts and recall escalation
- Mobile module for on-site calibration
- Customer web portal to allow read-only access for remote customers
- Commerce module for quoting, billing, and contract pricing
- Designed for metrology by metrologists
- Backed by Fluke Calibration, expert in calibration instrumentation and software
- Collect and store manual calibration data



### **MET/CAL™ Calibration Management Software**

MET/CAL software automates the calibration process to help you manage your workload more efficiently and consistently. The MET/CAL suite of applications includes MET/CAL software, the industry leader for automated calibration; plus MET/TEAM software for asset management.


An updated Runtime interface offers better visibility into the calibration process. An updated Procedure Editor interface lets users view test results in a graphical user interface.

MET/CAL software provides you with the tools you need to:

- Perform automated calibration on all kinds of test and measurement tools and equipment, including dc/lf, RF and microwave instruments
- Create, edit, test, and document calibration procedures, quickly and easily
- Configure and report a wider range of measurement uncertainty parameters and include verification data to provide an audit trail and support further analysis
- Track asset information including calibration and maintenance history and status, traceability, users, customers, and location
- Analyze and report asset information; produce customized printed certificates and reports.
- Make data available to other corporate systems
- Import asset and calibration data into MET/CAL software
- Help meet the requirements of quality standards like ISO 9000, ISO/IEC 17025, NRC 10 CFR, ANSI Z540.3, and others



MET/CAL

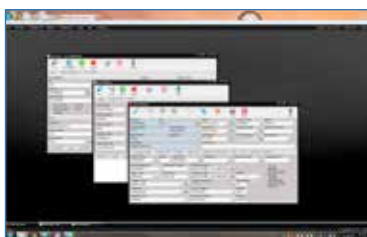

MET/TEAM



MET/SUPPORT

Asset ID	Asset Name	Asset Type	Manufacturer	Model	Serial No.	Cal Due	Cal Status
10000001	10000001	10000001	10000001	10000001	10000001	10000001	10000001
10000002	10000002	10000002	10000002	10000002	10000002	10000002	10000002
10000003	10000003	10000003	10000003	10000003	10000003	10000003	10000003
10000004	10000004	10000004	10000004	10000004	10000004	10000004	10000004
10000005	10000005	10000005	10000005	10000005	10000005	10000005	10000005

Warranted Procedures for MET/CAL

## Electrical/RF calibration software

### MET/CAL™

The complete solution for automating calibration processes plus managing and reporting measurement assets.

- Perform fast, repeatable, and powerful calibration
- Full storage of calibration data
- Rich reporting capabilities
- Configure and report a wider range of measurement uncertainty parameters

### Warranted Procedures for MET/CAL

Fully tested, ready-to-go procedures designed to satisfy your needs.

- Optional calibration procedures for MET/CAL Calibration Software
- Warranted by Fluke Calibration to produce valid calibrations on the intended unit under test (UUT) for the specified model and revision level
- These procedures automate the calibration process under MET/CAL control

## Calibration asset management software

### MET/TEAM Test Equipment Asset Management Software

Manage more workload with less work with MET/TEAM software.

- Browser-based calibration asset management software
- Fully integrated with MET/CAL Software
- Microsoft SQL Server database
- Highly customizable
- Email automation
- On-site calibration
- Work flow management
- Pricing/billing/invoicing
- Customer web portal
- Installation and training services

## Software support programs

### MET/SUPPORTSM Gold


Annual support programs for MET/CAL and MET/TEAM software. These premier support services help you maximize your software investment.

- Premium support and services to help you maximize productivity with MET/CAL and MET/TEAM software
- Access to warranted procedure library
- Prioritized technical support
- Software updates and upgrades
- Priority web content
- Discounts on a variety of services

### Software Training and Services

A range of services to help you maximize your investment in calibration software.

- MET/TEAM software installation and startup
- MET/TEAM data migration and import
- Classroom or onsite training classes:
  - MET/CAL procedure writing
  - Advanced procedure writing
  - MET/TEAM Asset Management
  - Crystal Reports Writing
- Custom MET/CAL procedures
- MET/TEAM self-validation
- Custom software services

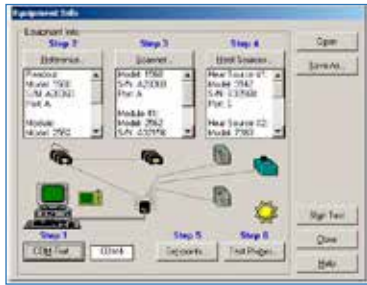

9938 MET/TEMP II Temperature Calibration Software v5

## Temperature calibration software

### 9938 MET/TEMP II Temperature Calibration Software v5


New version of the proven solution for automated temperature calibration

- Compatible with Windows 7 and 8 operating systems
- Adds support for 9190A Field Metrology Well and 9118A Thermocouple Furnace
- Calibrate PRTs, SPRTs, thermistors, thermocouples, and even liquid-in-glass (LIGs), bi-metallic thermometers, and connected sensors that can't be attached to a readout
- Supports multiple temperature sources and reference probes in the same test for faster calibration and extended test range

### TQSoft and TQAero Thermal Validation Software

For FDA 21 CFR Part 11 and AMS 2750 Compliant Data Collection

- Support for Fluke 2638A and 1586A, for enhanced data collection and reporting in regulated industries
- Easy menu system and toolbar
- Test equipment preparation and sensor calibration
- Data security, audit trail, and compliance reports

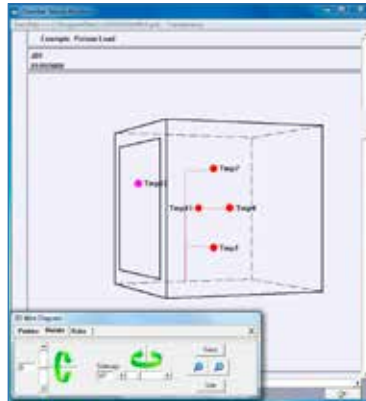

TQSoft and TQAero Thermal Validation Software

### LogWare

Turn a Fluke Calibration single-channel handheld or 1502A/1504 readout into a real-time data logger.

- Collects real-time data
- Calculates statistics and displays customizable graphs
- Allows user-selected start times, stop times and sample intervals

### LogWare II


Turn any Fluke Calibration multi-channel thermometer readout into a real-time data logger.

- Collects real-time data using Fluke Calibration multi-channel readouts
- Calculates statistics and displays customizable graphs
- Allows user-selected start times, stop times and sample intervals

### LogWare III

Remotely monitor and log a virtually unlimited number of concurrent log sessions into a central data repository.

- Up to two temperature and two humidity inputs for each DewK
- Customize your graph trace color, alarms, and statistics as you go

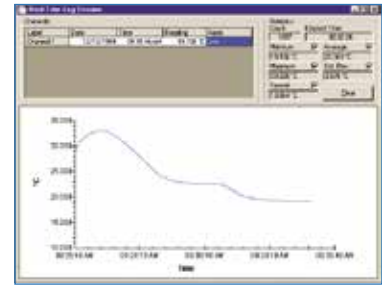

LogWare



LogWare II



LogWare III

Test No.	Test Description	Test Type	Test Value	Units	Low Limit	High Limit	Resolution	Units	Uncertainty
1	Control Test	Read Label							
2	Control Test	Check / Flush are OK							
3	Span Test	W-0							
4	Span Test	W-0	Reading Reference		1.25 and 2.47				
5	Span Test	Read Label							
6	Span Test	Read Label							
7	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
8	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
9	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
10	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
11	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
12	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
13	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
14	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
15	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
16	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
17	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
18	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
19	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%
20	Span Test	W-0	11.00	psi	10.50	11.50	0.01	0.10	0.10%

COMPASS for Pressure



COMPASS for Pressure

## Pressure/Flow calibration software

### COMPASS™ for Pressure


Universal platform for automating pressure calibration.

- Integrated piston gauge support
- Runs complete automated calibration sequences
- Supports multiple units under test
- Automates virtually any pressure standard or device under test


### COMPASS for Flow

Macro-enabled mass flow calibration software package.

- Fully customizable
- Supports non Fluke Calibration flow references
- Performs complex real time flow computations, and allows you to alter test scenarios based on data collected

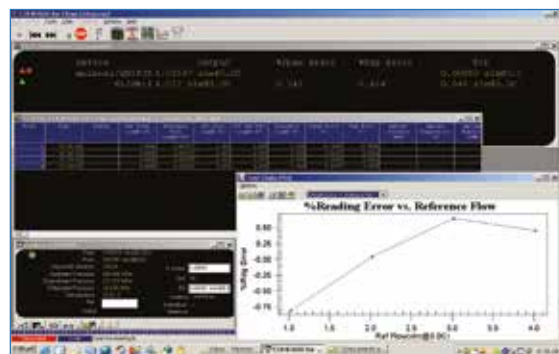

COMPASS for Flow



## Data acquisition and general purpose test equipment

### Data acquisition equipment

Get the data you want, where, how and when you want it. Fluke gives you a broad choice in data acquisition for process monitoring and laboratory test systems. You can choose a stationary or portable data logger. Transfer data to internal memory, to a removable memory card, or to your PC. Choose a standalone or distributed networked units. And you can expand your system from 20 to 1,000+ channels, depending on the series.

All Fluke data acquisition products feature unique, built-in universal signal conditioning and a plug-in Universal Input Module to enable you to measure virtually any type of signal without having to purchase extra equipment. Plus, powerful, easy-to-use Windows®-based software supports easy configuration, advanced trend analysis, professional-quality reporting, and enables you to quickly build human-machine-interfaces without any programming.

### General purpose test equipment

Fluke Calibration designs and manufactures bench instruments in a wide variety of product categories. Besides their use on the bench, these instruments have several characteristics in common as you will find below:

- Each bench instrument is accurate and provides precise information. They reflect the professionalism of the people who buy and use them.
- Each is reliable, dependable, and rugged.
- All are easy to operate. Many owners of Fluke bench instruments say that the controls are intuitive and help them work more efficiently.
- These bench instruments are compact and easily transported, but they are also multi-functional.
- You will find that these instruments are a good value, particularly when compared against other tools for their cost/function ratio.



## Product highlights




### 2638A Hydra Series III Data Acquisition System

#### A price performance breakthrough in standalone data acquisition system

The Fluke Hydra Series III continues the Hydra Series legacy in data acquisition. This new Hydra Series improves on the long standing, industry leading specification of best-in-class thermocouple accuracy. With basic dc measurement accuracy of 0.0024 %, 0.5 °C thermocouple accuracy, color trend display, easy-to-use menu system and world-class industrial safety ratings, the 2638A is a truly industrial grade, precision data acquisition system.

Expandable from 22 to 66 channels of analog differential measurement, the Hydra 2638A offers the flexibility of our Universal Input Connector, which allows quick connect and disconnect of any type of input to any channel. AC and dc voltage, resistance, thermocouple, RTD, thermistor, frequency and dc and ac current are all selectable inputs for the 2638A. If your measurement need is from under twenty channels to over sixty-six channels per unit or thousands of channels per system, we have you covered.

- DC accuracy of 0.0024 %
- Best-in-class thermocouple accuracy of 0.5 °C
- Up to 67 universal differential, isolated inputs
- On-screen color trend graphing
- Easy menu system for setup and data management
- Multi-channel real-time data display
- 6.5 digit DMM function selections
- Monitor function for real-time viewing and charting between scans
- 20 on-board separate math channels
- 45 channels/sec basic dc scan rate
- Internal 75,000 scan memory plus USB drive port
- Data security features
- CAT II 300 V input safety rated

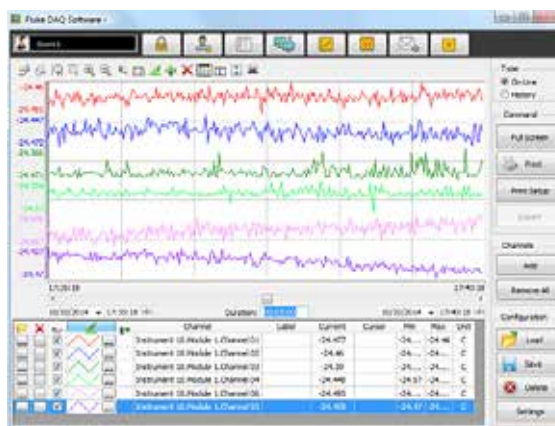

### Fluke DAQ 6.0 Application Software

#### A powerful and versatile application for quick and easy configuration, data logging and analysis using Fluke data acquisition products

Fluke DAQ is praised by users for its versatile handling of data acquisition and logging. Improved trending, file handling, added web interface, web control, convenient print functions for charts and graphs and multiple language improvements make Fluke DAQ version 6 a feature-rich application that you can trust with your important data and analysis needs.

#### Fluke DAQ features easy multi-unit configuration, data logging and analysis for any of these products:


- 2638A Hydra Series III Data Acquisition System/Digital Multimeter
- 1586A Super-DAQ Precision Temperature Scanner
- 2640A and 2645A NetDAQ® Networked Data Acquisition Units
- 2680 Series Data Acquisition Systems



2638A



2686A

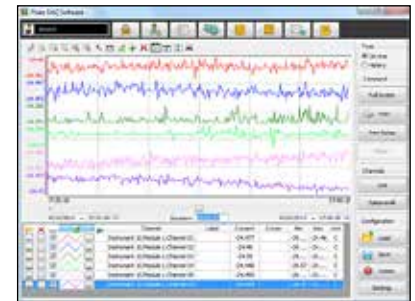

Fluke DAQ 6.0

## Data acquisition equipment

### 2638A Hydra Series III Data Acquisition System/DMM

A price performance breakthrough in standalone data acquisition system.

- DC accuracy of 0.0024 %
- Best-in-class thermocouple accuracy of 0.5 °C
- Up to 67 universal differential, isolated inputs
- On screen color trend graphing
- Easy menu system for setup and data management
- 6.5 digit DMM function selections
- Monitor function for real-time viewing and charting between scans
- 20 on-board separate math channels
- 45 channels/sec basic dc scan rate
- Internal 75,000 scan memory plus USB drive port
- Expands to thousands of channels with application software
- Data security features
- USB flash drive support for data transfer to PC
- CAT II 300 V input safety rated

### 2680 Series Data Acquisition Systems

Standalone or networked precision multi-channel data acquisition

- 20 to 120 universal analog inputs per chassis; systems to +2,000 channels
- Stand-alone data logger operation with the 2686A
- Large scalable LAN systems using the 2680A with 10BaseT/100BaseT
- Two types of Universal Input Modules: high-isolation precision modules or fast scan modules, with 16- to 18-bit resolution
- Throughput of more than 3,000 channels-per-second-per-chassis with 2680A-FAI modules
- Superior thermocouple measurement accuracy (J, K, R, S, T, N, I, U, C, B)
- 20 digital I/O and 8 form C, 1 Amp relay output modules for direct control of equipment
- Up to 300 V input isolation, 1600 V transient overvoltage protection (2680A-PAI)
- Universal input conditioning for any input, on any channel, in any combination (V dc, V ac, Ohms, frequency, RTD, thermocouple, thermistor or current)
- ATA flash memory card for stand-alone operation—from 16 MB to 1 GB (2686A only)
- Multiple power sources: 100 V to 240 V and 9 V to 45 V dc
- Includes Fluke DAQ Software: Controls all 2680 Series functions, provides real-time and historical and also communicates with NetDAQ and Hydra Series III products

### Fluke DAQ 6.0 Application Software

A powerful and versatile application for quick and easy configuration, data logging and analysis using Fluke data acquisition products.

- Easy multi-unit configuration for any mix of Fluke 2638A, 1586A, NetDAQ or 2680 Series
- Full screen trend charting of up to 32 channels with zoom, print and scaling functions
- Built-in OPC server software for sharing Fluke DAQ data with popular client programs
- Logon security features
- Auto start on power interrupt settings
- Master/slave configurations available
- Alarm logging with history with acknowledgement features
- Four web clients for remote viewing and control of systems using secure login
- Automated email of alarm alerts
- Up to 2000-channel capability
- Runs on a variety of operating systems including Windows 7 and 8



8845A/8846A



8808A



271



290



280

## General purpose test equipment

### 8845A/8846A Precision Multimeters

Precision and versatility for bench or systems applications.

- 6.5 digit resolution
- Basic V dc accuracy of up to 0.0024 %
- Dual display, showing two different measurements at once

### 8808A Digital Multimeter

Versatile multimeter for manufacturing, development and service applications.

- 5.5 digit resolution
- Basic V dc accuracy of 0.015 %
- Dual display, showing two different measurements at once
- Ultra low-burden current measurement mode

### 271 DDS Function Generator with ARB

High performance function generator.

- High stability 10 MHz DDS function generator
- Arbitrary capability with storage for five user-defined waveforms
- Multiple standard and complex waveforms recalled from internal memory
- Extensive modulation capabilities include sweep, AM, Gating, Trigger/Burst, FSK and Hop
- GPIB and RS-232 interfaces

### 290 Series Waveform Generators

One, two, or four-channel 100 MS/s waveform generators.

- 100 MS/s 12-bit arbitrary waveform capability
- 1 M point waveform memory
- 40 MHz function generator capabilities using DDS (50 MHz for square waves)
- 10 ns pulse pattern generator
- Waveform sequencing with up to 1,024 segments
- Unlimited waveform storage using CF® memory card
- Waveform Manager Plus for Windows software
- USB interface in addition to RS-232 and GPIB

### 280 Series Waveform Generators

Universal waveform generators offering superior performance and value.

- Choice of 1, 2 and 4 independent or linked channels
- 40 MS/s max. sampling speed
- 16 MHz function generator
- 10 MHz pulse generator
- Pulse train pattern generator
- Arbitrary waveforms of up to 65 k points
- Powerful modulation capabilities
- Built-in trigger generators
- Waveform Manager Plus for Windows® software
- Multiple standard waveforms recalled from internal memory
- RS-232 and GPIB interfaces



## Service programs



### Priority Gold Instrument CarePlan

An instrument CarePlan from Fluke Calibration that guarantees your calibrator is ready to work when you are.

When your calibrator is out of your lab for scheduled calibration or unexpected repair, it isn't working for you. What's worse, you may not know exactly when to expect it back in your lab. With the Fluke Calibration Priority Gold CarePlan, you can schedule your calibrations and reduce repair downtime effectively, because you will know exactly when to expect your calibrator back in your lab. Your Priority Gold CarePlan puts you in control of your downtime and in control of your business.

#### Priority Gold CarePlan features:

- Annual calibration included with guaranteed in-house turnaround of three or six business days
- Free repairs with guaranteed in-house repair time of ten business days (includes calibration)
- Prepaid, priority freight on return of instrument
- Free product updates for the product covered by the Priority Gold CarePlan
- Term: one, three, and five-year plans available
- 10 % off Priority Gold CarePlans with the purchase of a new Fluke Calibration instrument
- 10 % off on product upgrades for the product covered by the Priority Gold CarePlan
- 15 % off any out-of-plan service charges for the product covered by the Priority Gold CarePlan
- 20 % off any Fluke Calibration scheduled metrology training for any of your personnel

### Silver CarePlan

- Extended warranty for your Fluke Calibration instrument
- Repairs are always unexpected, and they can be costly. Control your cost of ownership with a Fluke Calibration Silver CarePlan. The Fluke Calibration Silver CarePlan is a comprehensive instrument warranty support plan that puts you in charge of your operating costs and protects your investment in your new Fluke Calibration instrument.

#### Silver CarePlan basic features:

- Extended warranty coverage for your instrument
- Calibration included on repairs covered by your plan
- 15 % discount on regular calibrations during your factory and Silver CarePlan term
- 15 % discount on any out-of-plan services
- Free product updates (PCNs) performed at the time of repair



**Register your Fluke Calibration product online**

Visit [us.flukecal.com/register-product](http://us.flukecal.com/register-product) to register your product today!

**Authorized Fluke Calibration Service Centers**

Fluke Calibration offers calibration and repair services and support through our flagship metrology laboratories and service partners worldwide. To find the best solution for your calibration product you can visit [us.flukecal.com/service-centers](http://us.flukecal.com/service-centers), call us at **877-355-3225**, or email us at [service@flukecal.com](mailto:service@flukecal.com).

**Training**

Calibration and metrology training from Fluke Calibration can help you and your staff become more knowledgeable in a wide variety of disciplines. Instructors are experts who work in electrical, temperature, pressure and flow calibration, and who really want to help you learn the foundation and techniques of metrology that you can put to immediate use in your workplace. Fluke Calibration offers introductory, intermediate, and advanced level courses in a variety of formats to meet your needs.

**Instructor-led classroom courses**

Our instructor-led courses cover a variety of metrology topics and range from two to five days in length. Held in various locations around the world, training from Fluke Calibration is a great way to maximize your investment in your calibration product.



**Instructor-led web-based training**

Our instructor-led web-based trainings offer the same great access to Fluke Calibration software experts, with the added benefit of not having to travel. Instructor-led web-based trainings are designed to fit into your schedule, without disrupting your workflow. Courses are set up in anywhere from one to five parts, two hours each, held on consecutive days.

**Self-paced online training**

Our self-paced calibration and metrology training courses were developed by technical experts in the metrology community using proven instructional design components. At the start of each module, a brief tutorial describes how the course is laid out. The learning objectives are clearly stated. Topics are selected from easy-to-navigate menus and sub-menus. Embedded questions are presented frequently to increase retention. Engaging graphics, photos, formulas and tables support text material. A final post-test provides proof of competency. Tests are shuffled after each use. Most importantly, a certificate of completion satisfies documentation requirements.

**Self-paced training tools**

In addition to self-paced online training, Fluke Calibration offers additional self-paced training tools for dc/low frequency metrology. Fluke Calibration offers the only comprehensive text book on dc/low frequency metrology, *Calibration: Philosophy in Practice, Second Edition*. It covers real world concepts and applications, and is designed and written for the working technician.



**On-site training**

Fluke Calibration instructor-led courses may also be taught at your facility. If you have a large number of students, or if the material you wish to discuss is considered confidential, you may find On-Site Training an attractive alternative. Contact your local Fluke Calibration representative to discuss specific requirements and arrangements, or email [training@flukecal.com](mailto:training@flukecal.com) for a Fluke Calibration representative to contact you.

For up-to-date course schedules, pricing and training resources visit: [us.flukecal.com/training](http://us.flukecal.com/training)

**Installation and training supplemental services**

Fluke Calibration offers expert consulting to help you configure and use your calibration products as productively and cost-effectively as possible. We can help:

- Minimize downtime
- Make sure your equipment runs efficiently
- Confirm that systems are operating properly
- Train you and your staff at your site with your newly acquired Fluke equipment.





**Fluke Calibration.** *Precision, performance, confidence.™*

Electrical

RF

Temperature

Humidity

Pressure

Flow

Software

**Fluke Calibration**

PO Box 9090, Everett, WA 98206 U.S.A.

**Fluke Europe B.V.**

PO Box 1186, 5602 BD

Eindhoven, The Netherlands

Web access: <http://www.flukecal.eu>**For more information call:**

In the U.S.A. (877) 355-3225 or

Fax (425) 446-5716

In Europe/M-East/Africa +31 (0) 40 2675 200 or

Fax +31 (0) 40 2675 222

In Canada (800)-36-FLUKE or

Fax (905) 890-6866

From other countries +1 (425) 446-6110 or

Fax +1 (425) 446-5716

Web access: <http://www.flukecal.com>

Modification of this document is not  
permitted without written permission  
from Fluke Calibration.

©2011-2016, 2019 Fluke Calibration.  
Specifications subject to change without notice.  
Printed in U.S.A. 3/2019 4026225i-en