

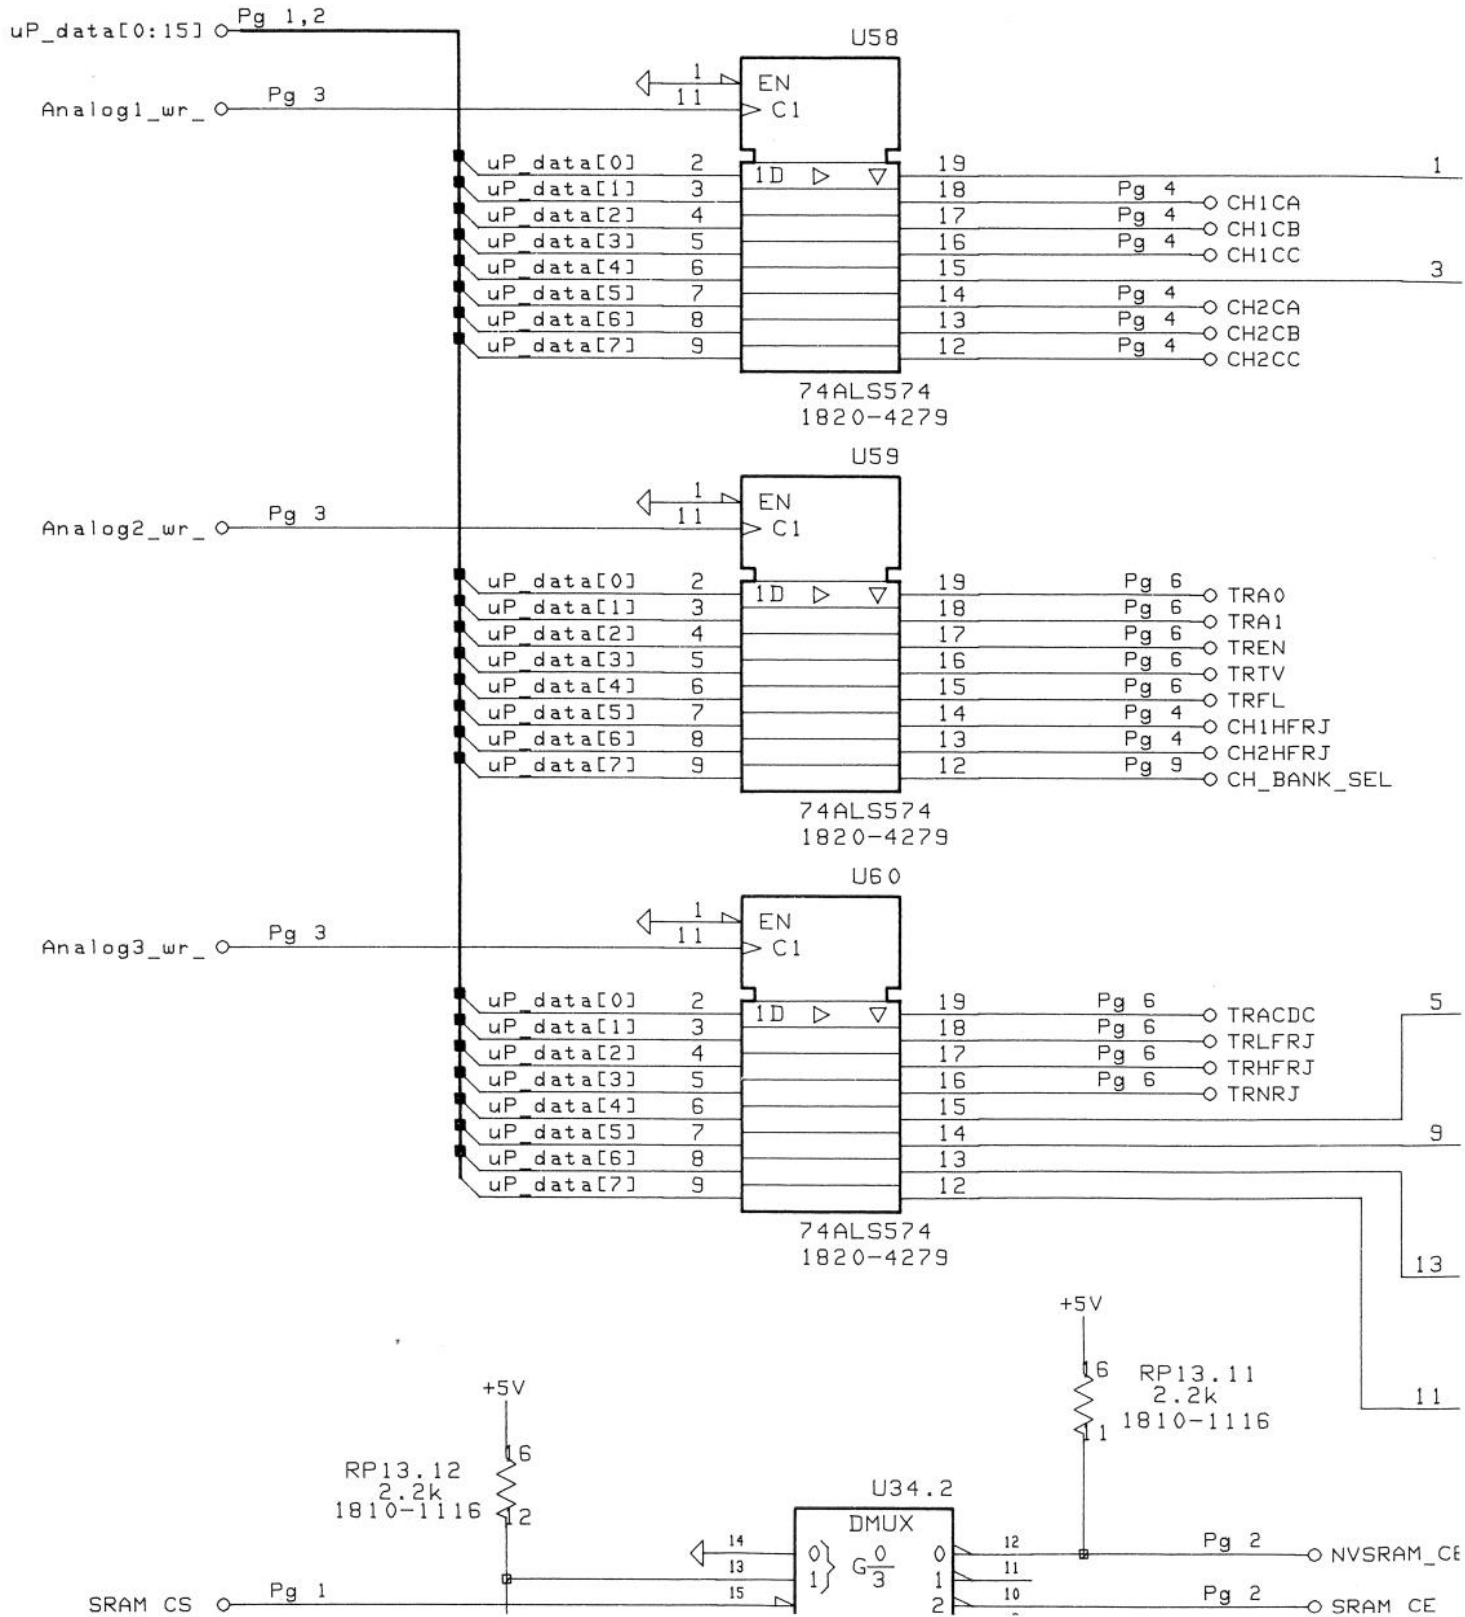
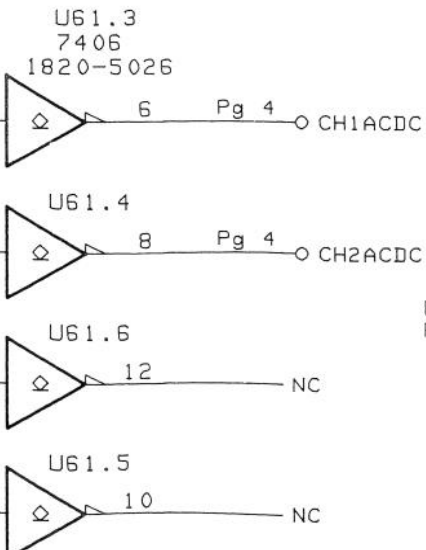
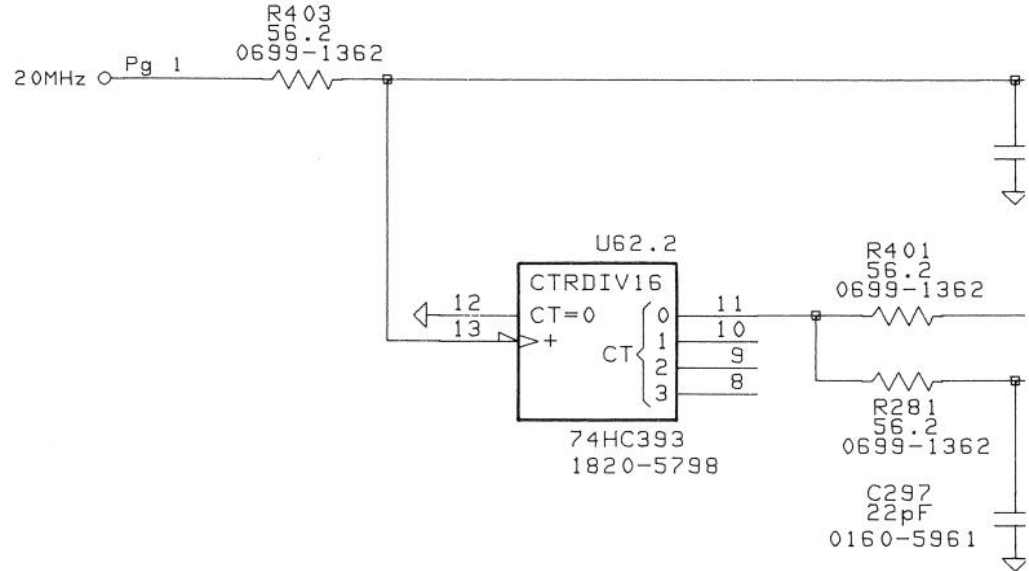



sheet 3 of 11
 Page 1 upper

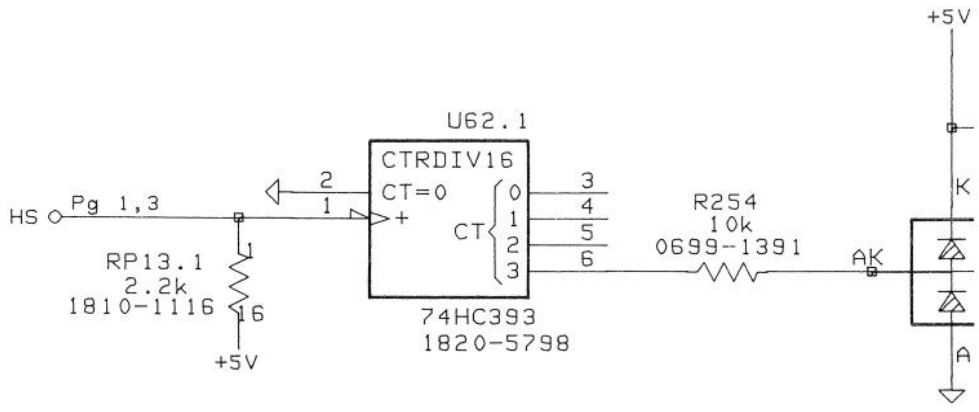

sheet 3 of 11
page 2 upper

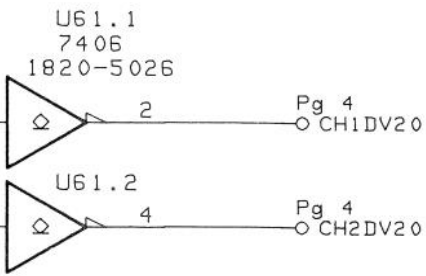

PULLUPS ARE ON RECEIVING END

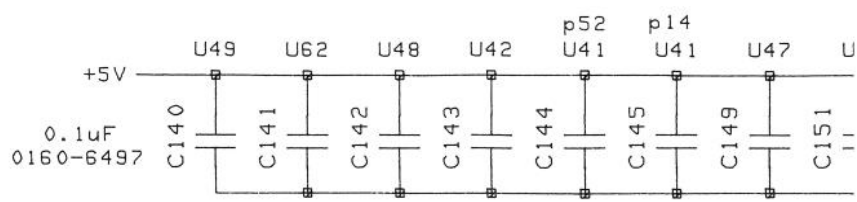







BIG Chip Bypass Caps
(with IC numbers)

16	17		19		21
45	48	81	83	D2	

sheet 3 of 4
page 3 upper

C 206
01uF 0160-6736


R256 is a 1/4 Watt Carbon Core thru hole Resistor

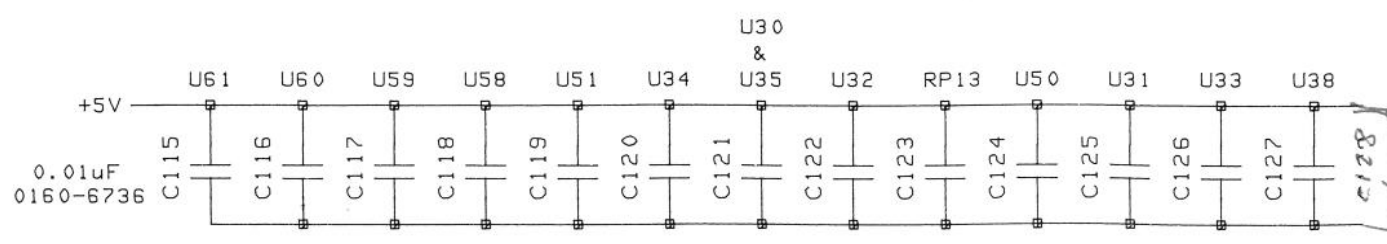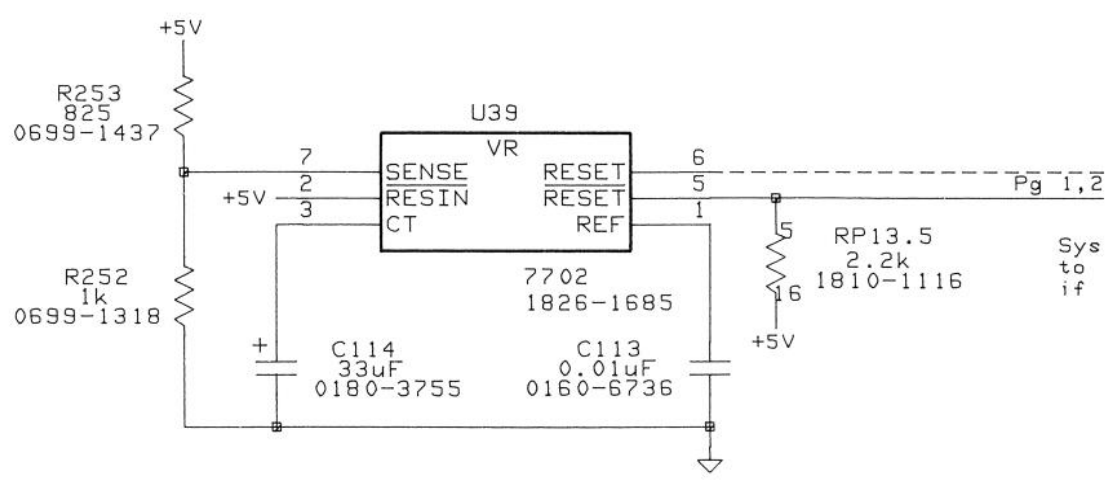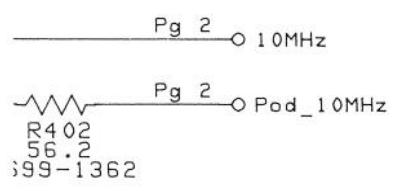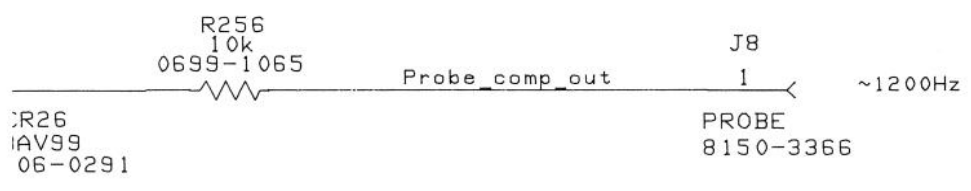


Little Chip Bypass Caps
(with IC numbers)


1		11	12	14	15				
29	30	32	33	38	43	SYM	REVISIONS	APPROVED	DATE
						A	AS ISSUED	JS	

sheet 3 of 11
page 4 upper



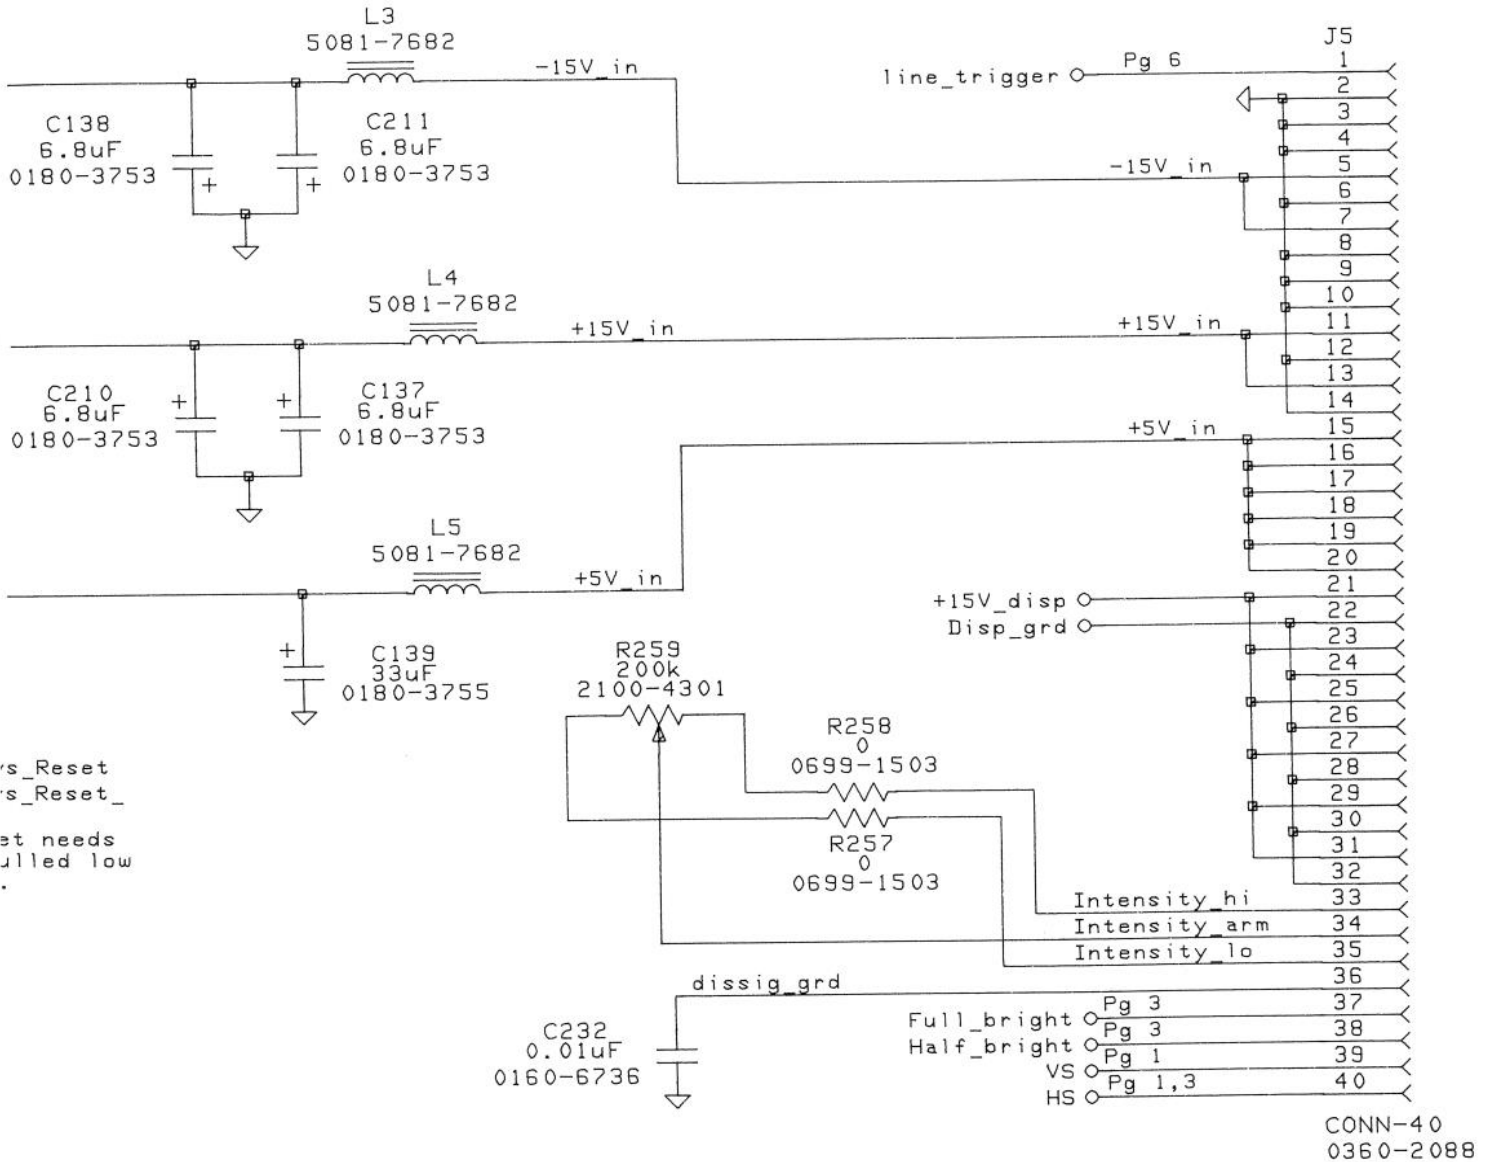


's_Reset
's_Reset_
at needs
ulled low







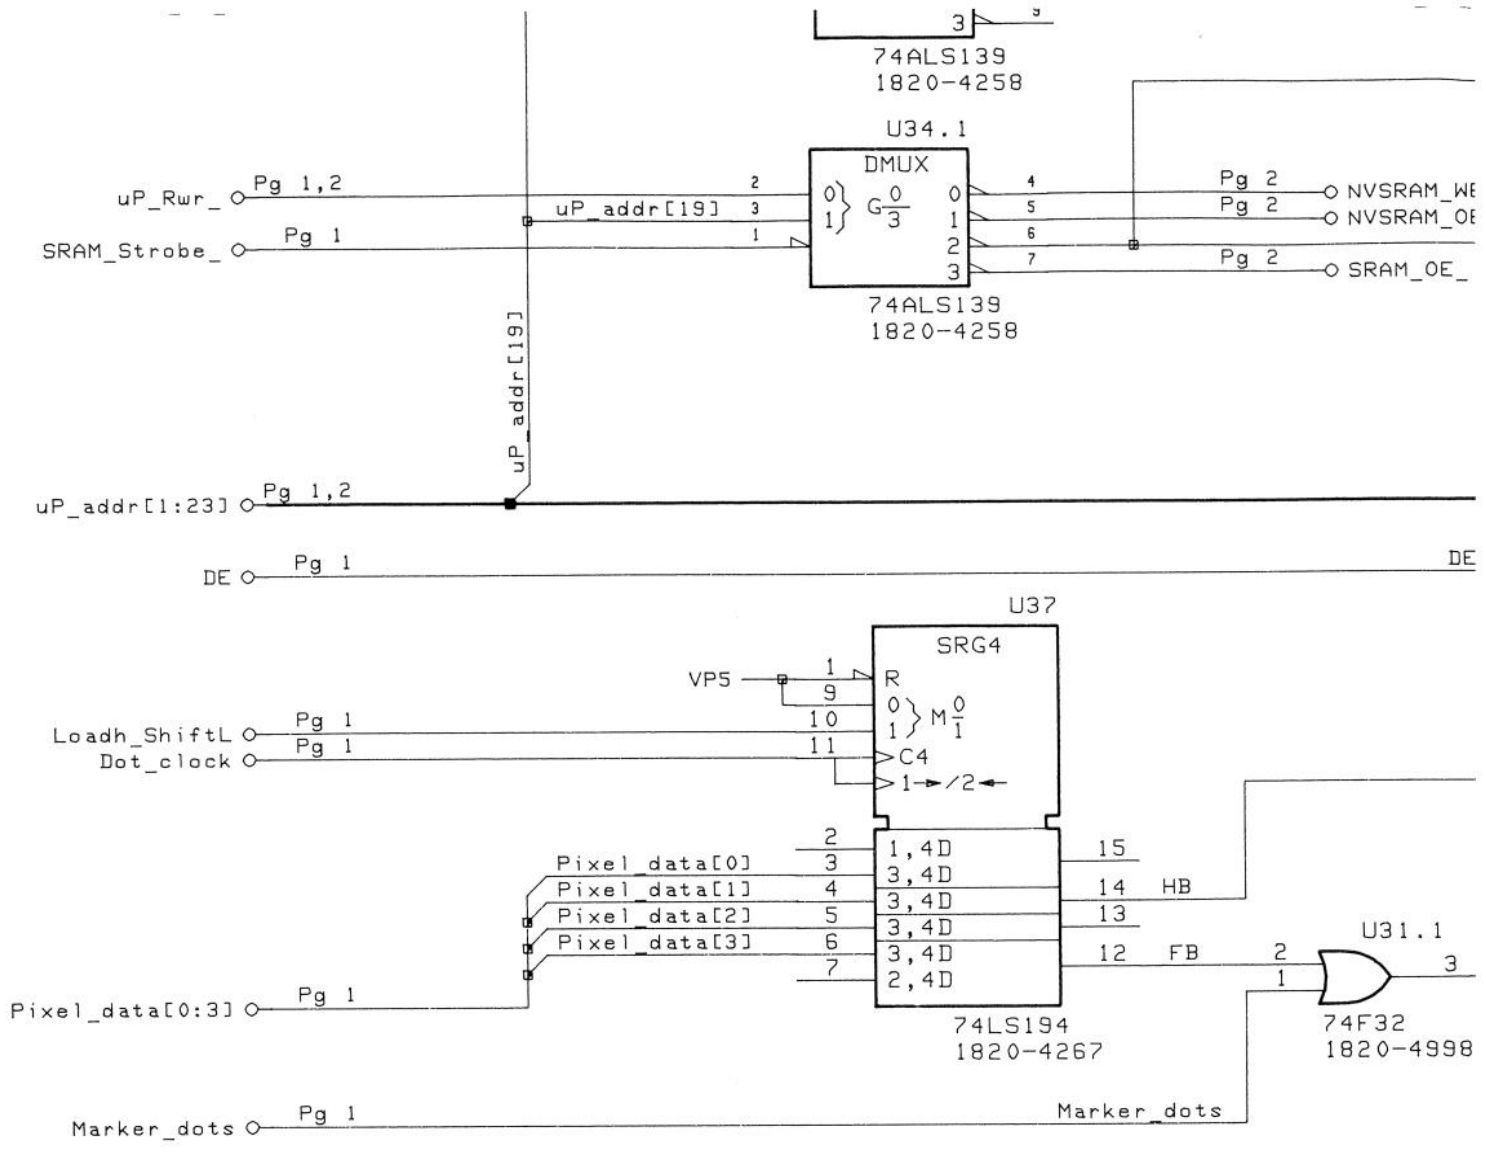

sheet 3 of 11
 page 1 lower

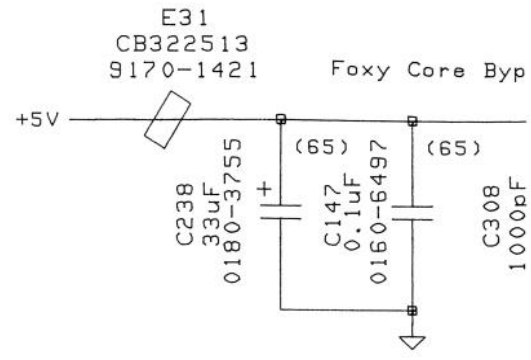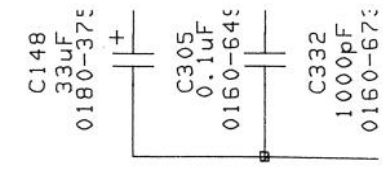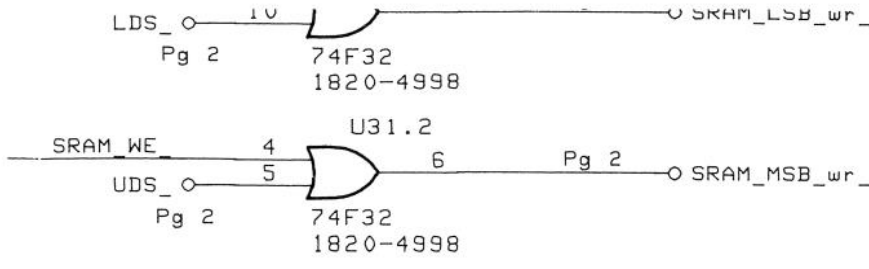


uP_addr[1:23]

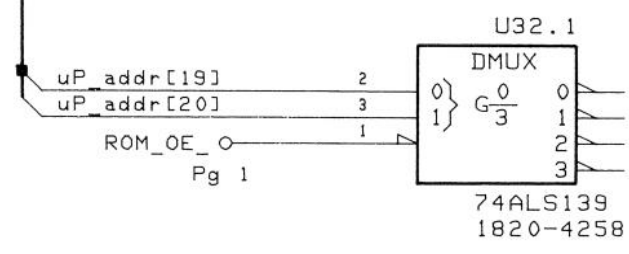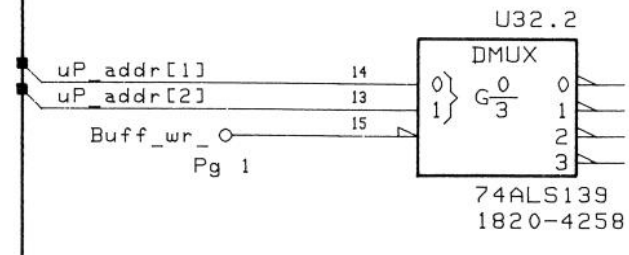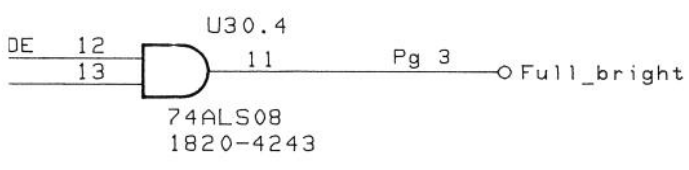
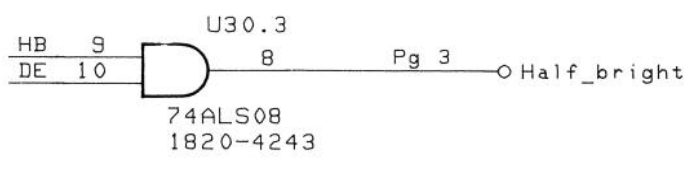


sheet 3 of 11





page 2 lower

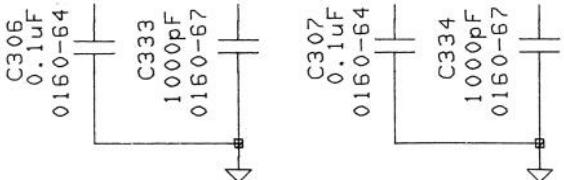

(#)=Foxy pin

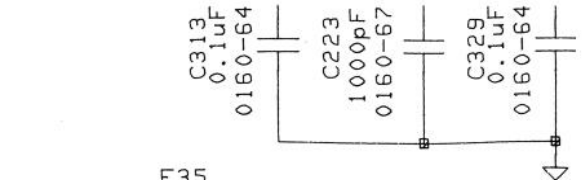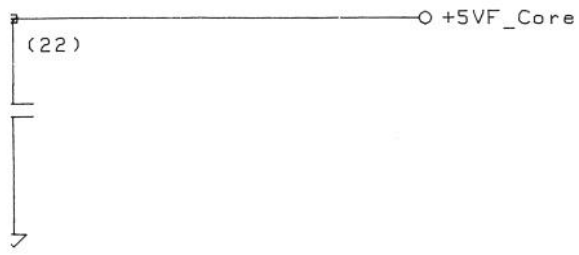


E35
CB322513
9170-1421 Aspen Trig Bypass

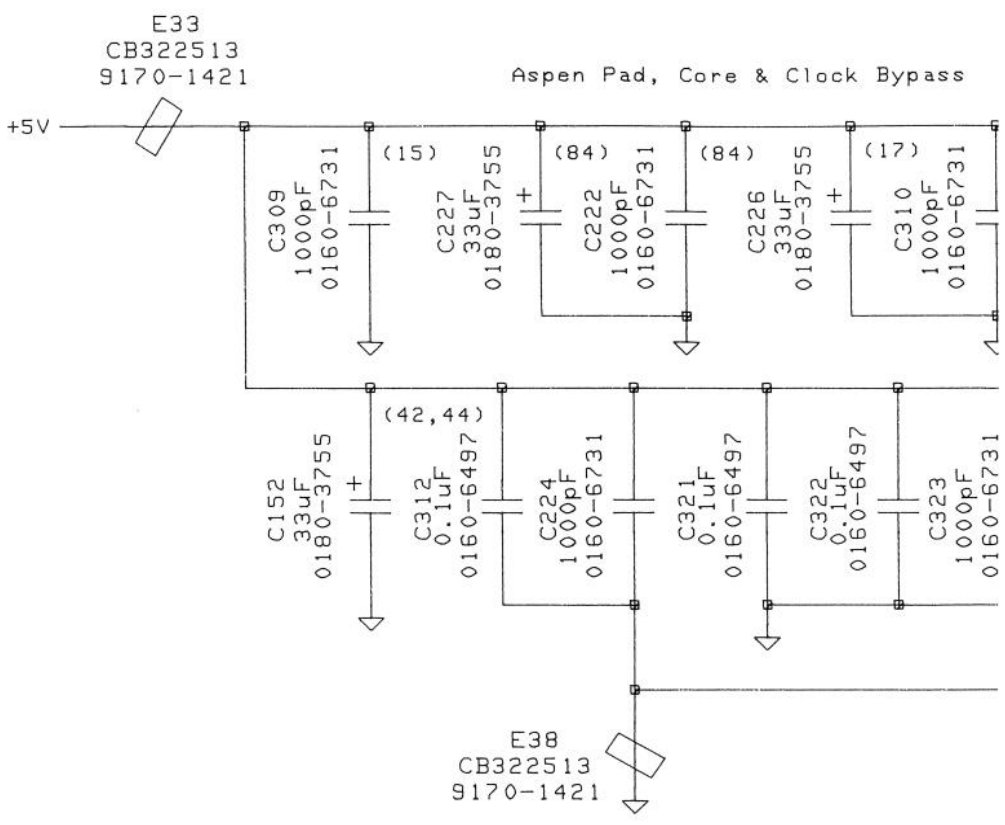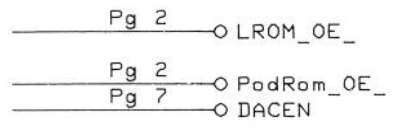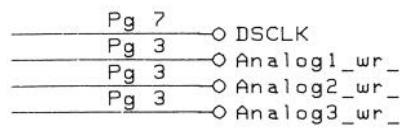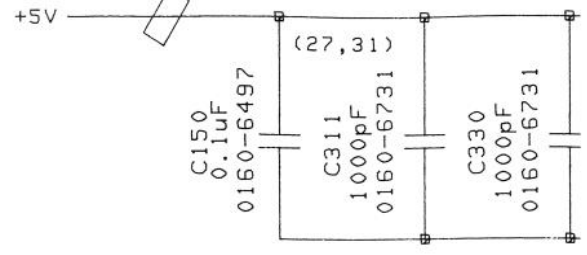

page 3 lower
sheet 3 of 11

(#)=Aspen pin

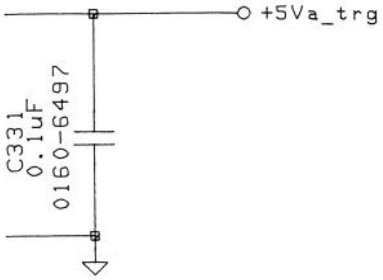

+5Va_pdcr

C113-131, 137-145, 147-152, 206, 210-211, 222-227, 232, 234, 238, 297, 305-313, 321-334

CR26

E31-35, 38

J5, 8

L3-5


R252-254, 256-259, 281, 401-403,

RP13.1, .5, .11, .12


U30.3-4, 31.1-3, 32, 34, 37, 39, 58-62

Power & Ground connections:

	U39	U30,31,61,62	U32,34,37	U58-60
+5V	8	14	16	20
GND	4	7	8	10

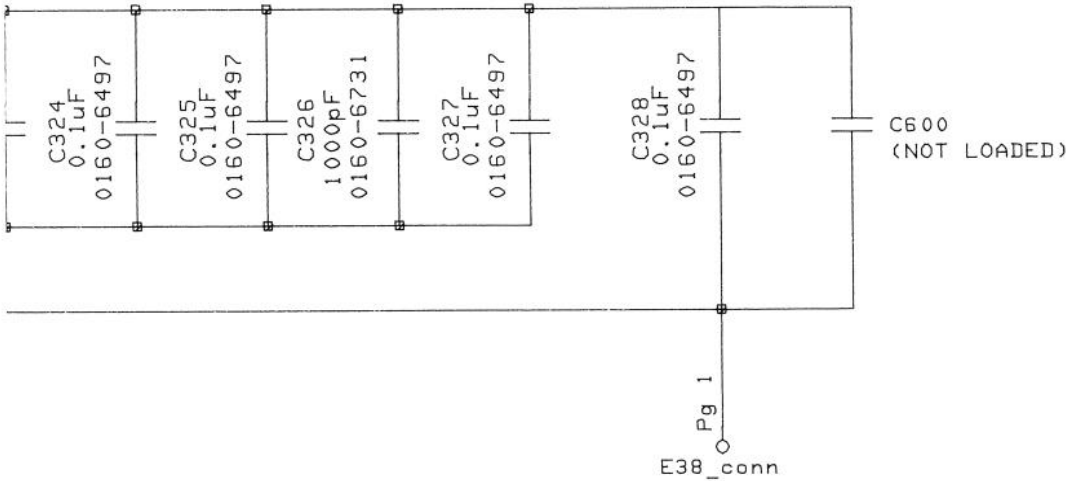

page 4 lower

DRAWN BY JIM STRINGER	DATE 6/27/91	ANALOG CONTROL REGS, DECODE, & POWER	 HEWLETT PACKARD
ENGINEER			
RELEASE TO PROD.		SCALE	SHEET 3 OF 11
SUPERSEDES DWG.			D-54600-66501-3