


Keysight Technologies

N7744A 4-Channel Optical Multiport Power Meter

N7745A 8-Channel Optical Multiport Power Meter

Data Sheet

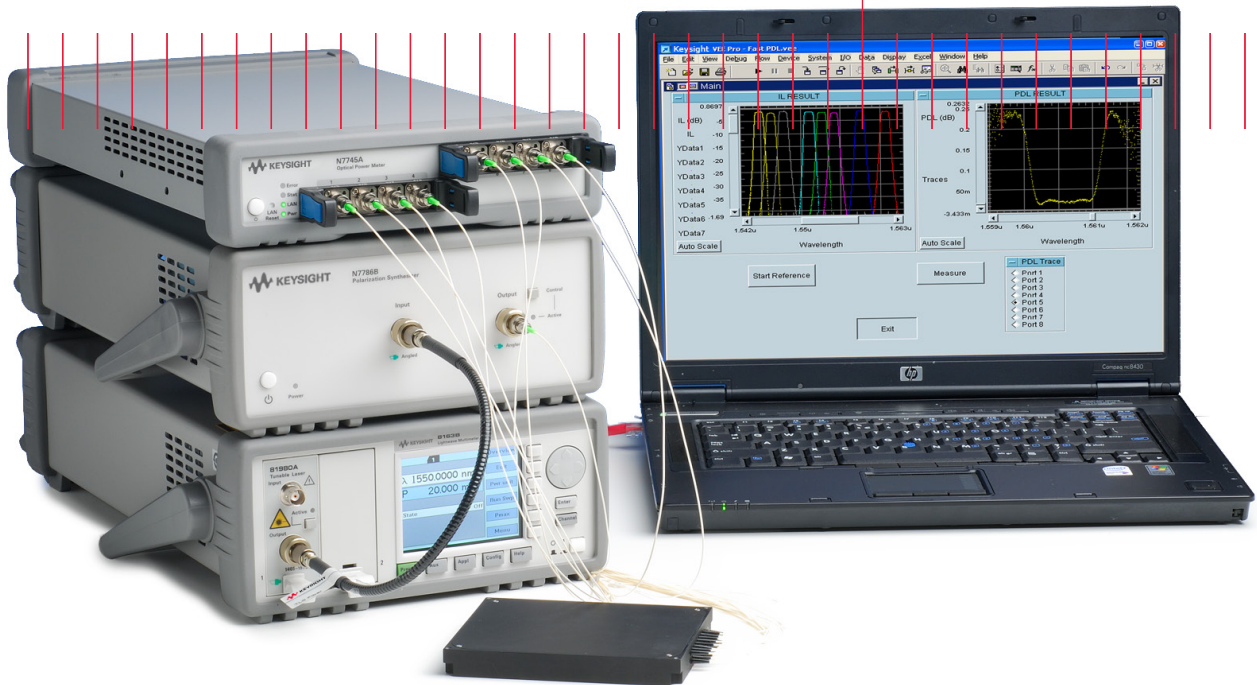

General Information

Up to 8 power meter channels in a small package

Keysight Technologies, Inc. new N7744A and N7745A optical power meters with four or eight power-sensor channels provide manufacturing customers with increased throughput and operational efficiency to meet today's challenges in manufacturing.

Designed for optical multiport applications

Designed for characterizing optical multiport components, these optical power meters offer industry-leading solutions for device connectivity, high-speed measurement data acquisition and fast data transfer for postprocessing. The multiport power meter enables fast measurement solutions for all multiport devices; for example multiplexers, PON splitters, wavelength selective switches (WSS) and ROADMs, as well as compact setups for simultaneous testing of multiple single-port devices.

Save significant rack space

These power meters achieve a level of space-saving channel density that is new in the industry, and simplify fiber handling for many-port device testing. This is complemented by the ease of integrating multiple instruments into a single setup with LAN or USB connections.

A single N7744A/45A is only one rack unit high and a half rack unit wide.

A reliable four-port optical connection with the new one click quad-adapter

With this new power meter comes the unprecedented N7740 fiber connectivity concept, which is a quadruple adapter with a snap-on quick-locking mechanism. The device to be tested can be connected to the quad-adapters in a comfortable ergonomic working position, even while the instrument is measuring another device.

The quad-adapters can be quickly snapped on to the instrument, to provide reliable and repeatable high-precision connections. Use of the quad-adapters simplifies aligning connector keys, especially for rack-mounted instruments and makes it easier to connect ports in the desired order, helping to avoid errors and connector damage.

This quad-adapter also fits into Keysight's standard bare fiber connectivity solutions 81000BI. The one click zeroing adapter N7740ZI allows quick and reliable 4-port zeroing of the new power meters.

Code compatible with your existing Keysight optical power meters

The new optical multiport power meter is code compatible with the Keysight optical power meter sensors and optical power meter heads. Simply replace up to eight existing single power meter modules with the new N7745A optical multiport power meter, adapt the new instrument configuration and run your existing application software.



Key benefits

10x faster than previous swept-wavelength measurement solutions

- High-speed measurement data acquisition and transfer of up to 1 million samples/channel
- Frequency response matched to averaging time and stable dark-current zeroing provide high dynamic range without distorting filter shapes at high sweep speed

25x higher time resolution for transient analysis

- Short minimum averaging time of 1 μ s

Unprecedented device connectivity (patented)

- Industry-leading solution to separate the connecting task from the measuring task
- Fibers can be comfortably attached to the quad-adapter away from the power meter
- The quad-adapter supports MU, FC, SC and LC connectors, as well as bare fiber connectors

Flexibility

- The instrument can be controlled via LAN and USB, as well as GPIB for compatibility with existing equipment
- The comprehensive hardware and trigger concept along with its large memory storage gives the flexibility to adapt the power meter to many test needs
- The instrument programming code is compatible to the Lightwave solution platform.

Definitions

Generally, all specifications are valid at the stated operating and measurement conditions and settings, with uninterrupted line voltage.

Specifications (guaranteed)

Describes warranted product performance that is valid under the specified conditions.

Specifications include guard bands to account for the expected statistical performance distribution, measurement uncertainties changes in performance due to environmental changes and aging of components.

Typical values (characteristics)

Characteristics describe the product performance that is usually met but not guaranteed. Typical values are based on data from a representative set of instruments.

General characteristics

Give additional information for using the instrument. These are general descriptive terms that do not imply a level of performance.

Optical Multiport Power Meter Specifications

Keysight N7744A, N7745A				
Sensor element	InGaAs			
Wavelength range	1250 nm to 1650 nm			
Specification wavelength range	1250 nm to 1625 nm (if not stated differently)			
Power range	-80 dBm to +10 dBm			
Maximum safe power	+16 dBm			
Data logging capability	2 buffers per port, each with capacity for 1 Mio. measurement points			
Averaging time	1 μ s to 10 s			
Applicable fiber type	Standard SM and MM \leq 62.5 μ m core size, NA \leq 0.24			
Uncertainty at reference conditions ^{1,3}	\pm 2.5%			
Total uncertainty ^{2,5,6}	\pm 4.5%			
Relative port to port uncertainty ^{1,3,4,10}	Typical \pm 0.05 dB			
Linearity ^{5,6} at (23 \pm 5) $^{\circ}$ C over operating temperature	\pm 0.02 dB \pm 3 pW \pm 0.04 dB \pm 5 pW			
Polarization dependent responsivity ^{3,7}	< \pm 0.015 dB (1520 nm to 1580 nm) Typical < \pm 0.01 dB (1250 nm to 1580 nm)			
Spectral ripple (due to interference) ⁹	< \pm 0.01 dB (1520 nm to 1625 nm) Typical < \pm 0.01 dB (1250 nm to 1520 nm)			
Drift ⁴	\pm 9 pW			
Noise peak-to-peak (dark) ³	< 7 pW (1 s averaging time, 300 s observation time)			
Noise 2σ ³ (100,000 samples)	Averaging time	1 μ s	25 μ s	1 ms
PM range				
-30 dBm	Typical	< 0.1 nW	< 0.025 nW	< 0.005 nW
-20 dBm	Typical	< 1.5 nW	< 0.15 nW	< 0.02 nW
-10 dBm	Typical	< 6 nW	< 0.5 nW	< 0.08 nW
0 dBm	Typical	< 60 nW	< 4 nW	< 0.8 nW
+10 dBm	Typical	< 600 nW	< 40 nW	< 8 nW

1. Reference conditions:

- Single mode fiber SMF 9 μ m.
- Power level: -20 dBm to 0 dBm.
- On day of calibration (add \pm 0.3% for aging over one year; add \pm 0.6% for aging over two years).
- Spectral width of source < 10 nm full width half maximum (FWHM).
- Wavelength setting of power sensor corresponds to source wavelength \pm 0.4 nm.

2. Operating conditions:

- Single mode fiber SMF. For multimode fiber, typical.
- Within one year of calibration; add \pm 0.3% for second year.
- Spectral width < 10 nm FWHM.
- Wavelength setting of power sensor corresponds to source wavelength \pm 0.4 nm.

3. Ambient temperature (23 \pm 5) $^{\circ}$ C.

4. Temperature constant within \pm 1 K after zeroing.

5. Excluding noise and offset drift.

6. Power range -60 dBm to +10 dBm.

7. Straight connector, SMF.

8. Connector 8 $^{\circ}$ angled, ceramic ferrule, SMF.

9. For constant state of polarization, source linewidth < 100 MHz, angled connector 8 $^{\circ}$, wavelength range 1520 nm to 1625 nm. Typical for 1250 nm to 1520 nm. Add \pm 0.01 dB typical within specification wavelength range for straight connector with ceramic ferrule.

10. Same 4-detector block, same wavelength.

Optical Multiport Power Meter Specifications (continued)

Keysight N7744A, N7745A				
Dynamic range (logging mode) ^{3,4}	Averaging time	1 μ s	25 μ s	1 ms
PM range				
-30 dBm	Typical	> 43 dB	> 49 dB	> 57 dB
-20 dBm	Typical	> 43 dB	> 54 dB	> 62 dB
-10 dBm	Typical	> 46 dB	> 57 dB	> 64 dB
0 dBm	Typical	> 46 dB	> 57 dB	> 63 dB
+10 dBm	Typical	> 43 dB	> 54 dB	> 60 dB
Port separation ⁵	> 85 dB (CW) (one neighbor port with 0 dBm)			
Port separation, dynamic ⁵	> 70 dB typical (one neighbor port with 0 dBm power in 0 dBm power meter range)			
Frequency response	3 dB cutoff frequency at 1 μ s averaging time, typical			
- -30 dBm range	- 10 kHz			
- -20 dBm range	- 130 kHz			
- -10 to +10 dBm range	- 250 kHz			
Return loss ⁸	> 50 dB (1520 nm to 1580 nm)			
	Typical > 57 dB (1280 nm to 1580 nm)			
Line power	AC 100 to 240 V \pm 10%, 50/60 Hz, 60 VA max.			
Operating temperature	+5 $^{\circ}$ C to +40 $^{\circ}$ C			
Operating humidity	15% to 95%, non-condensing			
Storage conditions	-40 $^{\circ}$ C to +70 $^{\circ}$ C			
Warm-up time	20 min.			
Recommended recalibration period	24 months			
Dimensions	372 mm \times 212 mm \times 43 mm (excluding front and back rubber cushions)			
Weight	3 kg (6 lb)			
LXI Compliance	LXI Class C, ver. 1.2			

3. Ambient temperature (23 \pm 5) $^{\circ}$ C.

4. Temperature constant within \pm 1 K after zeroing.

5. Excluding noise and offset drift.

8. Connector 8 $^{\circ}$ angled, ceramic ferrule, SMF.

Ordering Information

N7744A, N7745A ordering options	
N7744A	Optical Multiport Power Meter (4 channel)
N7745A	Optical Multiport Power Meter (8 channel)
	Includes: USB and cross-over LAN cables
Accessories	
N7740FI	FC connector adapter for Optical Multiport Power Meter
N7740KI	SC connector adapter for Optical Multiport Power Meter
N7740LI	LC connector adapter for Optical Multiport Power Meter
N7740MI	MU connector adapter for Optical Multiport Power Meter
N7740ZI	Blank zeroing connector adapter for Optical Multiport Power Meter
N7740BI	Bare fiber connector adapter for Optical Multiport Power Meter
81004BM	Bare fiber holder set for 0 to 400 μm fibers (4 each with gauge)
81009BM	Bare fiber holder set for 400 to 900 μm fibers (4 each with gauge)
Warranty	
Select coverage	
Included	3-year warranty (return to Keysight), standard
R-51B-001-5Z	5-year warranty assurance plan (return to Keysight): Priority warranty service includes one-time coverage for an EOS/ESD failure.
Calibration	
Select Keysight calibration plan	
R-50C-011-3	3-year calibration assurance plan (return to Keysight): Priority calibration service covering all calibration costs for 3 years; 15% cheaper than buying stand-alone calibrations.
R-50C-011-5	5-year calibration assurance plan (return to Keysight): Priority calibration service covering all calibration costs for 5 years; 20% cheaper than buying stand-alone calibrations.
R-50C-021-3	ANSI Z540-1-1994 up-front plan 3 year coverage
R-50C-021-5	ANSI Z540-1-1994 up-front plan 5 year coverage

1. *Guaranteed specification applies only for the above mentioned network analyzer options.*

Optical instruments online information	
Optical test instruments	www.keysight.com/find/oct
Optical Multiport Power Meter	www.keysight.com/find/MPPM
Polarization solutions	www.keysight.com/find/pol
Optical test instruments accessories	www.keysight.com/comms/oct-accessories
Firmware and driver download	www.keysight.com/comms/octfirmware
Keysight photonic discussion forum	www.keysight.com/find/photonic_forum

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)