


# Keysight Technologies RS-232/UART Protocol Triggering and Decode for Infiniium 9000A and 9000 H-Series Oscilloscopes

Data Sheet

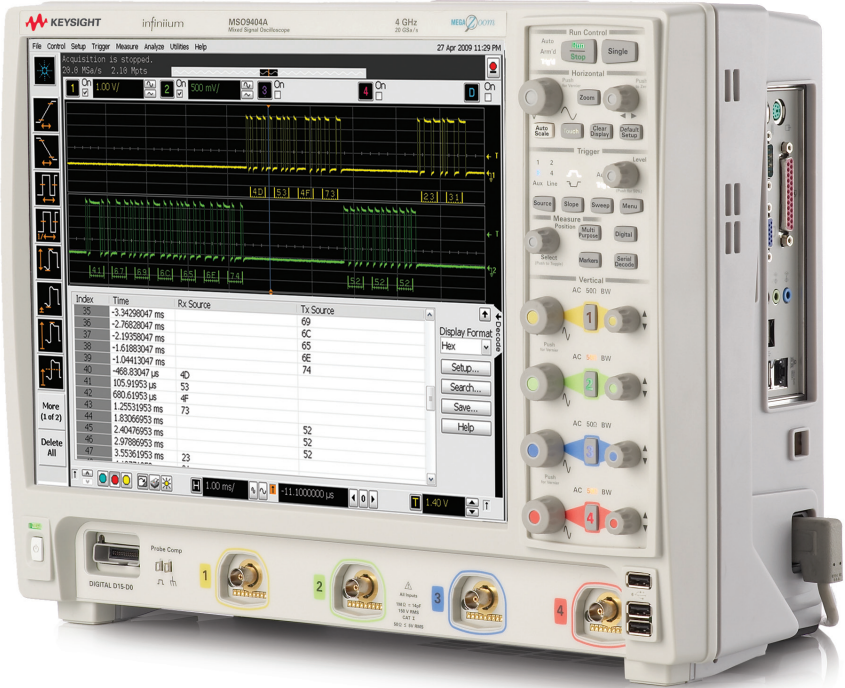

This application is available in the following license variations.

- Order N5462B for a user-installed license
- Order Option 001 for a factory-installed license with new 9000A and 9000 H-Series oscilloscopes
- Order N5435A Option 031 for a server-based license

## Easily debug and test designs that include RS-232/UART using your Infiniium 9000A and 9000 H-Series oscilloscopes

Lower-speed serial bus interfaces such as RS-232 and other UART (universal asynchronous receive and transmit) interfaces are widely used today in electronic designs. In many designs these serial buses tend to provide content-rich points for debug and test. However, since these protocols transfer bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol requires significant effort, can't be done in real-time, and includes potential for human error. In addition, traditional scope triggers are not sufficient for specifying protocol-level conditions.


Extend your scope capability with the Keysight Technologies, Inc. RS-232/UART Triggering and Decode application. This application makes it easy to debug and test designs that include RS-232/UART protocols using your Infiniium 9000A and 9000 H-Series oscilloscopes.

- Set up your scope to show RS-232/UART protocol decode in less than 30 seconds.
- Get access to a rich set of integrated protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Use time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.




### Easy to find

Turn decode on/off via the "Serial Decode" button on the front of the instrument or in the "Setup" menu. View decode embedded on the waveform display or in the protocol viewer listing window. (See pages 4-5).

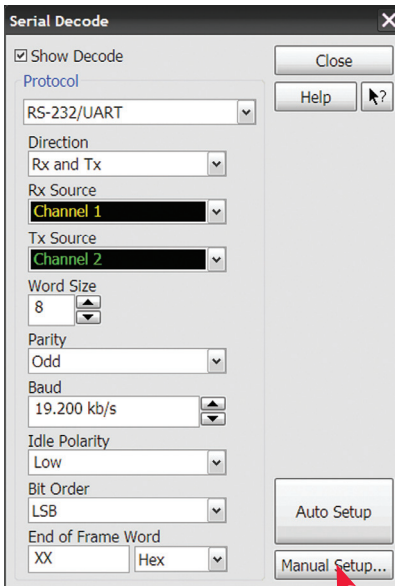

### 30 Second RS-232/UART Setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth and threshold and trigger levels.

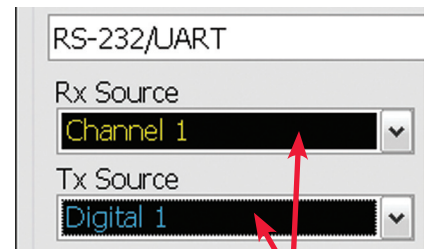


### Support for both analog and digital channels

Acquire serial buses using any combination of scope or digital channels. Using digital channels on MSO models preserves analog channels for viewing other time-correlated signals.

# RS-232/UART setup and triggering


Get access to a rich set of integrated protocol level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to RS-232/UART. When serial triggering is selected, the application enables special real-time triggering hardware inside the scope.

Hardware-based triggering ensures that the scope never misses a trigger event when armed. This hardware takes signals acquired using either scope or digital channels and reconstructs protocol frames. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.

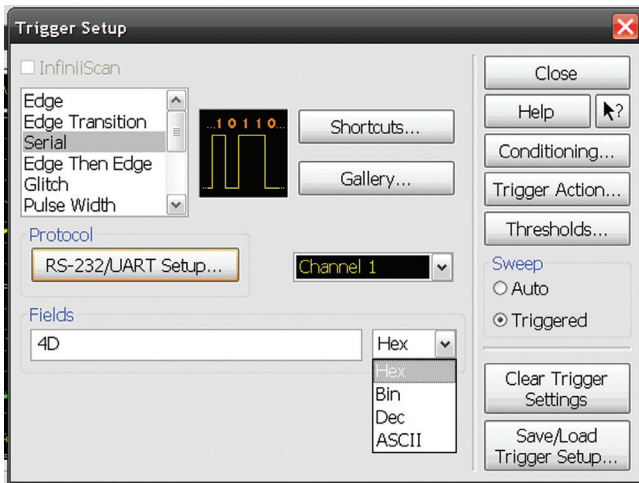

## RS-232 Trigger Setup

Quickly access protocol triggering via the scope's trigger menu. Specify RS-232 trigger in HEX, binary decimal, or ASCII up to 27 words.

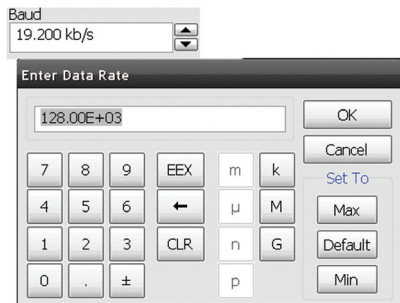


## Baud rate settings

Enter any baud rate between 1,200 kb/s and 10 Mb/s, or click on up/down arrows to go to one of many pre-defined common baud rates.



## Set trigger



Enter trigger condition in HEX, binary, decimal or ASCII.

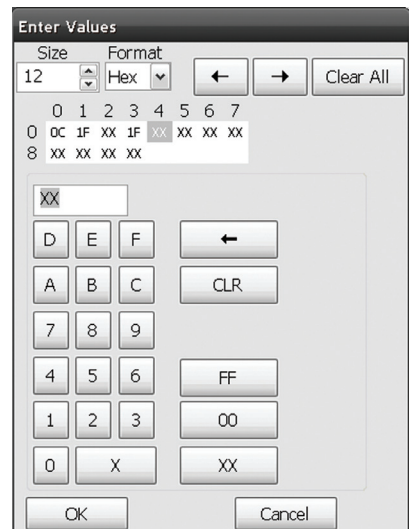

## Payload editor

Choose trigger length between one to 27 words and use the payload editor to specify data values word by word.


# RS-232/UART protocol decode and searching

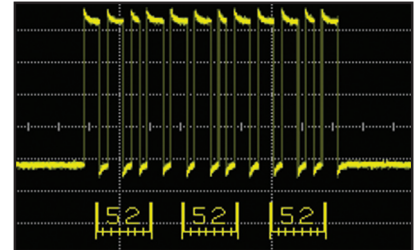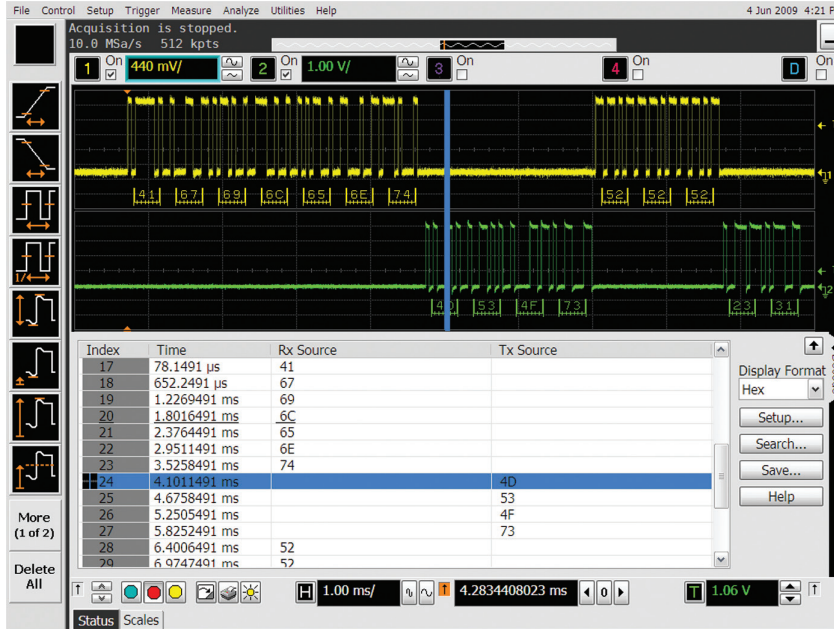

## RS-232 decode embedded in waveform area


Utilize the oscilloscope waveform area to display decode information. Minor ticks indicate clock transitions and major ticks show the beginning and end of each word in the serial packet.

Keysight's protocol viewer includes correlation between the waveforms and the selected packet. The selected packet, highlighted blue row in the listing, is time-correlated with the blue line in the waveform display. Move the blue tracking marker in time through waveforms and the blue bar will automatically track in the packets window. Or, scroll through the packet viewer and highlight a specific packet. The time-correlation tracking marker will move to the associated point in the waveform.

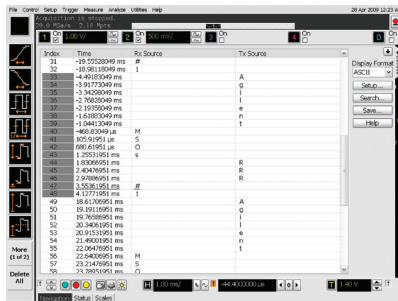


## Full screen RS-232 listing

Fill the entire display with compact protocol information using the full screen listing. The protocol viewer window shows the index number, time stamp value, and data content for each serial packet in the list. Scroll through all decoded serial packets to find events of interest or errors in the transmission. Data in the listing window can be saved to a .csv or .txt file for off-line analysis or documentation.

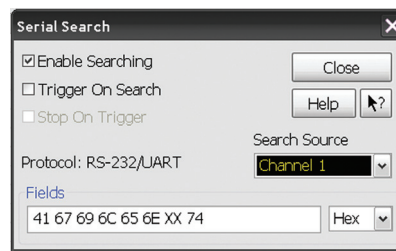

## Post-acquisition searching

Search acquired protocol listings using a menu that is identical to the trigger menu.

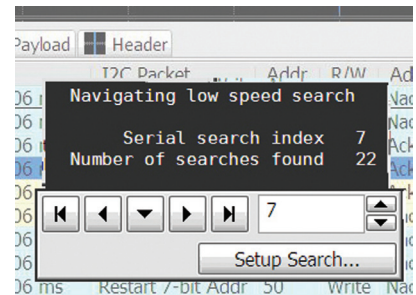


## Quickly find occurrences


Quickly move to next occurrence of a specified event.




# RS-232/UART protocol decode

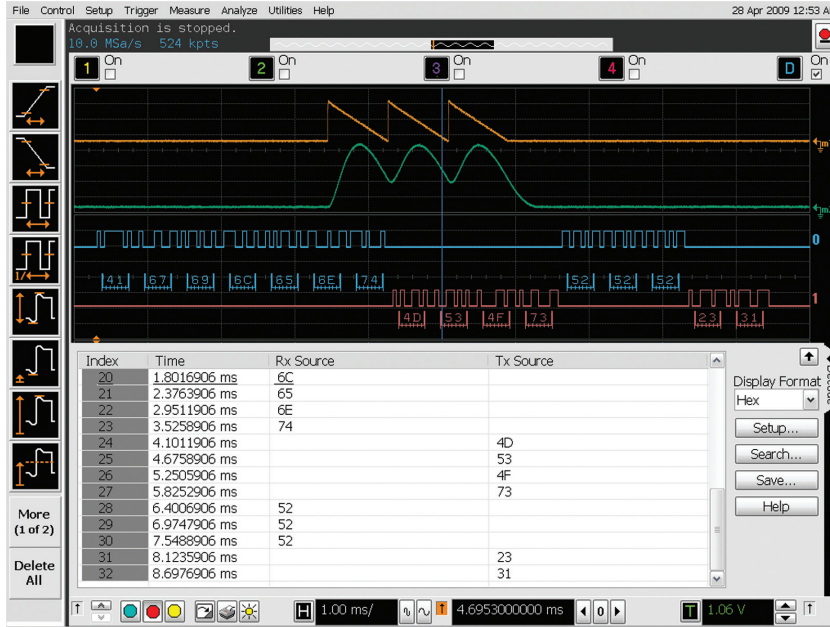


Use digital channels on MSO models to preserve analog channels for simultaneously viewing other signals.

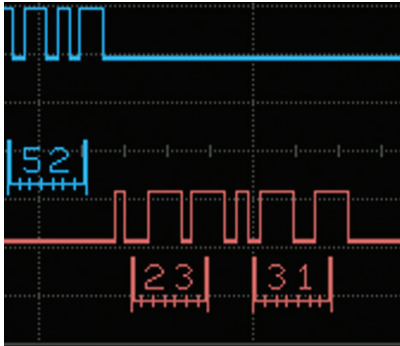

See RS-232 decode next to digital waveforms.

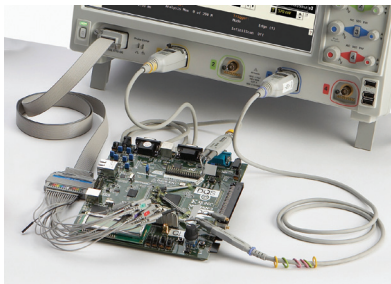

Use digital or analog for RS-232/UART triggering and decode.

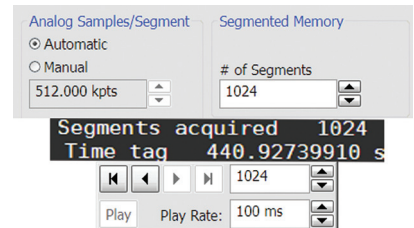

Capture seconds to days of serial protocol. The scope fills memory as each acquisition sees it's trigger condition. Segmented memory uses time tags to track time between segment acquisitions.

## RS-232/UART specifications and characteristics

UART protocols supported	RS-232 RS-422 up to 10 Mbps, differential probing recommended. RS-485 up to 10 Mbps, differential probing recommended. Other UART interfaces which admit to user-specified parameters available in the application. The application relies on probing and trigger/measurement thresholds to properly condition the signal for triggering and decode.
Tx and Rx source	Analog channels 1, 2, 3, or 4 MSO models can additionally use digital channels D0 to D15 Any waveform memory
Auto setup	Automatically configures trigger levels, measurement thresholds, memory depth, sample rate, trigger and holdoff for proper decode and triggering.
Decode word size	User-selectable: 5, 6, 7, 8, or 9 bits Parity: odd, even, none
Decode bit order	User-selectable: LSB or MSB
Supported baud rates	User selectable: 1.2 kb/s up to 10 Mb/s
Idle Polarity	User selectable: low or high
Triggering	User selectable: transmit or receive User selectable data length: 1 to 13 words (each word takes 2 trigger symbols) Word size selectable from 5 to 9 bits Polarity error Enter trigger in HEX, binary, decimal or ASCII Operators include =, not =, >, < and OR on each 8-bit word boundary


## Ordering information

This application is compatible with all 9000A and 9000 H-Series oscilloscope models.


Software applications	Factory-installed node-locked license for new scope purchases	User-installed node-locked licenser	Server-based license (N5435A option)
RS-232/UART triggering and decode	001	N5462B	031
RS-232, I <sup>2</sup> C/SPI triggering and decode	018	N8800B	

## Related literature

Publication title	Publication type	Publication number
Infiniium 9000 Series	Data Sheet	5990-3746EN
Infiniium 9000 H-Series	Data Sheet	5991-1520EN

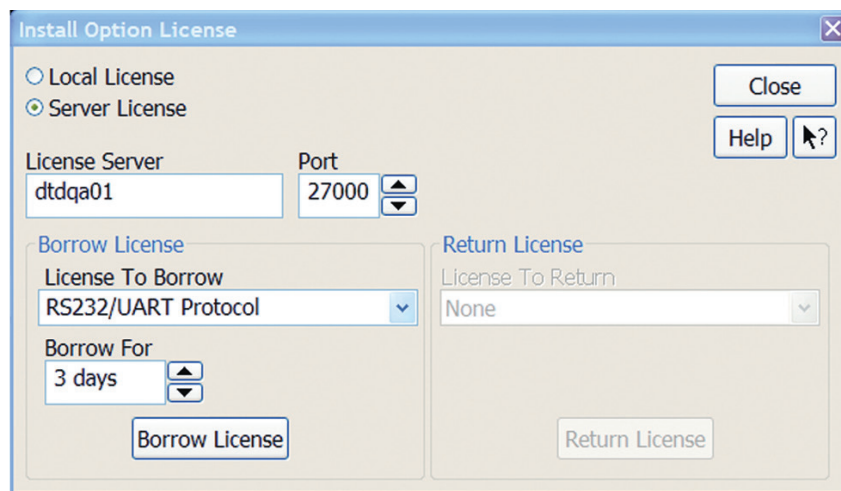

Sharing the application across multiple instruments? Server-based licensing allows users to borrow an application license for a fixed time period.

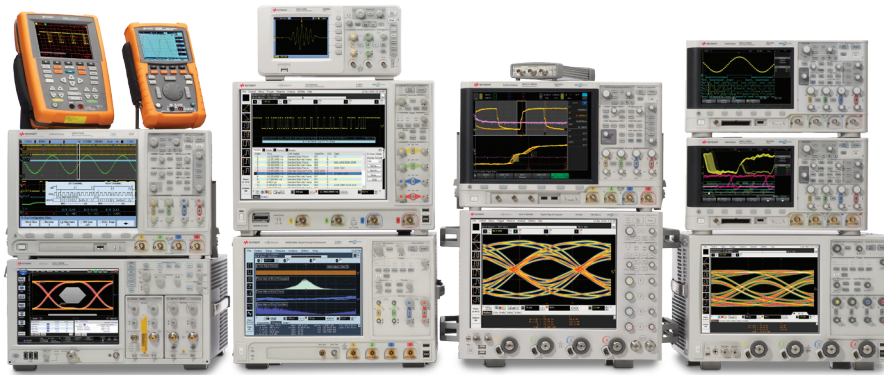

## Keysight Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-07-10-14)

### myKeysight

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[www.axiestandard.org](http://www.axiestandard.org)



AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.

[www.lxistandard.org](http://www.lxistandard.org)



LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/quality](http://www.keysight.com/quality)

Keysight Technologies, Inc.  
 DEKRA Certified ISO 9001:2008  
 Quality Management System



### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/9000\\_RS-232](http://www.keysight.com/find/9000_RS-232)

