


Keysight Technologies Signal Generator Selection Guide

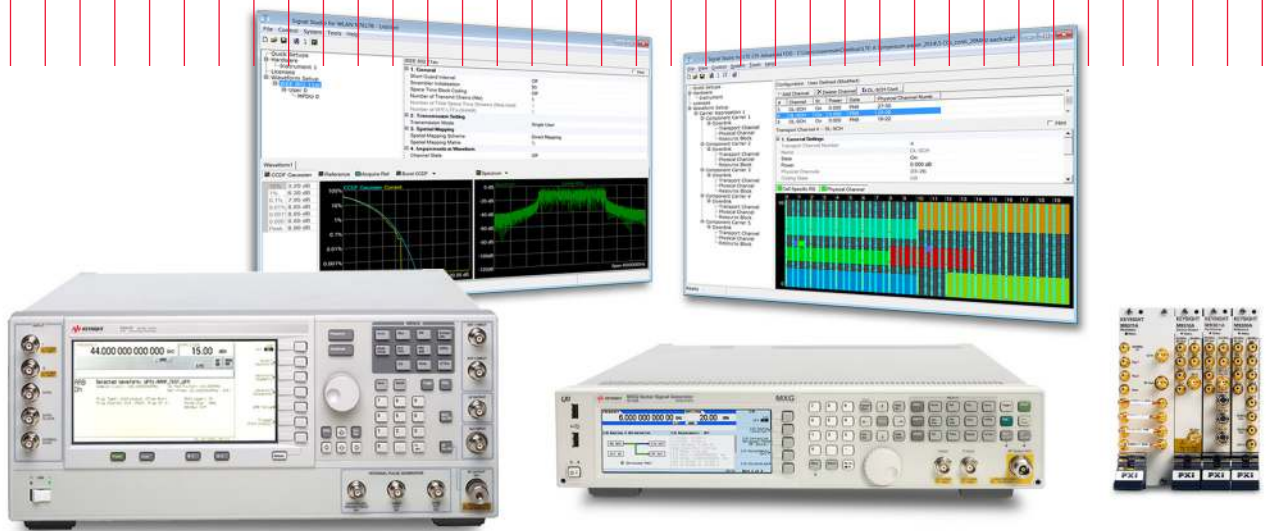


Introduction

Keysight Technologies, Inc. offers the widest selection of signal generators from baseband to 67 GHz, with frequency extensions to 1.1 THz. From basic to advanced functionality, each signal generator delivers benchmark performance in its class to address the requirements in design and manufacture of radio transceivers and their components; and applications ranging from low-frequency navigation signals, through cellular mobile radio, to millimeter wave RADAR and satellite systems. Each offers synthesized frequency accuracy and stability, excellent calibrated level accuracy, and remote programmability. Modulation

capabilities vary from general-purpose AM, FM and digital I/Q to standard-specific formats such as GSM, W-CDMA, HSPA, LTE, GPS, and wireless LAN. Keysight provides signal generators in multiple form factors, including benchtop and modular PXI.

This selection guide provides an overview and side-by-side comparisons to help you determine which signal generator is right for you. It is intended to supplement online selection tools available at www.keysight.com/find/sg.

Frequency coverage for Keysight signal generators

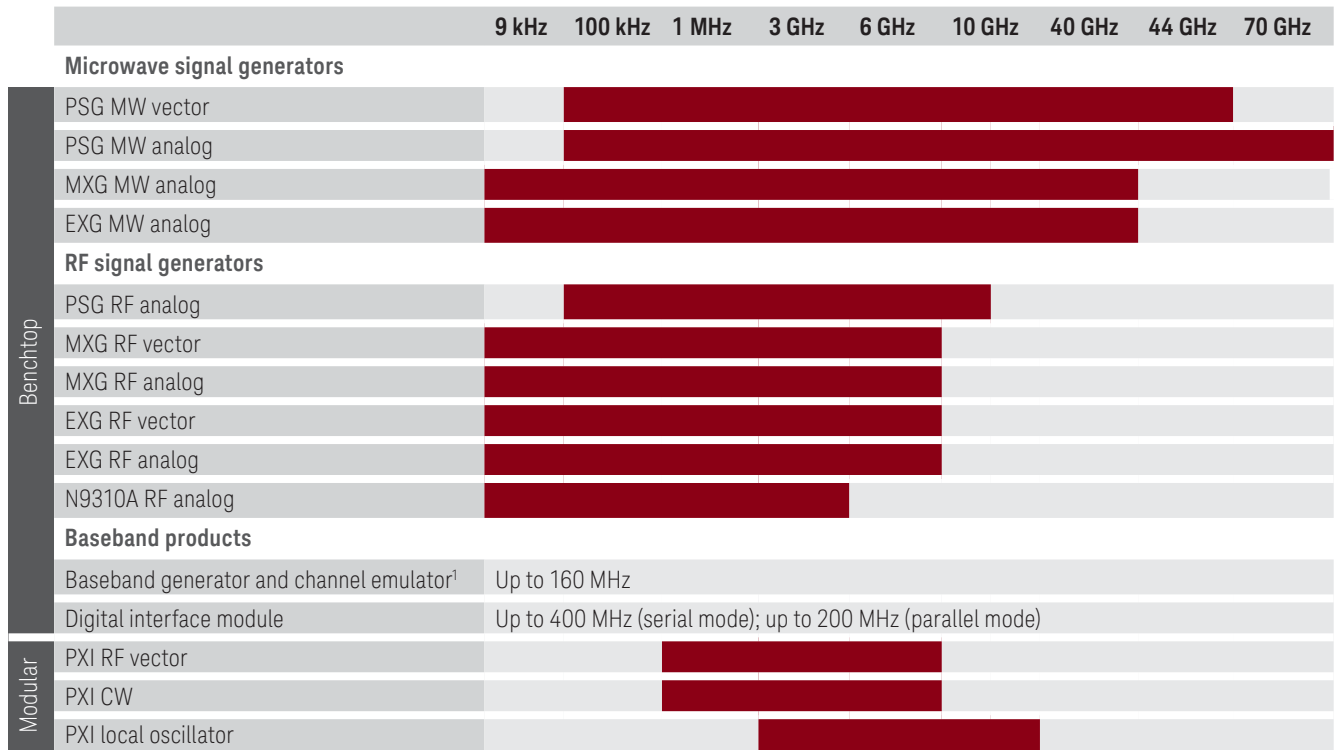

1. Additional high performance baseband arbitrary waveform generators with up to 5 GHz analog bandwidth can be found at: www.keysight.com/find/arbs

Product Categories

Benchtop and modular PXI signal generators

Benchtop signal generators are well-suited for R&D or design verification, where analysis and troubleshooting benefit from interactive analysis. Benchtop models range from RF to microwave with a broad range of capabilities so you can select which generator best suits your needs.

Modular PXI signal generators are ideal for applications that require multi-channel measurement capabilities, fast measurement speed and a small footprint. They also offer scalability and flexibility to configure solutions with a shared processor, chassis and other modular instruments. The PXI vector signal generator can be used with the same software applications as bench top signal generators, providing measurement consistency and compatibility throughout the product development cycle.

Vector signal generators

Vector signal generators or digital signal generators have a built-in I/Q modulator to upconvert complex modulation formats such as QPSK and 64QAM. When combined with an IQ baseband generator, virtually any signal can be emulated and transmitted within the information bandwidth supported by the system.

Analog signal generators

Analog signal generators supply sinusoidal continuous wave (CW) signals with optional capability to add AM, FM, Φ M and pulse modulation. The maximum frequency range for analog signal generators span from RF to microwave. Most generators feature step/list sweep modes for passive device characterization or calibration.

Key Specifications Comparison	4
Application and Software Comparison	6
Signal Studio Software	7
Benchtop	
PSG signal generators	8
X-Series signal generators	10
RF analog signal generator	12
Baseband generator and interface module	13
Modular	
PXI signal generators	14
Migrating from Legacy Signal Generators	16

Baseband generator and channel emulator

Baseband generators (BBG) output complex I/Q signals such as QPSK, and can have several modes of operation:

Waveform playback mode to play repetitive signals for component testing

- Real-time mode to transmit non-repeating/dynamic signals for receiver test
- Digital IQ input or output mode to stimulate FPGAs, DACs or ADCs

Channel emulators are used to simulate the medium through which RF waves propagate. They can replicate multi-path and multi-channel fading for SISO or MIMO transceivers typically used to test the sensitivity, throughput or function of devices under test.

Signal creation software

Signal creation software products enable the generation of a wide range of application-specific test signals using vector signal generators. They can easily create signals to evaluate the performance of radio designs and the components that comprise them under various parametric and functional test conditions at baseband, RF and microwave frequencies. Keysight's Signal Studio software runs on a PC and embedded software runs directly on the signal generator.

Key Specifications Comparison—Vector Signal Generators

Specifications	Benchtop			Modular
	PSG MW	MXG RF	EXG RF	PXI RF
Model number	E8267D	N5182B	N5172B	M9381A
Performance	*****	****	***	****
Frequency range (min. to max.)	100 kHz to 44 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz	1 MHz to 6 GHz
Frequency switching (list mode)	9 ms	800 μ s	800 μ s	< 10 to 240 μ s
Sweep mode	Step, list, ramp	Step, list	Step, list	Step, list
Output power (minimum)	-130 dBm	-144 dBm	-144 dBm	-130 dBm
Output power (maximum; at 1 GHz)	+22 dBm (at 20 GHz)	+24 dBm	+21 dBm	+19 dBm
Level accuracy (at 1 GHz)	\pm 0.8 dB (at 20 GHz)	\pm 0.6 dB	\pm 0.6 dB	\pm 0.4 dB
SSB phase noise (at 1 GHz; 20 kHz offset)	-143 dBc/Hz (at 10 kHz offset)	-146 dBc/Hz	-122 dBc/Hz	-122 dBc/Hz
Harmonics (at 1 GHz)	-55 dBc	-35 dBc	-35 dBc	-34 dBc
Non-harmonics (at 1 GHz)	-88 dBc	-96 dBc	-72 dBc	-70 dBc nominal
AM rate	DC to 100 kHz	DC to 50 kHz	DC to 50 kHz	6.2 MHz
FM deviation (maximum)	1 to 128 MHz	1 to 16 MHz	2.5 to 40 MHz	1.24 MHz
PM phase deviation (maximum in normal mode)	1 to 800 rad	0.5 to 8 rad	1.25 to 20 rad	10 rads
Narrow pulse width	20 ns	20 ns	20 ns	20 ns
EVM (LTE)	0.8%	0.2%	0.2%	0.32%; 0.25% @ 900 MHz
ACPR (3GPP W-CDMA TM1 64 DPCH)	-64 dBc (16QAM, 10 GHz)	-73 dBc	-73 dBc	-70 dBc
Internal baseband generator RF BW	80 MHz	160 MHz	120 MHz	160 MHz
External I/Q modulator RF BW	Up to 2 GHz	Up to 200 MHz	Up to 200 MHz	--
Waveform playback memory	64 Msa	1024 Msa	512 Msa	1024 Msa
Baseband generator mode	Waveform playback and real-time IQ	Waveform playback and real-time	Waveform playback and real-time	Waveform playback



Key Specifications Comparison—Analog Signal Generators

Specifications	Benchtop							Modular	
	PSG MW	MXG MW	EXG MW	PSG RF	MXG RF	EXG RF	RF	PXI local oscillator	PXI CW source
Model number	E8257D	N5183B	N5173B	E8663D	N5181B	N5171B	N9310A	M9302A	M9380A
Performance	*****	****	****	****	****	***	**	**	**
Frequency range (min. to max.)	100 kHz to 70 GHz	9 kHz to 40 GHz	9 kHz to 40 GHz	100 kHz to 9 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz	9 kHz to 3 GHz	3 GHz to 10 GHz	1 MHz to 6 GHz
Frequency switching (list mode)	9 ms	600 μ s	600 μ s	9 ms	800 μ s	800 μ s	10 ms	500 μ s	5 ms
Sweep mode	list, step, ramp	list, step	list, step	list, step, ramp	list, step	list, step	list, step	NA	NA
Output power (minimum)	-135 dBm	-130 dBm	-130 dBm	-135 dBm	-144 dBm	-144 dBm	-127 dBm	NA	-130 dBm
Output power (at 1 GHz)	+26 dBm (at 20 GHz)	+20 dBm (at 20 GHz)	+20 dBm (at 20 GHz)	+23 dBm	+24 dBm	+21 dBm	+13 dBm	+16 dBm	+19 dBm
Level accuracy	\pm 0.8 dB (at 20 GHz)	\pm 0.7 dB (at 10 GHz)	\pm 0.7 dB (at 10 GHz)	\pm 0.6 dB	\pm 0.6 dB	\pm 0.6 dB	\pm 1.0 dB	\pm 2 dB	\pm 0.4 dB
SSB phase noise (1 GHz, 20 kHz offset)	-126 dBc/Hz (at 10 GHz, 10 kHz offset)	-124 dBc/Hz (at 10 GHz)	-101 dBc/Hz (at 10 GHz)	-143 dBc/Hz (at 10 kHz offset)	-146 dBc/Hz	-122 dBc/Hz	-95 dBc/Hz	-115 dBc/Hz (10 GHz, 10 kHz offset)	-122 dBc/Hz
Harmonics (at 1 GHz)	-55 dBc	-55 dBc (at 10 GHz)	-55 dBc (at 10 GHz)	-55 dBc	-35 dBc	-35 dBc	-30 dBc	-20 dBc	-29 dBc
Non-harmonics (at 1 GHz)	-88 dBc	-100 dBc	-72 dBc	-88 dBc	-96 dBc	-72 dBc	-50 dBc	-70 dBc	-70 dBc
AM rate	DC to 100 kHz	DC to 100 kHz	DC to 100 kHz	DC to 100 kHz	DC to 50 kHz	DC to 50 kHz	20 Hz to 20 kHz	NA	NA
FM deviation (maximum)	1 to 128 MHz	1 to 128 MHz	2.5 to 320 MHz	1 to 16 MHz	1 to 16 MHz	2.5 to 40 MHz	100 kHz	NA	NA
PM phase deviation (maximum, in normal mode)	1 to 1280 rad	0.5 to 64 rad	1.25 to 160 rad	1 to 160 rad	0.5 to 8 rad	1.25 to 20 rad	10 rad	NA	NA
Narrow pulse width	20 ns	20 ns	20 ns	20 ns	20 ns	20 ns	100 μ s	NA	NA

Applications, Core Capabilities and Software Comparison

Applications and signal creation software	Benchtop		Modular	Benchtop			PSG RF	N9310 RF	PXB
	PSG MW	MXG and EXG RF	PXI RF	PSG MW	MXG and EXG MW	MXG and EXG RF			
	Vector			Analog					
Instrument embedded capabilities									
USB power meter		■			■	■			
Step/list sweep	■	■	■	■	■	■	■	■	■
Ramp sweep	■			■			■		
AM, FM, PM, pulse	■	■	■	■	■	■	■	■	
LF function generator	■	■		■	■	■	■	■	
Real-time custom modulation (PSK, QAM, FSK)	■	■							
Phase noise impairments		■							
Multitone, NPR	■	■							
Noise (AWGN)	■	■							■
Pulse Train		■			■	■			
SystemVue, MATLAB	■	■	■						■
Real-time fading									■
Signal Studio software									
Cellular communications									
LTE & LTE-Advanced FDD/TDD, W-CDMA/HSPA+, cdma2000®, 1xEV-DO, GSM/EDGE/Evo, TD-SCDMA	■	■	■						■
Wireless networking									
WLAN 802.11a/b/g/j/p/n/ac, Mobile WiMAX, <i>Bluetooth</i>	■	■	■						■
Fixed WiMAX	■	■	■						
Audio/video broadcast									
DVB-T/H/T2/S/S2, DVB-C (J.83 Annex A/C), J.83 Annex B (DOCSIS DS), ISDB-T/Tmm, ATSC, ATCS-M/H, DTMB (CTTB), CMMB	■	■	■						■
T-DMB, DAB/DAB+/DMB-audio, FM stereo with RDS/RBDS		■	■						■
Detection, positioning, tracking, & navigation									
Pulse building	■	■							
Multitone distortion, NPR	■	■							■
GPS, GLONASS, Galileo, Beidou, SBAS, QZSS	■	■	■						■
Wideband waveform center software									
Wireless HD, WiGig, 802.11ad	■								

Signal Studio Software

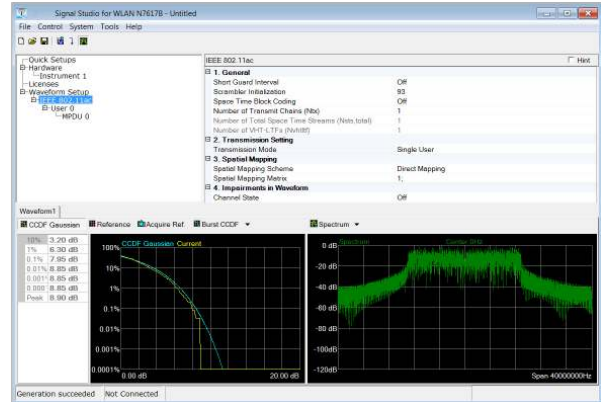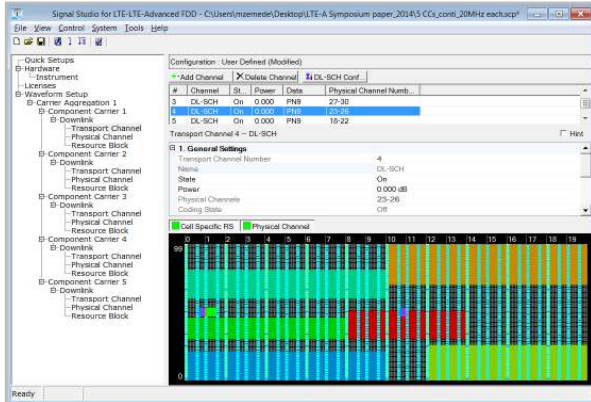

Simplify signal creation

Connect your vector source to Signal Studio—and simplify signal creation. Whether you are working on a single radio format or integrating multiple formats into a single device, easy access to the right test signals streamlines validation and helps ensure interoperability. Accelerate your work with Keysight Signal Studio software, a flexible suite of signal-creation tools that reduces the time you spend on signal simulation. Its performance-optimized reference signals, validated by Keysight, enhance the characterization and verification of your devices.

Configure Signal Studio to match your requirements:

- Choose basic or advanced levels of capability with scalable option structure
- Select the license type that fits your specific use case and budget, including fixed, transportable, and 5- or 50-pack waveforms
- Connect to a wide range of Keysight instruments
- Runs on a PC

Leverage and customize built-in signals with flexible signal generation, additive impairments, graphs, convenient connectivity and automation, and embedded and online documentation. Control your vector signal generator directly from the software GUI and/or from the instrument front panel.

General purpose

- Jitter injection
- Multitone, NPR
- Waveform download utility

Cellular communications

- LTE & LTE-Advanced FDD/TDD,
- W-CDMA/HSPA+, cdma2000, 1xEV-DO, GSM/EDGE/Evo, TD-SCDMA

Wireless connectivity

- WLAN 802.11a/b/g/j/p/n/ac/ad
- Mobile WiMAX, Fixed WiMAX
- *Bluetooth*

Audio/video broadcasting

- ATSC, CMMB, DTMB, DVB, S-DMB, T-DMB
- ISDB-T, J.83 Annex A/B/C
- DAB, DAB+, DMB
- DOCSIS
- FM Stereo, RDS/RBDS

Detection, positioning, tracking, and navigation

- Pulse building
- GPS, GLONASS, Galileo, Beidou, SBAS, QZSS, Radar

www.keysight.com/find/SignalStudio

Free Trial License

Free 30-day trials of Signal Studio software are available to evaluate the user interface and generate signals. Redeem a trial license online at www.keysight.com/find/SignalStudio_trial

PSG Signal Generators

The PSG is the industry's most trusted microwave signal generator, with thousands of units deployed in hundreds of programs around the world. With metrology-grade performance and evolving capabilities across RF and microwave frequencies, it continues to enable new designs that stay ahead of emerging threats.



PSG microwave signal generator E8267D vector

- Test advanced receivers with realistic wideband radar, EW and SATCOM waveforms up to 44 GHz
- Flexible integrated 80 MHz AWG, real-time and base-band generator to simulate cellular, wireless, GPS and custom communications
- Exercise advanced EW, radar and satellite systems with Signal Studio, a vector PSG and a wideband AWG such as the Keysight M8190A for up to 2 GHz bandwidth
- Test phased-array systems and direction-finding receivers with multiple phase-coherent signals generated by linking up to 16 vector PSGs

www.keysight.com/find/E8267D



PSG microwave signal generator E8257D analog

- Meet test system needs across a wide range: 20, 31.8, 40, 50 and 67 GHz models available (add frequency extender modules to cover up to 1.1 THz)
- Test high-power devices and overcome test system losses with options capable of generating more than 1 W (+30 dBm) of output power
- Address the demanding needs of Doppler radar, ADC and receiver-blocking tests with the PSG's extremely low phase noise: -91 dBc/Hz at 100 Hz offset and -126 dBc/Hz at 10 kHz offset (10 GHz)
- Test your DUT with the highest quality signals: the PSG combines metrology-grade frequency and level accuracy with excellent distortion and spurious characteristics

www.keysight.com/find/E8257D

Key specifications	E8267D MW vector	E8257D MW analog
Frequency range (min. to max.)	100 kHz to 44 GHz	100 kHz to 70 GHz
Frequency switching	9 ms	9 ms
Output power (at 20 GHz)	+22 dBm	+26 dBm
Level accuracy	± 0.6 dB	± 0.6 dB
SSB phase noise (10 GHz; 10 kHz offset)	-126 dBc/Hz	-126 dBc/Hz
Harmonics	-55 dBc	-55 dBc
EVM (QPSK)	0.8%	N/A
ACPR (16 QAM)	-64 dBc	N/A
Internal baseband generator RF BW	80 MHz	N/A

PSG Signal Generator (continued)



PSG RF signal generator E8663D analog

The E8663D PSG RF analog signal generator provides the industry's lowest phase noise in a commercially-available signal generator. With optional analog modulation (AM, FM, θ M and pulse) capability, superior level accuracy and high output power, the E8663D is the right choice for demanding applications such as radar system development, satellite communications evaluation, or when a very low noise local oscillator or reference signal is needed. Built on the outstanding legacy of the 8663A, the E8663D delivers improved performance and is fully code compatible with its predecessor for seamless upgrades to existing test systems. Enhanced narrow pulse modulation and extended support life are optionally available.

www.keysight.com/find/E8663D

Key specifications	
Frequency range (min. to max.)	100 kHz to 9 GHz
Frequency switching	9 ms
Output power	+23 dBm
Level accuracy	± 0.6 dB
SSB phase noise (1 GHz; 10 kHz offset)	-143 dBc/Hz
Harmonics	-55 dBc

Millimeter Wave Accessories for the PSG Signal Generator

Millimeter wave sources are essential instruments for developing almost all millimeter-wave systems. Easily extend the frequency range of your E8257D or E8267D PSG signal generators with these multiplier modules from select partners.

Millimeter-wave source modules from OML, Inc.

The E8257DSxx-Series of external, high-power, frequency banded millimeter-wave source modules provide synthesized frequency performance, millimeter-wave test signals for waveguide bands from 50 to 500 GHz.



Signal generator frequency extension modules from VDI, Inc.

The E8257DVxx-Series of signal generator frequency extension modules provide high power, synthesized frequency performance millimeter-wave test signals for waveguide bands from 50 GHz to 1.1 THz.



www.keysight.com/find/sg_mmwave

X-Series Signal Generators

Crafted to create signals capable of testing your very best devices and designs, the X-Series signal generators offer industry-leading performance and low cost of ownership. A proven, scalable platform combined with cost-effective calibration and internal diagnostics allows you to buy the capabilities you need today and easily upgrade to meet future requirements.



N5183B analog MXG microwave signal generator

The MXG is the pure and precise alternative to the analog PSG, with advantages in size and speed. It delivers the performance you need to perform module- and system-level testing—fast—in only two rack units.

- Meet test system needs up to 13, 20, 31.8, or 40 GHz
- Address demanding tests of radar modules and systems with best-in-class phase noise of ≤ 124 dBc/Hz (10 kHz offset) with -75 dBc spurious (at 10 GHz)
- Save space and maintain test rigor with near-PSG performance levels in just two rack units
- Accelerate your calibration process with best-in-class switching speed of less than 600 μ s

www.keysight.com/find/N5183B



N5173B analog EXG microwave signal generator

The EXG is the cost-effective choice when you need to balance budget and performance. In just two rack units, it provides the essential signals that address parametric testing of broadband filters, amplifiers, receivers, and more.

- Perform basic LO upconversion or CW blocking with low cost coverage to 13, 20, 31.8, or 40 GHz
- Characterize broadband microwave components such as filters and amplifiers with the best combination of output power (+20 dBm at 20 GHz), low harmonics (≤ 55 dBc), and full step attenuation
- Use as a high-stability system reference with standard high-performance OCXO at an aging rate of less than $\pm 5 \times 10^{-10}$ parts per day
- Shrink your test stand with optional integrated multi-function generator and USB power sensor interface

www.keysight.com/find/N5173B

Key specifications	MXG microwave analog N5183B	EXG microwave analog N5173B
Frequency range (min. to max.)	9 Hz to 40 GHz	9 Hz to 40 GHz
Frequency switching	600 μ s	600 μ s
Output power (20 GHz)	+20 dBm	+ 20 dBm
Level accuracy (10 GHz)	± 0.7 dB	± 0.7 dB
SSB phase noise (10 GHz)	-124 dBc/Hz	-101 dBc/Hz
Harmonics (10 GHz)	-55 dBc	-55 dBc

X-Series Signal Generators (continued)



MXG RF signal generators N5182B vector and N5181B analog

To help you reach better performance, the MXG X-Series vector and analog signal generators are fine-tuned to be your “golden transmitter” in R&D. Whether you’re pushing for a linear RF chain or an optimized link budget, the MXG delivers what you need: phase noise, ACPR, channel coding, and much more. Reveal the true performance of your devices and test your designs within and beyond their limits with the MXG.

- Test radar receiver sensitivity or characterize ADC with industry-leading phase noise
- Characterize nonlinear PA behavior with industry-leading ACPR and output power
- Test 802.11ac with < 0.4% EVM, or characterize multi-carrier PAs with < ± 0.2 dB flatness across 160 MHz bandwidth
- Go beyond standard application requirements with sophisticated real-time and waveform-based Signal Studio software

www.keysight.com/find/N5182B
www.keysight.com/find/N5181B



EXG RF signal generators N5172B vector and N5171B analog

To help you achieve faster throughput and greater uptime, the cost-effective EXG X-Series signal generators are optimized for manufacturing test. With analog and vector models, the EXG provides the signals you’ll need for basic parameter testing of components and functional verification of receivers. Get “just enough” test at the right price with the EXG.

- Maximize test margins on the production line with industry-leading ACPR
- Maximize throughput with < 800 μs simultaneous switching of frequency, power and waveform type
- Enable rapid, accurate tests using Signal Studio’s predefined, standards-based waveforms
- Shrink your test stand with two rack-unit height and integrated multi-function generator and USB power sensor interface

www.keysight.com/find/N5172B
www.keysight.com/find/N5171B

Key specifications	MXG RF vector N5182B	MXG RF analog N5181B	EXG RF vector N5172B	EXG RF analog N5171B
Frequency range (min. to max.)	9 kHz to 6 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz
Frequency switching	800 μs	800 μs	800 μs	800 μs
Output power	+24 dBm	+24 dBm	+21 dBm	+21 dBm
Level accuracy	± 0.6 dB	± 0.6 dB	± 0.6 dB	± 0.6 dB
SSB phase noise (1 GHz; 20 kHz offset)	-146 dBc/Hz	-146 dBc/Hz	-122 dBc/Hz	-122 dBc/Hz
Harmonics	-35 dBc	-35 dBc	-35 dBc	-35 dBc
EVM (LTE)	0.2%	N/A	0.2%	N/A
ACPR (3GPP W-CDMA TM1 64 DPCH)	-73 dBc	N/A	-73 dBc	N/A
Internal baseband generator RF BW	160 MHz	N/A	120 MHz	N/A

RF Analog Signal Generator



RF signal generator N9310A analog

The N9310A is a general-purpose RF signal generator covering a frequency range from 9 kHz to 3 GHz. With a low price, reliable performance, and multiple built-in functions, it's well-suited for manufacturing, education, and service maintenance.

While you may occasionally need a full-function and high-performance signal generator, many times you only need a simple continuous wave (CW) source. For this application, the N9310A RF signal generator is ideal. When you need the solution that provides just enough functionality at the lowest price select the N9310A RF signal generator.


- Optimized for low-cost consumer electronics manufacturing test, education and service and repair
- Optional I/Q modulator 40 MHz bandwidth (ext. I/Q inputs only)
- USB interface, with flash memory support

www.keysight.com/find/N9310A

Key specifications

Frequency range (min. to max.)	9 kHz to 3 GHz
Frequency switching	10 ms
Output power	+13 dBm
Level accuracy	± 1.0 dB
SSB phase noise (1 GHz; 20 kHz offset)	-95 dBc/Hz
Harmonics	-30 dBc

Baseband Generator and Interface Module

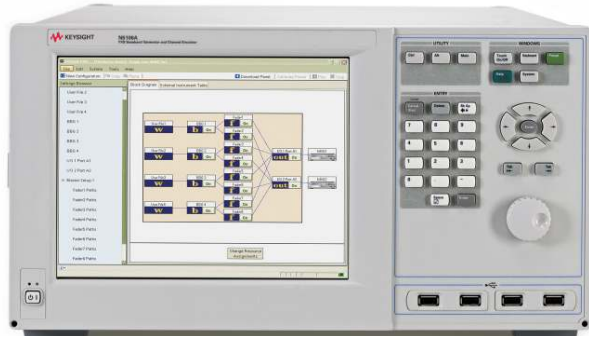

PXB baseband generator and channel emulator N5106A

The PXB lets you customize test cases and validate designs under real-world conditions with the broadest range of test parameters. Create fully-parameterized signals for established and evolving standards with Keysight Signal Studio. In addition, the PXB lets you model the signal-propagation environment with fully-parameterized, real-time channel emulation (fading). With the largest playback memory available, you can run longer test sequences to better approximate real-world signals. You can also capture signals up to 512 Msa from your own device for post processing.

With less instrumentation to manage, the PXB simplifies test setup. You need only one box for multi-format baseband generation, real-time fading and signal capture. With it, you can construct over 20 configurations to meet your test needs. These configurations, along with external instrument connections, can be redefined in seconds using the PXB user interface.

- Up to 160 MHz modulation and signal capture bandwidth
- 512 Msa playback and signal capture memory per channel
- Up to six BBGs and 16 faders for interference, diversity and MIMO test

www.keysight.com/find/N5106A



Digital signal interface module N5102A

The N5102A digital signal interface module provides fast and flexible digital inputs and outputs for the MXG and EXG X-Series vector signal generators, E8267D PSG vector signal generator and N5106A PXB baseband generator and channel emulator. In output mode, you can deliver realistic complex-modulated signals such as LTE, HSPA, W-CDMA, GPS, WLAN, digital video, custom pulses and many others directly to your digital devices and subsystems. In the input mode, the interface module ports your digital input to the signal generator's baseband system, providing a quick and easy way of upconverting to calibrated analog IF, RF or μ W frequencies.

In both operating modes, the interface module adapts to your device with the logic type, data format, clock features, and signaling you require. With its 3-meter extension cable and a selection of connector types, the interface module connects easily to your device, in most cases eliminating the need for custom fixtures.

- Up to 400 MHz in serial mode, 200 MHz in parallel mode
- Provision for internal, external, or device clocking
- Independent data input and output rates; adjustable clock phase and skew

www.keysight.com/find/N5102A

PXI Signal Generators



PXIe vector signal generator M9381A

The PXI vector signal generator provides a combination of speed, performance and multi-channel capability needed for automated test environments. Measurement consistency with bench top instruments is enabled through a suite of common software applications.

- Fast switching times— < 240 μ s from its programming interface and < 10 μ s in list mode using an exclusive baseband tuning technology innovation for switching power and frequency
- Better linearity, repeatability and resolution further reduce the test time
- +18 dBm specified output power across the frequency range, excellent modulation quality—particularly at high output power levels

Up to 160 MHz modulation bandwidth (\pm 0.3 dB flatness)

www.keysight.com/find/M9381A



PXIe CW source M9380A

With high-power levels and accurate measurements, the Keysight M9380A CW source is a configuration without the digital vector modulator module. The Keysight M9018A all-hybrid 18-slot PXIe chassis and M9036A PXIe embedded controller are ideal to complete both configurations.

www.keysight.com/find/M9380A

Keysight Quality and Support in PXI

Keep measurement quality while reducing your cost of ownership with Keysight's unique RF modular calibration and fast core exchange strategy. Keysight PXI signal generators are factory calibrated, shipped with ISO-9002, NIST traceable Cal certificate, and include a 3-year warranty.

www.keysight.com/find/pxi-vsg

Key specifications	M9381A PXIe vector	M9380A PXIe CW source
Frequency range (min. to max.)	1 MHz to 6 GHz	1 MHz to 6 GHz
Frequency switching	< 10 to 240 μ s	5 ms
Output power (at 1 GHz)	+19 dBm	+19 dBm
Level accuracy	\pm 0.4 to 1 dB	\pm 0.4 to 1 dB
SSB phase noise (1 GHz; 20 kHz offset)	-122 dBc/Hz	-122 dBc/Hz
Harmonics	< -34 dBc	< -29 dBc
EVM (LTE)	0.32%	N/A
ACPR (3GPP W-CDMA TM1 64 DPCH)	-70 dBc	N/A
Internal baseband generator RF BW	160 MHz	N/A

PXI Signal Generators (continued)



PXI local oscillator M9302A

The M9302A PXI local oscillator (LO) is optimized for fast settling time to allow for fast frequency down conversion in aerospace and defense applications, such as radar and wideband signal capture, and in wireless communications applications. The M9302A is a two-slot 3U PXI VCO-based 3 GHz to 10 GHz LO. The fast switching time and low phase noise of this LO make it an ideal component of a microwave vector signal analyzer. When integrated in the Keysight M9392A PXI vector signal analyzer, then combined with 89600 VSA software, the M9302A provides a complete signal analyzer solution enabling analysis of communications, radar and avionics signals to 26.5 GHz in a modular open-system standard.

- ± 0.5 ppm frequency temperature stability (0 to 50 °C)
- 0.1 Hz tuning resolution
- PXI 2-slot 3U


www.keysight.com/find/M9302A

Key specifications

Frequency range (min. to max.)	3 to 10 GHz
Frequency switching	1 ms
Output power	+16 dBm
Level accuracy	± 2 dB
SSB phase noise (10 GHz; 10 kHz offset)	-115 dBc/Hz
Harmonics	-20 dBc

Migrating from Legacy Signal Generators

Carefully planned instrument migration and modernization can maximize your test-system efficiency, performance, and readiness, while minimizing risk and potential disruptions, keeping you at the leading edge in the competitive marketplace. The Keysight PSG and X-Series signal generators are designed as evolutionary replacements to their in-class predecessors. Take advantage of their performance, flexibility, speed and modern connectivity in replacing legacy Keysight signal generators.

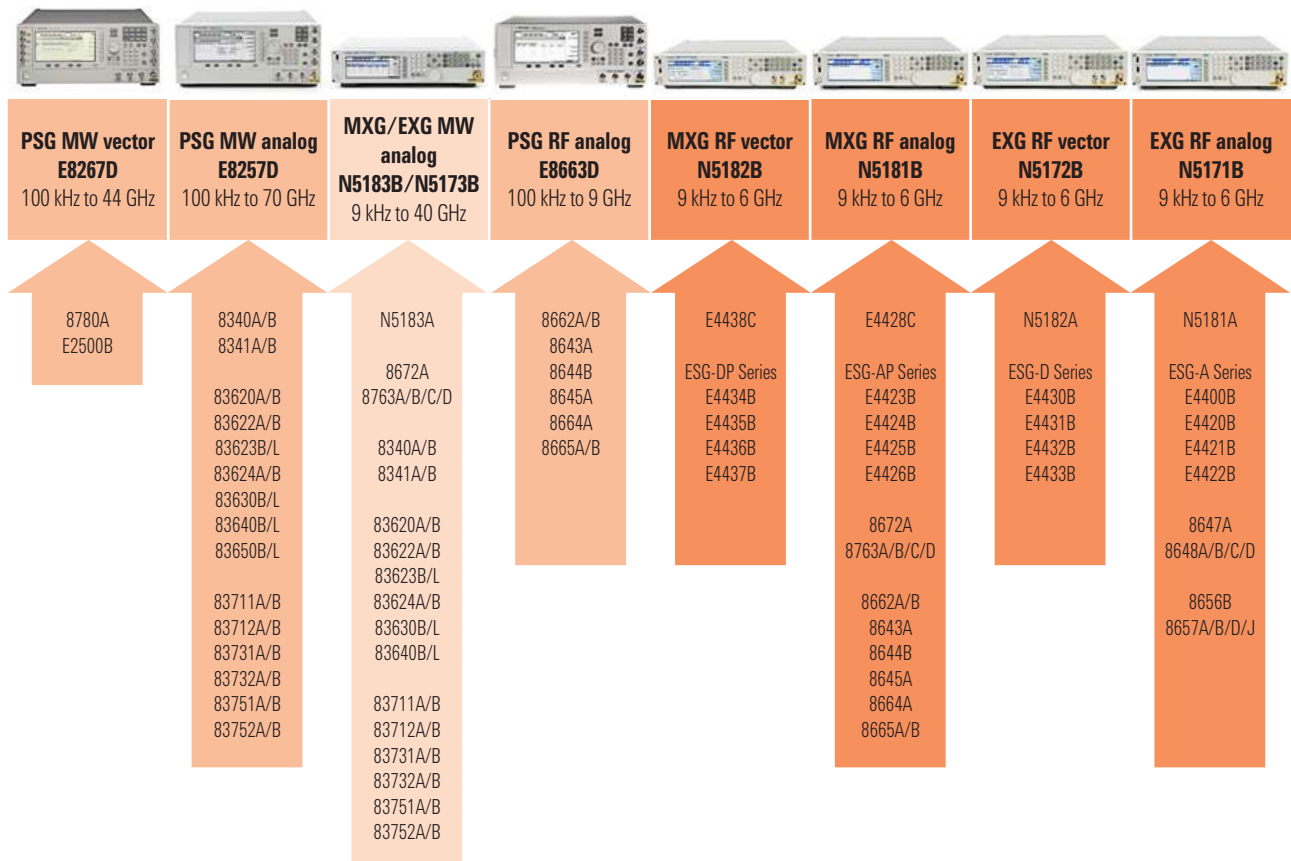

Migrate to the X-Series RF Signal Generators
www.keysight.com/find/X-Series_SG_Migration

Migrate to Microwave Signal Generators
www.keysight.com/find/Microwave_SigGen_Migration

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000® is a registered certification mark of the Telecommunications Industry Association. Used under license.

WiMAX™ is a trademark of the WiMAX Forum®.

Bluetooth® and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc, U.S.A. and licensed to Keysight Technologies, Inc.

www.keysight.com/find/sg

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

