

RECEIVED 23 FEB 2030

ARTESYN
 SCHMATIC
 POWER SUPPLY
 NFS90-7630L

REV	ECO	DESCRIPTION	DATE	APP'D.
1		ISSUED FOR PRODUCTION	12/1/73	W.S.
2		REVISION TO SCHEMATIC	1/27/74	W.S.
3		REVISION TO SCHEMATIC	5/7/74	W.S.
4		REVISION TO SCHEMATIC	9/27/74	W.S.
5		REVISION TO SCHEMATIC	9/27/74	W.S.
6		REVISION TO SCHEMATIC	4/1/75	W.S.
7		REVISION TO SCHEMATIC	7/12/75	W.S.
8		REVISION TO SCHEMATIC	7/29/75	W.S.
9		REVISION TO SCHEMATIC	8/27/75	W.S.
10		REVISION TO SCHEMATIC	8/27/75	W.S.
11		REVISION TO SCHEMATIC	8/27/75	W.S.
12		REVISION TO SCHEMATIC	8/27/75	W.S.
13		REVISION TO SCHEMATIC	8/27/75	W.S.
14		REVISION TO SCHEMATIC	8/27/75	W.S.

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 FRACTIONS DECIMALS
 .010 .005
 .015 .005
 .020 .005
 .030 .005
 .040 .005
 .050 .005
 .060 .005
 .070 .005
 .080 .005
 .090 .005
 .100 .005
 .125 .005
 .150 .005
 .175 .005
 .200 .005
 .250 .005
 .300 .005
 .375 .005
 .500 .005
 .625 .005
 .750 .005
 .875 .005
 1.000 .005
 1.125 .005
 1.250 .005
 1.375 .005
 1.500 .005
 1.625 .005
 1.750 .005
 1.875 .005
 2.000 .005
 2.125 .005
 2.250 .005
 2.375 .005
 2.500 .005
 2.625 .005
 2.750 .005
 2.875 .005
 3.000 .005
 3.125 .005
 3.250 .005
 3.375 .005
 3.500 .005
 3.625 .005
 3.750 .005
 3.875 .005
 4.000 .005
 4.125 .005
 4.250 .005
 4.375 .005
 4.500 .005
 4.625 .005
 4.750 .005
 4.875 .005
 5.000 .005
 5.125 .005
 5.250 .005
 5.375 .005
 5.500 .005
 5.625 .005
 5.750 .005
 5.875 .005
 6.000 .005
 6.125 .005
 6.250 .005
 6.375 .005
 6.500 .005
 6.625 .005
 6.750 .005
 6.875 .005
 7.000 .005
 7.125 .005
 7.250 .005
 7.375 .005
 7.500 .005
 7.625 .005
 7.750 .005
 7.875 .005
 8.000 .005
 8.125 .005
 8.250 .005
 8.375 .005
 8.500 .005
 8.625 .005
 8.750 .005
 8.875 .005
 9.000 .005
 9.125 .005
 9.250 .005
 9.375 .005
 9.500 .005
 9.625 .005
 9.750 .005
 9.875 .005
 10.000 .005

DO NOT SCALE DRAWING
 THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF ARTESYN, INC. REPRODUCTION OF THIS DOCUMENT IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF ARTESYN, INC. IS PROHIBITED.

CAD GENERATED
 DIMENSIONS DO NOT
 ALTER MANUALLY

REV	ECO	DESCRIPTION	DATE	APP'D.
14				
13				
12				
11				
10				
9				
8				
7				
6				
5				
4				
3				
2				
1				


LAST USED
 NOT USED

700227-001
 NFS90-7630L
 MODEL NO.

FOR SCHEMATIC SEE DWG. NO.
 R19 CAN BE S.A.T.

ALL DIODES ARE IN4448
 ALL CAPACITANCE VALUES ARE IN MICROFARADS.
 ALL VOLTAGES IN D.C.
 ALL RESISTANCE VALUES ARE IN OHMS, 1/4W, 5%.

NOTES: UNLESS OTHERWISE SPECIFIED

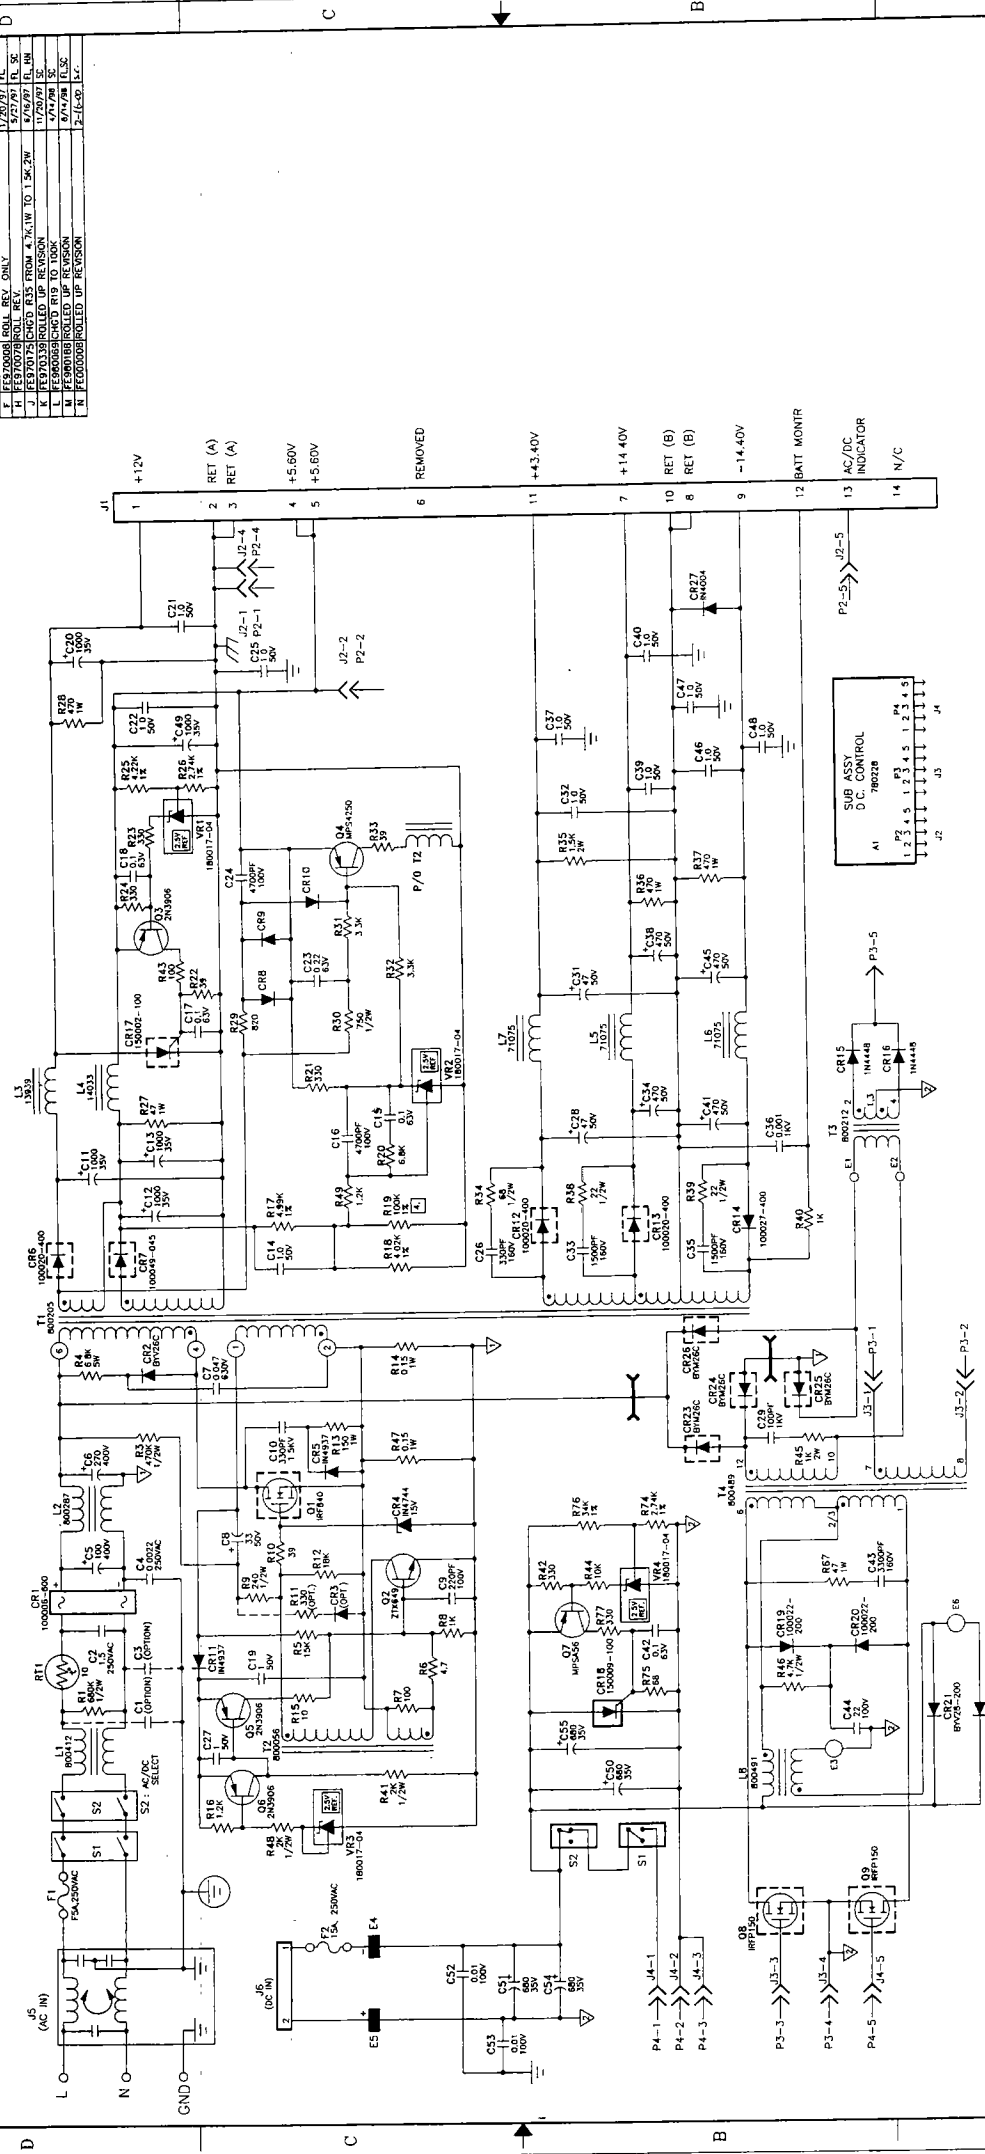

REV	ECO	DESCRIPTION	DATE	APP'D.
1		ISSUED FOR PRODUCTION	12/1/73	W.S.
2		REVISION TO SCHEMATIC	1/27/74	W.S.
3		REVISION TO SCHEMATIC	5/7/74	W.S.
4		REVISION TO SCHEMATIC	9/27/74	W.S.
5		REVISION TO SCHEMATIC	9/27/74	W.S.
6		REVISION TO SCHEMATIC	4/1/75	W.S.
7		REVISION TO SCHEMATIC	7/12/75	W.S.
8		REVISION TO SCHEMATIC	7/29/75	W.S.
9		REVISION TO SCHEMATIC	8/27/75	W.S.
10		REVISION TO SCHEMATIC	8/27/75	W.S.
11		REVISION TO SCHEMATIC	8/27/75	W.S.
12		REVISION TO SCHEMATIC	8/27/75	W.S.
13		REVISION TO SCHEMATIC	8/27/75	W.S.
14		REVISION TO SCHEMATIC	8/27/75	W.S.

1
 2
 3
 4
 5
 6
 7
 B