


# Keysight N5264A Measurement Receiver

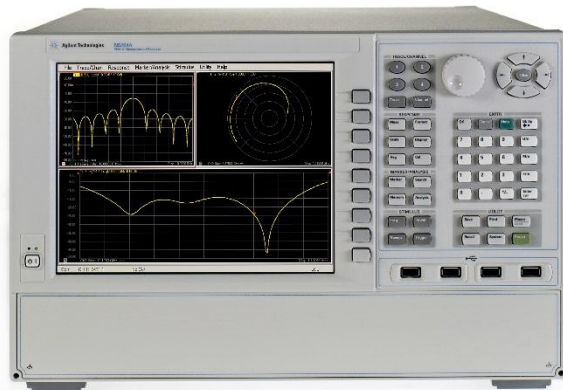

Technical  
Specifications  
and Data Sheet

## Contents

Table 1. Key Specifications .....	3
Table 2. Measurement Throughput Summary.....	4
Table 3. Rear Panel Information .....	7
Table 4. Front Panel Information .....	13
Table 5. Analyzer Dimensions and Weight .....	14

## Definitions

All specifications and characteristics apply over a 25 °C ±5 °C range (unless otherwise stated) and 90 minutes after the instrument has been turned on.

**Specification (spec.):** Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

**Characteristic (char.):** A performance parameter that the product is expected to meet before it leaves the factory, but that is not verified in the field and is not covered by the product warranty. A characteristic includes the same guardbands as a specification.

**Typical (typ.):** Expected performance of an average unit which does not include guardbands. It is not covered by the product warranty.

**Nominal (nom.):** A general, descriptive term that does not imply a level of performance. It is not covered by the product warranty.

**Calibration:** The process of measuring known standards to characterize a network analyzer's systematic (repeatable) errors.

**Corrected (residual):** Indicates performance after error correction (calibration). It is determined by the quality of calibration standards and how well "known" they are, plus system repeatability, stability, and noise.

**Uncorrected (raw):** Indicates instrument performance without error correction. The uncorrected performance affects the stability of a calibration.

**Standard:** When referring to the analyzer, this includes no options unless noted otherwise.

**Table 1. Key Specifications**

<b>Description</b>	<b>Specifications</b>
Measurement Speed (max) points/sec @ 600 KHz IFBW, CW frequency	400,000 points/sec <sup>1</sup>
Receiver Inputs	5 (simultaneously)
Measurement Receivers	5 (simultaneously)
Data Buffer Size	4 billion bytes
Data Buffer size (max. points for single cut)	500 million points <sup>2</sup>
IF Bandwidth	1 Hz to 5 MHz
Frequency Source Control Interface	TLL hand shake
Trigger In / Out	Three pairs
Host Computer Interface	Ethernet, USB and GPIB
Security	Hard drive removable

<sup>1</sup> Fast CW mode - no point triggering.

<sup>2</sup> For single parameter; two parameters are 250 million points each.

## Table 2. Measurement Throughput Summary

### Typical Cycle Time<sup>1, 2</sup> (ms) for Measurement Completion

Description	Typical Performance (time/point in millisecond)			
Number of Points	CW 10 GHz (no band crossings), 801 points			
Trigger Mode	Hardware			
IF Bandwidth	600 kHz	100 kHz	10 kHz	1 kHz
RF = MXG, N5183A opt. UNZ, Fast switching LO = MXG, N5183A opt. UNZ, Fast switching	0.070	0.075	0.185	1.00
RF = MXG, N5183A opt. UNZ, Fast switching LO = N5264A opt. 108 <sup>3</sup>	0.070	0.075	0.185	1.00
RF = MXG, N5183A opt. UNZ, Fast switching LO = PSG	0.350	0.350	0.450	0.250
RF = MXG, N5183A opt. UNZ, Fast switching LO = 83623B	0.900	0.900	1.00	1.800

Description	Typical Performance (time/point in millisecond)			
Number of Points	801	1601		
Trigger Mode	Hardware		Sensitivity(dBm) <sup>4</sup>	
<b>Start 2 GHz, Stop 18 GHz, 1 MHz IF bandwidth (with band crossings)</b>				
RF = MXG, N5183A opt. UNZ, Fast switching LO = MXG, N5183A opt. UNZ, Fast switching	0.580	0.580	-90.5 dBm, 2 – 3 GHz - 94.5 dBm, 3 – 12.5 GHz - 83 dBm, 12.5 – 18 GHz	
RF = MXG, N5183A opt. UNZ, Fast switching LO = N5264A opt. 108 <sup>3</sup>	0.580	0.580	-85.5 dBm, 2 – 3 GHz - 90.5 dBm, 3 – 12.5 GHz - 81 dBm, 12.5 – 18 GHz	
<b>Start 2 GHz, Stop 18 GHz, 600 kHz IF bandwidth (with band crossings)</b>				
RF = MXG, N5183A opt. UNZ, Fast switching LO = MXG, N5183A opt. UNZ, Fast switching	0.580	0.580	-92.5 dBm, 2 – 3 GHz - 96.5 dBm, 3 – 12.5 GHz - 85 dBm, 12.5 – 18 GHz	
RF = MXG, N5183A opt. UNZ, Fast switching LO = N5264A opt. 108 <sup>3</sup>	0.580	0.580	-85.5 dBm, 2 – 3 GHz - 92.5 dBm, 3 – 12.5 GHz - 83 dBm, 12.5 – 18 GHz	

Typical Cycle Time<sup>1, 2</sup> (ms) for Measurement Completion (Cont.)

<b>Description</b>	<b>Typical Performance (time/point in millisecond)</b>		
Number of Points	801	1601	
<b>Trigger Mode</b>	<b>Hardware</b>		<b>Sensitivity(dBm)<sup>2</sup></b>
<b>Start 2 GHz, Stop 18 GHz, 10 kHz IF bandwidth (with band crossings)</b>			
RF = MXG, N5183A opt. UNZ, Fast switching LO = MXG, N5183A opt. UNZ, Fast switching	0.730	0.730	-110.5 dBm, 2 - 3 GHz - 114.5 dBm, 3 -12.5 GHz - 103 dBm, 12.5 - 18 GHz
RF = MXG, N5183A opt. UNZ, Fast switching LO = N5264A opt. 108 <sup>3</sup>	0.730	0.730	-103.5 dBm, 2 - 3 GHz - 110.5 dBm, 3 -12.5 GHz - 101 dBm, 12.5 -18 GHz
RF = MXG, N5183A opt. UNZ, Fast switching LO = PSG E8267D opt. 520, UNX	9.50	9.50	-110.25 dBm, 2 - 3 GHz - 112.50 dBm, 3 -12.5 GHz - 96.50 dBm, 12.5 - 18 GHz
RF = MXG, N5183A opt. UNZ, Fast switching LO = 83623B	7.80	--	-108.5 dBm, 2 - 3 GHz - 113.0 dBm, 3 -12.5 GHz - 96.0 dBm, 12.5 -18 GHz
<b>Start 2 GHz, Stop 18 GHz, 1 kHz IF bandwidth (with band crossings)</b>			
RF = MXG, N5183A opt. UNZ, Fast switching LO = MXG, N5183A opt. UNZ, Fast switching	1.5	1.5	-120.5 dBm, 2 - 3 GHz - 124.5 dBm, 3 -12.5 GHz - 113 dBm, 12.5 - 18 GHz
RF = MXG, N5183A opt. UNZ, Fast switching LO = N5264A opt. 108 <sup>3</sup>	1.5	1.5	-113.5 dBm, 2 - 3 GHz - 120.5 dBm, 3 -12.5 GHz - 111 dBm, 12.5 - 18 GHz
<b>Option 118 Fast-CW mode (CW frequency)</b>			
	<b>Number of Points per Second (#pt/Sec)</b>		<b>External Trigger</b>
C.W, 7.0 GHz, ≥1 MHz IF bandwidth	--		400,000
C.W, 7.0 GHz, 600 KHz IF bandwidth	Up to 400,000		240,000
C.W, 7.0 GHz, 10 KHz IF bandwidth	Up to 8,200		7,000
C.W, 7.0 GHz, 1 KHz IF bandwidth	Up to 1,000		1,000

## Data Transfer Time (ms)

Description	Typical Performance			
	Number of Points			
	201	401	1601	16,001
<b>SCPI over GPIB</b>				
<i>Program executed on external PC <sup>5</sup></i>				
32-bit floating point	5.6	10.5	39.9	400
64-bit floating point	10.5	20.3	79.2	788
ASCII	46	92.5	370	3702
<b>SCPI over SICT/LAN or TCP/IP Socket</b>				
<i>Program executed in the analyzer</i>				
32-bit floating point	0.18	0.21	0.5	3.6
64-bit floating point	0.22	0.28	0.62	5.3
ASCII	6.3	12.3	47.3	470
<b>COM<sup>6</sup></b>				
<i>Program executed in the analyzer</i>				
32-bit floating point	<0.15	0.15	0.2	0.7
Variant type	0.75	1.2	4.5	50
<b>DCOM over LAN<sup>6</sup></b>				
<i>Program executed on external PC</i>				
32-bit floating point	<1.0	1.2	2.1	13
Variant type	2.7	4.5	15	150

<sup>1</sup> Includes sweep time, retrace time and band-crossing time. Analyzer display turned on. Minus 21 ms from total time for display off with DISPLAY:ENABLE OFF. Data for two traces (A & B receiver) per measurement.

<sup>2</sup> After first complete sweep.

<sup>3</sup> When configuring the N5264A Option 108 as the LO source, you may improve system measurement sensitivity by using a method of AM noise suppression.

<sup>4</sup> Performance Characteristics when connected with 85309A and 85320A/B mixers - system noise floor + conversion gain.

<sup>5</sup> Measured when using the SCPI command DISPlay: VISible OFF.

<sup>6</sup> Values are for real and imaginary pairs, with the analyzer display off.

**Table 3. Rear Panel Information**

<b>External IF Inputs</b>	
<b>Description</b>	<b>Typical Performance</b>
Function	Allows use of external IF signals from remote mixers or frequency converters
Connectors	SMA (female); A, B, C, D, R
Input Frequency	7.438017 MHz (See IF Input Frequencies below.)
Input Impedance	50 $\Omega$
RF Damage Level	+23 dBm
DC Damage Level	1 VDC
0.1 dB Compression Point	-9.0 dBm
<i>Compression @ -10 dBm</i>	
Magnitude	0.03 dB
Phase	0.23°
Noise Floor	
10 Hz IF BW	-143 dBm
10KHz IF BW	-113 dBm
Crosstalk	-134 dB <sup>1</sup>
Dynamic Range @ 10 Hz	134 dB @ 0.1dB compression to noise floor
<b>Dynamic Accuracy</b>	
<i>-40 dBm reference, over range set by compression and noise floor @ IF Frequencies</i>	
-10dBm	0.037 dB
-20dBm	0.024 dB
-30dBm	0.016 dB
-40dBm	0.010 dB
-50dBm	0.013 dB
-60dBm	0.021 dB
-70dBm	0.032 dB

## IF Input Frequencies

The IF Input frequencies are different depending on the DSP Version.

### With DSP Version 4:

- RF or Transmitting frequency < 53 MHz: IF = 2.535211 MHz [ $3 \times (60e6 / 71)$ ]
- RF or Transmitting frequency  $\geq$  53 MHz: IF = 7.605634 MHz [ $9 \times (60e6 / 71)$ ]

With DSP Version 5, the IF frequency is dependent on the RF or Transmitting frequency AND the current IFBW setting:

- All RF or Transmitting frequency; IF Bandwidth  $\geq$  1MHz

IFBW Setting	IF Frequency
1 MHz	7.692 MHz
1.5 MHz	7.368 MHz
2 MHz	8.450 MHz
3 MHz	8.163 MHz
5 MHz	6.897 MHz
7 MHz	10.53 MHz
10 MHz	15.38 MHz
15 MHz	22.22 MHz

- IF Bandwidth  $\leq$  600 kHz:
  - RF or Transmitting frequency < 53 MHz; IF = 2.479339 MHz [ $(3 \times (100e6 / 121))$ ]
  - RF or Transmitting frequency  $\geq$  53 MHz; IF = 7.438017 MHz [ $(9 \times (100e6 / 121))$ ]

### Manually change the IF frequency

The IF frequency can be changed to any value between +14.9999 MHz and -14.9999 MHz using SENS:IF:FREQ (SCPI) or IFFrequency (COM) commands.

- With DSP Version 4 - 34 and above, min and max IF frequencies up to +/- 20.1 MHz are available.
- With DSP Version 5, min and max IF frequencies up to +/- 38 MHz are available.
- Performance is degraded drastically above +/- 14.9999 MHz.



<b>External IF Inputs (Cont.)</b>	
<b>Description</b>	<b>Typical Performance</b>
<b>Dynamic Accuracy (Cont.)</b>	
<i>-40 dBm reference, over range set by compression and noise floor @ IF Frequencies</i>	
-80dBm	0.041 dB
-90dBm	0.049 dB
-100dBm	0.057 dB
-110dBm	0.072 dB
-120dBm	0.188 dB
<b>LO output <sup>2</sup> (Option 108)</b>	
<b>Description</b>	<b>Specification</b>
Frequency Stability	+/- 0.05 ppm, -10 to 70C, +/- 0.1ppm/yr max
Frequency Accuracy	+/- 1 ppm
<b>Description</b>	<b>Typical Performance</b>
Frequency Range	10 MHz to 26.5 GHz
<b>Frequency Switching Speed<sup>3</sup></b>	< 100 microsecond/point
Frequency Resolution	1 Hz
Power Flatness	+/- 1.0 dB
Power Output	+10 dBm
<b>2<sup>nd</sup> Harmonics<sup>4</sup></b>	
20 MHz to 2.0 GHz	-23 dBc
2.0 GHz to 5.0 GHz	-28 dBc
5.0 GHz to 23.0 GHz	-35 dBc
23.0 GHz to 26.5 GHz	-27 dBc

## LO output <sup>2</sup> (Option 108)

Description	Typical Performance			
<b>3<sup>rd</sup> Harmonics<sup>3</sup></b>				
30 MHz to 8.0 GHz	-32 dBc			
8.0 GHz to 15.0 GHz	-38 dBc			
15.0 GHz to 26.5.0 GHz	-48 dBc			
<b>Phase Noise</b>				
	<b>1 KHz Offset</b>	<b>10 KHz Offset</b>	<b>100 KHz Offset</b>	<b>1 MHz Offset</b>
10 MHz to 500 MHz	-80 dBc/Hz	-85 dBc/Hz	-76 dBc/Hz	-113 dBc/Hz
500 MHz to 1 GHz	-90 dBc/Hz	-110 dBc/Hz	-106 dBc/Hz	-115 dBc/Hz
1 GHz to 2 GHz	-85 dBc/Hz	-105 dBc/Hz	-101 dBc/Hz	-110 dBc/Hz
2 GHz to 4 GHz	-80 dBc/Hz	-100 dBc/Hz	-96 dBc/Hz	-105 dBc/Hz
4 GHz to 8 GHz	-74 dBc/Hz	-94 dBc/Hz	-90 dBc/Hz	-99 dBc/Hz
8 GHz to 16 GHz	-68 dBc/Hz	-88 dBc/Hz	-84 dBc/Hz	-93 dBc/Hz
16 GHz to 26.5 GHz	-62 dBc/Hz	-82 dBc/Hz	-78 dBc/Hz	-87 dBc/Hz

## 10 MHz Reference

<b>10 MHz Reference In</b>	
Connector	BNC, female
Input Frequency	10 MHz $\pm$ 10 ppm, typical
Input Level	-15 dBm to +20 dBm, typical
Input Impedance	200 $\Omega$ , nom.
<b>10 MHz Reference Out</b>	
Connector	BNC, female
Output Frequency	10 MHz $\pm$ 1 ppm, typical
Signal Type	Sine Wave, typical
Output Level	+10 dBm $\pm$ 4 dB into 50 $\Omega$
Output Impedance	50 $\Omega$ , nominal
Harmonics	<-40 dBc, typical

## External Monitor Information

Description	Typical Performance
<b>VGA Video Output</b>	
Connector	15-pin mini D-Sub; Drives VGA compatible monitors
<b>Devices Supported:</b>	<b>Resolutions:</b>

Flat Panel (TFT)	1024 X 768, 800 X 600, 640 X 480
Flat Panel (DSTN)	800 X 600, 640 X 480
CRT Monitor	1280 X 1024, 1024 X 768, 800 X 600, 640 X 480
--	Simultaneous operation of the internal and external displays is allowed, but with 640 X 480 resolution only. If you change resolution, you can only view the external display (internal display will "white out").
Test Set IO	25-pin D-Sub connector, available for external test set control.
Power IO	9-pin D-Sub, female; analog and digital IO
Handler IO	36-pin parallel I/O port; all input/output signals are default set to negative logic; can be reset to positive logic via GPIB command.

<b>Trigger Information</b>	
<b>Description</b>	<b>Typical Performance</b>
<b>Trigger In/Meas Trigger</b>	
Nominal Input Impedance	5K Ohms
Minimum Pulse Width	1 us
DC Damage Level	5.5 volts
Drive Voltage	TTL (0, +5.0) Volts

## Trigger Information (Cont.)

Description	Typical Performance
<b>Trigger out/Meas Trigger Ready</b>	
Nominal Input Impedance	5K Ohm
Pulse Width	= Data acquisition
Polarity	Selectable with sweep or point mode
Drive Voltage	TTL (0, +5.0) Volts
Trigger Inputs/Outputs (Aux. 1 & 2)	BNC(f), TTL/CMOS compatible
GPIB (two ports - dedicated controller and dedicated talker/listener)	24-pin D-sub (Type D-24), female; compatible with IEEE-488.
Parallel Port (LPT1)	25-pin D-Sub miniature connector, female; provides connection to printers or any other parallel port peripherals
Serial Port (COM 1)	9-pin D-Sub, male; compatible with RS-232
USB Port	Four ports on front panel (all Host) and five ports (four hosts and one Device) on rear panel. Type A configuration (eight hosts) and Type B configuration (one Device), USB 2.0 compatible.
LAN	10/100BaseT Ethernet, 8-pin configuration; auto selects between the two data rates

## Line Power

Description	Typical Performance
<i>Power supply is auto switching</i>	
Frequency, Voltage	50/60 Hz for 100 240 VAC
Max	450 watts

<sup>1</sup> Measurement conditions: normalized to -10 dBm, 10 Hz IFBW, averaging factor of 8.

<sup>2</sup> Absolute LO frequency is Front Panel set frequency plus 1 IF.

<sup>3</sup> No band crossings; IFBW  $\geq$  100 kHz with 801 measurement points.

<sup>4</sup> Listed frequency is the harmonic frequency setting entered with front panel (frequency setting entered with front panel plus {IF frequency} \* {harmonic number}) at typical power.

**Table 4. Front Panel Information**

<b>Description</b>	<b>Typical Performance</b>
<b>USB 2.0 Ports</b>	
Number of ports	4
Standard	Compatible with USB 2.0
Connector	USB Type-A female
<b>Display</b>	
Size	26.3 cm (10.4 in) diagonal color active matrix LCD; 1024 (horizontal) X 768 (vertical) resolution
Refresh Rate	Vertical 60 Hz; Horizontal 46.08 kHz
Pixels	A display is considered faulty if: <ul style="list-style-type: none"> <li>○ More than 0.002% of the total pixels have a constant blue, green, red, or black appearance that will not change.</li> <li>○ Three or more consecutive pixels have a constant blue, green, red, or black appearance that will not change.</li> </ul>
<b>Display Range</b>	
Magnitude	+/-2500 dB (at 500 dB/div), max
Phase	+/-2500° (at 500 °/div), max
Polar	10 pUnits, min 10,000 Units, max
<b>Display Resolution</b>	
Magnitude	0.001 dB/div, min
Phase	0.01°/div, min
<b>Marker Resolution</b>	
Magnitude	0.001 dB, min
Phase	0.01°, min
Polar	10 pUnit, min


**Table 5. Analyzer Dimensions and Weight**

<b>Cabinet Dimensions</b>	<b>Height</b>	<b>Width</b>	<b>Depth</b>
Excluding front and rear panel hardware and feet	267 mm 10.5 in	426 mm 16.75 in	533 mm 20.97 in
Excluding front and rear panel hardware and feet. Including rack-mount flanges.	266 mm 10.5 in EIA RU <sup>1</sup> = 6	426 mm 16.75 in	558 mm 21.95 in
As shipped - including front panel connectors, rear panel bumpers, and feet.	280 mm 11.0 in	435 mm 17.1 in	558 mm 21.95 in
As shipped including rack-mount flanges	280 mm 11.0 in	483 mm 19.00 in	558 mm 21.95 in
<b>Weight</b>			
	<b>Standard</b>	<b>Option 108</b>	
Net	21 kg (45 lb), nominal	22 kg (48 lb), nominal	--
Shipping	37 kg (82 lb), nominal	38 kg (85 lb), nominal	--

<sup>1</sup> Feet removed from the N5264A.

NOTE For Regulatory and Environmental information, refer to the PNA Series Installation and Quick Start Guide, located online at <http://literature.cdn.keysight.com/litweb/pdf/E8356-90001.pdf>.

## N5264A

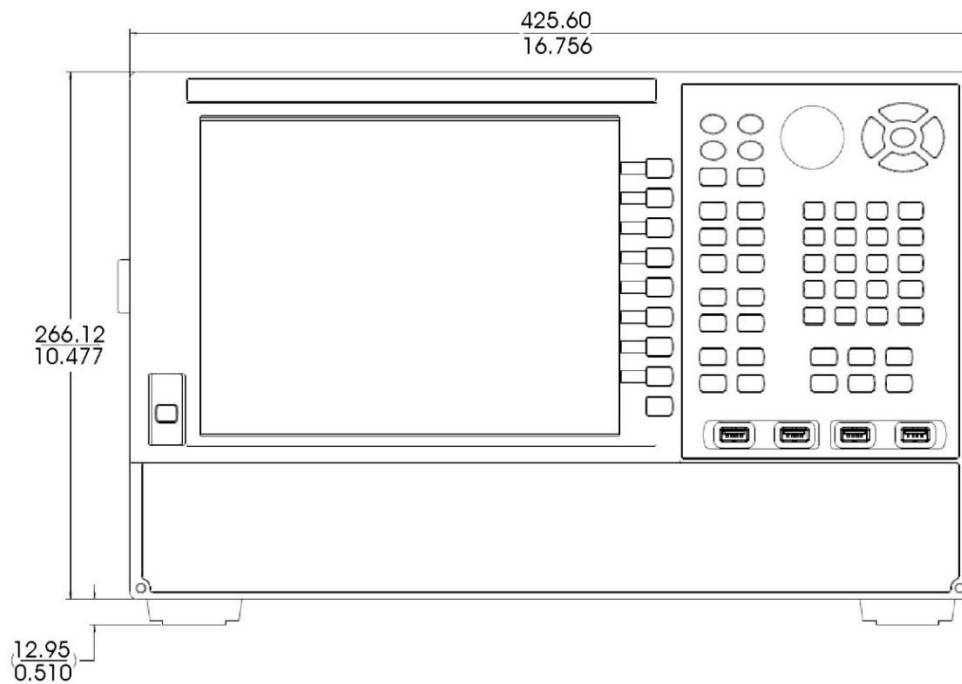

[www.keysight.com/find/myKeysight](http://www.keysight.com/find/myKeysight)

A personalized view into the information most relevant to you.



[www.axistandard.org](http://www.axistandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's combination of product reliability and three-year warranty coverage is another way we help you achieve your business goals: increased confidence in uptime, reduced cost of ownership and greater convenience.



**Keysight Assurance Plans**

**Keysight Advantage Services**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Five years of protection and no budgetary surprises to ensure your instruments are operating to specifications and you can continually rely on accurate measurements



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Electronic Measurement Group  
DEKRA Certified ISO 9001:2008  
Quality Management System

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/pnax](http://www.keysight.com/find/pnax)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894-4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829-4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

**Europe & Middle East**

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464
Ireland	6333
Israel	1890 924 204
Italy	972-3-9288-504/544
Netherlands	39 02 92 60 8 484
Spain	31 (0) 20 547 2111
Sweden	34 (91) 631 3300
United Kingdom	0200-88 22 55
	44 (0) 118 9276201

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)



This information is subject to change without notice.

© Keysight Technologies 2014

Print Date: October 20, 2014

Supersedes: September 12, 2014

**N5264-90003**

[www.keysight.com](http://www.keysight.com)