

HITACHI

KAOSIUNG HITACHI
ELECTRONICS CO.,LTD
P.O. BOX 26-27
2, 13TH EAST ST. K. E. P. Z.
KAOSIUNG TAIWAN R.O.C.
TEL:(07) 8211101(10 LINES)
TELEX: 81903 KHE
FAX:(07) 8418211

For Messrs: _____

Date: Feb.07.'95

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

LMG7380QHFC

CONTENTS

| No. | ITEM | Sheet No. | Page |
|-----|----------------------------|--|--------------------|
| 1 | COVER | 3284PS 2701-LMG7380QHFC-3 | 1-1/1 |
| 2 | RECORD OF REVISION | 3284PS 2702-LMG7380QHFC-3 | 2-1/2~2/2 |
| 3 | MECHANICAL DATA | 3284PS 2703-LMG7380QHFC-3 | 3-1/1 |
| 4 | ABSOLUTE MAXIMUM RATINGS | 3284PS 2704-LMG7380QHFC-3 | 4-1/1 |
| 5 | ELECTRICAL CHARACTERISTICS | 3284PS 2705-LMG7380QHFC-3 | 5-1/1 |
| 6 | OPTICAL CHARACTERISTICS | 3284PS 2706-LMG7380QHFC-3 | 6-1/2~2/2 |
| 7 | BLOCK DIAGRAM | 3284PS 2707-LMG7380QHFC-3 | 7-1/1 |
| 8 | INTERFACE TIMING CHART | 3284PS 2708-LMG7380QHFC-3 | 8-1/2~2/2 |
| 9 | DIMENSIONAL OUTLINE | 3283PS 2709-LMG7380QHFC-3 3284PS 2709-LMG7380QHFC-3 | 9-1/3 9-2/3~3/3 |
| 10 | APPEARANCE STANDARD | 3284PS 2710-LMG7380QHFC-3 | 10-1/5~5/5 |
| 11 | PRECAUTION IN DESIGN | 3284PS 2711-LMG7380QHFC-3 | 11-1/4~4/4 |
| 12 | DESIGNATION OF LOT MARK | 3284PS 2712-LMG7380QHFC-3 | 12-1/1 |
| 13 | PRECAUTION FOR USE | 3284PS 2713-LMG7380QHFC-3 | 13-1/1 |

Accepted by: _____

Proposed by: Y.J. Wang

Kaohsiung Hitachi
Electronics Co.,Ltd.



Sh.
No.

3284PS 2701 - LMG7380QHFC - 3

Page

1-1/1

RECORD OF REVISION
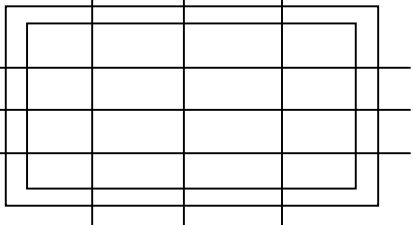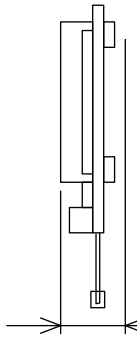
| DATE | SHEET No. | SUMMARY |
|------------|---|--|
| DEC.02.'94 | 7B64PS 2703- LMG7380QHFC-2 PAGE 3-1/1 | CHANGE: (2) 160.0*68.0*11.0 ↓ (2) 160.0*68.0*12.0 |
| | 7B64PS 2706- LMG7380QHFC-2 PAGE 6-2/2 | CHANGE: (1) VDD-V0=15.8 → 15.0V (2) Y=65 Y=128 Y=192 ↑ ↑ ↑ Y=60 Y=120 Y=180 <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">X=16←X=30</div> <div style="margin-right: 10px;">X=32←X=65</div> <div style="margin-right: 10px;">X=48←X=95</div>  </div> |
| | 7B64PS 2707- LMG7380QHFC-2 PAGE 7-1/1 | CHANGE: <div style="display: flex; flex-direction: column; align-items: center; margin-top: 10px;"> <div style="border: 1px dashed black; padding: 5px; display: flex; gap: 20px;"> <div style="border: 1px solid black; padding: 2px;">CONTROLLER</div> <div style="border: 1px solid black; padding: 2px;">TIMING</div> </div> <div style="margin: 5px 0;">↑</div> <div style="margin: 5px 0;">REVERSE</div> <div style="margin: 5px 0;">↓</div> <div style="border: 1px dashed black; padding: 5px; display: flex; gap: 20px;"> <div style="border: 1px solid black; padding: 2px;">CONTROLLER</div> <div style="border: 1px solid black; padding: 2px;">TIMING</div> </div> <div style="margin: 5px 0;">↑</div> <div style="margin: 5px 0;">REVERSE</div> </div> |
| | 7B64PS 2709- LMG7380QHFC-2 PAGE 9-1/3 | CHANGE: <div style="display: flex; align-items: center; margin-top: 10px;">  <div style="margin-left: 10px;">11.0max → 12.0</div> </div> |

RECORD OF REVISION

| DATE | SHEET No. | SUMMARY | | | | | | | | | | | | | | | | |
|---------------------|---|---|------|-----------|----------|------------|---------------------|-------------|------|-----------|----------|------------|---------------------|-------------|--------|------------------------------------|--------|------------------------------------|
| DEC.02.'94 | 7B64PS 2705- LMG7380QHFC-2 PAGE 5-1/1 | CHANGE: (1) <table style="display: inline-table; margin-right: 20px;"> <tr><td style="text-align: center;">TYP.</td><td style="text-align: center;">MAX.</td></tr> <tr><td style="text-align: center;">IDD=11.7</td><td style="text-align: center;">14.0</td></tr> <tr><td style="text-align: center;">IEE=2.5</td><td style="text-align: center;">4.0</td></tr> </table> → <table style="display: inline-table;"> <tr><td style="text-align: center;">TYP.</td><td style="text-align: center;">MAX.</td></tr> <tr><td style="text-align: center;">IDD=11.0</td><td style="text-align: center;">14.0</td></tr> <tr><td style="text-align: center;">IEE=1.9</td><td style="text-align: center;">4.0</td></tr> </table> (2) <table style="display: inline-table; margin-right: 20px;"> <tr><td style="text-align: center;">VDD-V0</td><td style="text-align: center;">TYP. (16.9) (15.8) (15.4)</td></tr> </table> → <table style="display: inline-table;"> <tr><td style="text-align: center;">VDD-V0</td><td style="text-align: center;">TYP. (16.2) (15.0) (14.6)</td></tr> </table> (3) VDD-V0=(15.8)V → (15.0)V | TYP. | MAX. | IDD=11.7 | 14.0 | IEE=2.5 | 4.0 | TYP. | MAX. | IDD=11.0 | 14.0 | IEE=1.9 | 4.0 | VDD-V0 | TYP. (16.9) (15.8) (15.4) | VDD-V0 | TYP. (16.2) (15.0) (14.6) |
| TYP. | MAX. | | | | | | | | | | | | | | | | | |
| IDD=11.7 | 14.0 | | | | | | | | | | | | | | | | | |
| IEE=2.5 | 4.0 | | | | | | | | | | | | | | | | | |
| TYP. | MAX. | | | | | | | | | | | | | | | | | |
| IDD=11.0 | 14.0 | | | | | | | | | | | | | | | | | |
| IEE=1.9 | 4.0 | | | | | | | | | | | | | | | | | |
| VDD-V0 | TYP. (16.9) (15.8) (15.4) | | | | | | | | | | | | | | | | | |
| VDD-V0 | TYP. (16.2) (15.0) (14.6) | | | | | | | | | | | | | | | | | |
| FEB.07.'95 | 7B64PS 2704- LMG7380QHFC-3 PAGE 4-1/1 | CHANGE: <table style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 70%;"></td><td style="text-align: center;">OPERATING</td></tr> <tr><td></td><td style="text-align: center;">MIN MAX</td></tr> <tr><td style="text-align: center;">AMBIENT TEMPREATURE</td><td style="text-align: center;">0°C 40°C</td></tr> </table> <p style="text-align: center;">↓</p> <table style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 70%;"></td><td style="text-align: center;">OPERATING</td></tr> <tr><td></td><td style="text-align: center;">MIN MAX</td></tr> <tr><td style="text-align: center;">AMBIENT TEMPREATURE</td><td style="text-align: center;">0°C 50°C</td></tr> </table> | | OPERATING | | MIN MAX | AMBIENT TEMPREATURE | 0°C 40°C | | OPERATING | | MIN MAX | AMBIENT TEMPREATURE | 0°C 50°C | | | | |
| | OPERATING | | | | | | | | | | | | | | | | | |
| | MIN MAX | | | | | | | | | | | | | | | | | |
| AMBIENT TEMPREATURE | 0°C 40°C | | | | | | | | | | | | | | | | | |
| | OPERATING | | | | | | | | | | | | | | | | | |
| | MIN MAX | | | | | | | | | | | | | | | | | |
| AMBIENT TEMPREATURE | 0°C 50°C | | | | | | | | | | | | | | | | | |
| | 7B64PS 2705- LMG7380QHFC-3 PAGE 5-1/1 | CHANGE: <table style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 30%;"></td><td style="text-align: center;">CONDITION</td><td style="text-align: center;">TYP.</td></tr> <tr><td style="text-align: center;">VDD-V0</td><td style="text-align: center;">Ta=40°C,φ=10°</td><td style="text-align: center;">(14.6)</td></tr> </table> <p style="text-align: center;">↓</p> <table style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 30%;"></td><td style="text-align: center;">CONDITION</td><td style="text-align: center;">TYP.</td></tr> <tr><td style="text-align: center;">VDD-V0</td><td style="text-align: center;">Ta=50°C,φ=10°</td><td style="text-align: center;">(14.3)</td></tr> </table> | | CONDITION | TYP. | VDD-V0 | Ta=40°C,φ=10° | (14.6) | | CONDITION | TYP. | VDD-V0 | Ta=50°C,φ=10° | (14.3) | | | | |
| | CONDITION | TYP. | | | | | | | | | | | | | | | | |
| VDD-V0 | Ta=40°C,φ=10° | (14.6) | | | | | | | | | | | | | | | | |
| | CONDITION | TYP. | | | | | | | | | | | | | | | | |
| VDD-V0 | Ta=50°C,φ=10° | (14.3) | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | |

3. MECHANICAL DATA

| | |
|-----------------------|--|
| (1) PART NAME | LMG7380QHFC |
| (2) MODULE SIZE | 160.0(W)mm * 68.0(H)mm * 12.0(D)mm max. |
| (3) DOT SIZE | 0.44 (W)mm * 0.44 (H)mm |
| (4) DOT PITCH | 0.47 (W)mm * 0.47 (H)mm |
| (5) NUMBER OF DOTS | 256 (W) * 64 (H) DOTS |
| (6) DUTY | 1/64 |
| (7) LCD | FILM TYPE BLACK/WHITE (POSITIVE/NEGATIVE TYPE). THE UPPER POLARIZER IS ANT-GLARE. TYPE. (HARDNESS.3H) THE BOTTOM POLARIZER IS TRANSMISSIVE TYPE. |
| (8) VIEWING DIRECTION | 6 O'CLOCK |
| (9) BACK LIGHT | COLD CATHODE FLUORESCENT LAMP |
| (10) CONTROLLER | T6963C |

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS.

VSS=0V:STANDARD

| ITEM | SYMBOL | MIN, | MAX. | UNIT | COMMENT |
|---------------------------|---------|------|---------|------|---------|
| POWER SUPPLY FOR LOGIC | VDD-VSS | 0 | 6.5 | V | |
| POWER SUPPLY FOR LC DRIVE | VDD-VEE | 0 | 20.5 | V | |
| INPUT VOLTAGE | V_i | -0.3 | VDD+0.3 | V | |
| INPUT CURRENT | I_i | 0 | 1 | A | |
| STATIC ELECTRICITY | - | - | - | - | NOTE 1 |

NOTE 1 MAKE CERTAINS YOU ARE GROUNDED WHEN HAND HANDLING LCM.

4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

| ITEM | OPERATING | | OPERATING | | COMMENT |
|---------------------|----------------|--------------------------------|----------------|---------------------------------------|----------------------|
| | MIN, | MAX. | MIN, | MAX. | |
| AMBIENT TEMPERATURE | 0°C | 50°C | -20°C | 60°C | NOTE 2,3 |
| HUMIDITY | NOTE 1 | | NOTE 1 | | WITHOUT CONDENSATION |
| VIBRATION | - | 4.9 m/s ² (0.5G) | - | 19.6 m/s ² 2G NOTE 5 | NOTE 4 |
| SHOCK | - | 29.4 m/s ² (3G) | - | 490.0 m/s ² (50G) | XYZ DIRECTIONS |
| CORROSIVE GAS | NOT ACCEPTABLE | | NOT ACCEPTABLE | | |

NOTE 1 $T_a \leq 40^\circ\text{C}$: 85%RH max.

$T_a > 40^\circ\text{C}$: ABSOLUTE HUMIDITY MUST BE LOWER THAN THE HUMIDITY OF 85%RH AT 40°C

NOTE 2 T_a AT -20°C ----- <48HRS, AT 60°C ----- <168HRS

NOTE 3 BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT TEMPERATURE. THIS PHENOMENON IS REVERSIBLE. HIGHER STARTING VOLTAGE OF CFL AND HIGHER LCD DRIVING VOLTAGE ARE NEEDED WHILE OPERATING AT 0°C.

THE LIFE TIME OF CFL WILL BE REDUCED WHILE OPERATING AT 0°C NEED TO MAKE SURE OF VALUE OF I_L AND CHARACTERISTICS OF INVERTER.

ALSO THE RESPONSE TIME AT 0°C WILL BE SLOWER.

NOTE 4 5Hz~100Hz (EXCEPT RESONANCE FREQUENCY)

NOTE 5 THIS MODULE SHOULD BE OPERATED NORMALLY AFTER FINISH THE TEST.

| | | | | | | |
|---|------|------------|------------|---------------------------|------|-------|
| KAOSIUNG HITACHI ELECTRONICS CO.,LTD | DATA | Feb.07.'95 | SH. No. | 7B64PS 2704-LMG7380QHFC-3 | PAGE | 4-1/1 |
|---|------|------------|------------|---------------------------|------|-------|

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS OF LCM

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|---------|-----------------|--------|--------|--------|------|
| POWER SUPPLY VOLTAGE FOR LOGIC | VDD-VSS | - | 4.75 | 5.0 | 5.25 | V |
| LC DRIVER CIRCUIT POWER SUPPLY VOLTAGE | VEE-VSS | - | -15.5 | -15.0 | -14.5 | V |
| INPUT VOLTAGE | VI | H LEVEL | 0.8VDD | - | VDD | V |
| | | L LEVEL | 0 | - | 0.2VDD | V |
| POWER SUPPLY CURRENT FOR LOGIC NOTE 1 | IDD | VDD-VSS=5.0V | - | 11.0 | 14.0 | mA |
| POWER SUPPLY CURRENT FOR LCD RIVING NOTE 1 | IEE | VDD-VSS=5.0V | - | 1.9 | 4.0 | mA |
| RECOMMENDED LC DRIVING VOLTAGE NOTE 2 | VDD-V0 | Ta= 0°C , φ=10° | - | (16.2) | - | V |
| | | Ta=25°C , φ=10° | - | (15.0) | - | V |
| | | Ta=50°C , φ=10° | - | (14.3) | - | V |
| FRAME FREQUENCY NOTE 3 | fFRAME | - | - | 75 | - | Hz |

NOTE 1: fFRAME=75Hz , VDD-V0=(15.0)V , Ta=25°C

NOTE 2: RECOMMENDED LC DRIVING VOLTAGE FLUCTATE ABOUT +/-1.0V BY EACH MODULE.

TEST PATTERN IS ALL "Q".

NOTE 3: NEED TO MAKE SURE OF FLICKERING AND RIPPLING OF DISPLAY WHEN SETTING THE FRAME FREQUENCY IN YOUR SET.

5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT

| ITEM | SYMBOL | MIN. | TYP. | MAX. | UNIT | NOTE |
|--------------------------|--------------|--------|------|------|------|---------|
| LAMP VOLTAGE | VL | - | 360 | - | V | Ta=25°C |
| FREQUENCY | fL | 30 | 70 | 85 | KHz | Ta=25°C |
| LAMP CURRENT | IL | 2.5 | 5 | 5.5 | mA | Ta=25°C |
| STARTI DISCHARGE VOLTAGE | VS NOTE 2 | (1000) | - | - | V | Ta=25°C |

NOTE 1 PLEASE CERTAINLY INFORM HITACHI BEFORE DESIGNING.

LAMP DRIVE CIRCUIT ACCORDING TO THE ABOVE SPECIFICATIONS.

NOTE 2 STARTING DISCHARGE VOLTAGE IS INCREASED WHEN LCM IS OPERATING AT IOWER TRMPERATURE.

PLEASE CHECK THE CHARACTERISTICS OF INVERTER BEFORE APPLING.

NOTE 3 AVERAGE LIFE TIME OF CFL WILL BE DECREASED WHEN LCM IS OPERATING AT LOWER TEMPERATURE.

| | | | | | | |
|---|------|------------|------------|---------------------------|------|-------|
| KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. | DATA | Feb.07.'95 | SH. No. | 7B64PS 2705-LMG7380QHFC-3 | PAGE | 5-1/1 |
|---|------|------------|------------|---------------------------|------|-------|

6. OPTICAL CHARACTERISTICS


6.1 OPTICAL CHARACTERISTICS

Ta=25°C (BACKLIGHT)

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------|-----------------|------------------------------------|------|-------|------|------|------|
| VIEWING AREA | $\phi 2-\phi 1$ | $K \geq 2.0$ | 30 | 40 | - | deg | 1,2 |
| CONTRAST RATIO | K | $\phi = 10^\circ \theta = 0^\circ$ | - | 20 | - | - | 3 |
| RESPONES TIME (RISE) | tr | $\phi = 10^\circ \theta = 0^\circ$ | - | (160) | - | ms | 4 |
| RESPONES TIME (FALL) | tf | $\phi = 10^\circ \theta = 0^\circ$ | - | (110) | - | ms | 4 |


(MEASURE CONDITION BY HITACHI)

NOTE1. DEFINITION OF θ AND ϕ
Z (NORMAL)

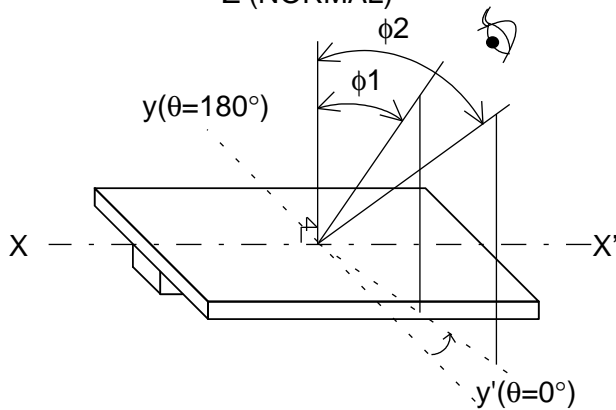


NOTE3. DEFINITION OF CONTRAST "K"
BRIGHTNESS ON SELECTED DOT (B1)
BRIGHTNESS ON NON-SELECTED DOT (B2)


$$K = \frac{\text{BRIGHTNESS ON SELECTED DOT (B1)}}{\text{BRIGHTNESS ON NON-SELECTED DOT (B2)}}$$

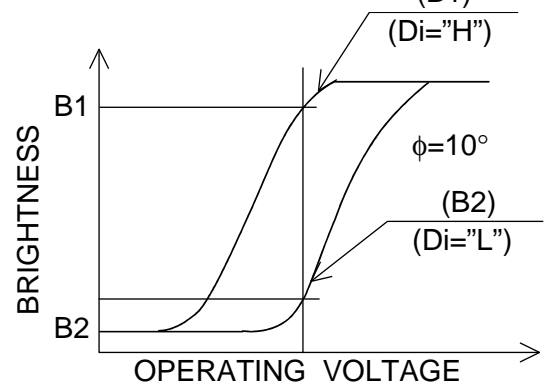


NOTE2. DEFINITION OF VIEWING ANGLE $\phi 1$ AND $\phi 2$

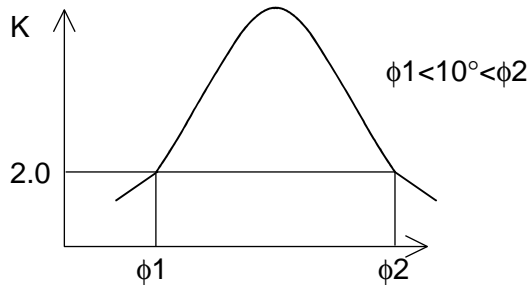

CONTRAST RATIO K VS VIEWING ANGLE ϕ

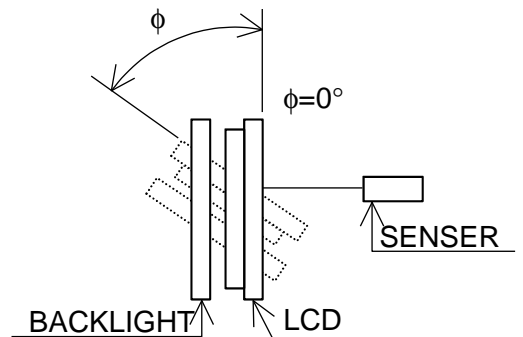

NOTE4. DEFINITION OF OPTICAL RESPONSE

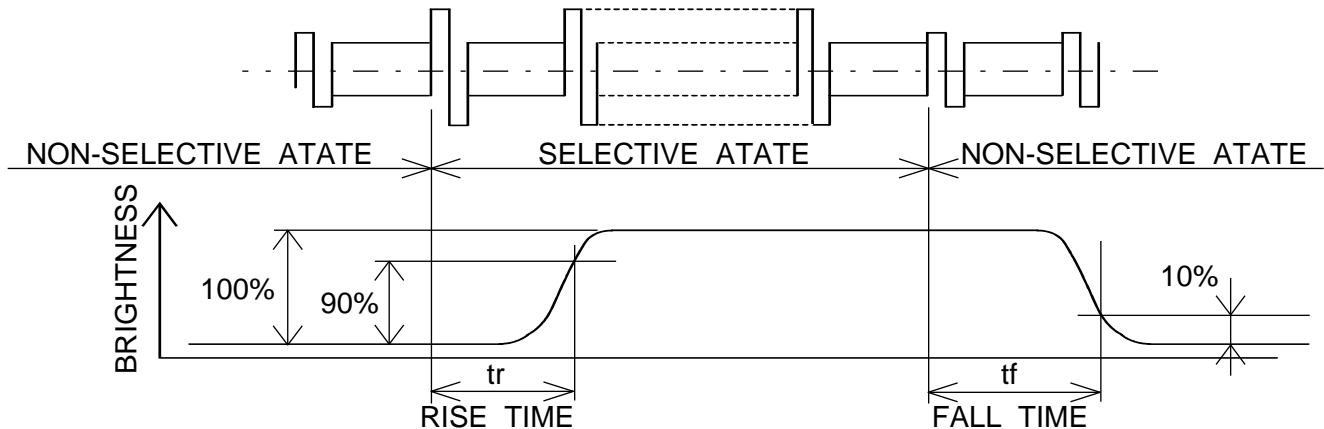

6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT
(LCM , BACKLIGHT ON , Ta=25°C)

| ITEM | MIN. | TYP. | MAX. | UNIT | NOTE |
|-----------------------|------|------|-------|-------------------|----------------------------|
| BRIGHTNESS | 70.0 | 90.0 | - | CD/m ² | IL=5mA , NOTE 1,2 |
| RISE TIME | - | 5 | - | MINUTE | IL=5mA , BRIGHTNESS 80% |
| BRIGHTNESS UNIFORMITY | - | - | +/-30 | | UNDERMENTIONED NOTE 1,3 |


CFL : INITIAL Ta=25°C , VDD-V0=15.0V
DISPLAY DATA SHOULD BE ALL "ON".

NOTE 1 : MEASUREMENT AFTER 10 MINUTES OF CFL OPERATING.

NOTE 2 : BRIGHTNESS CONTROL : 100%


NOTE 3 : MEASUREMENT OF THE FOLLOWING 9 PLACES ON THE DISPLAY.

DEFINITION OF THE BRIGHTNESS TOLERANCE.

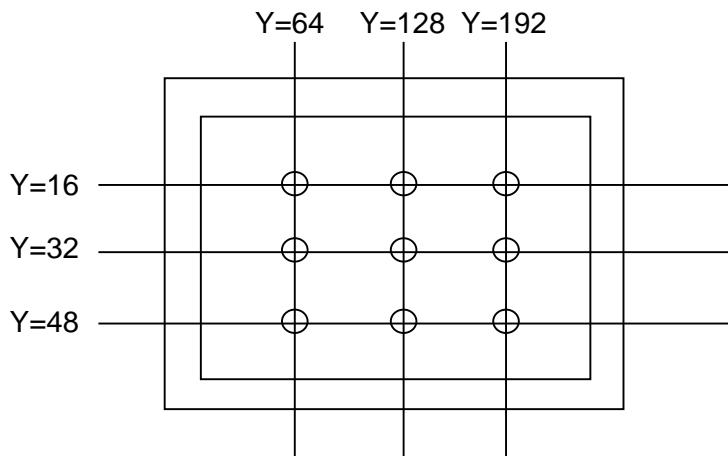


$$\left(\frac{\text{MAX BRIGHTNESS OR MIN BRIGHTNESS} - \text{AVERAGE BRIGHTNESS}}{\text{AVERAGE BRIGHTNESS}} \right) * 100$$

7. BLOCK DIAGRAM

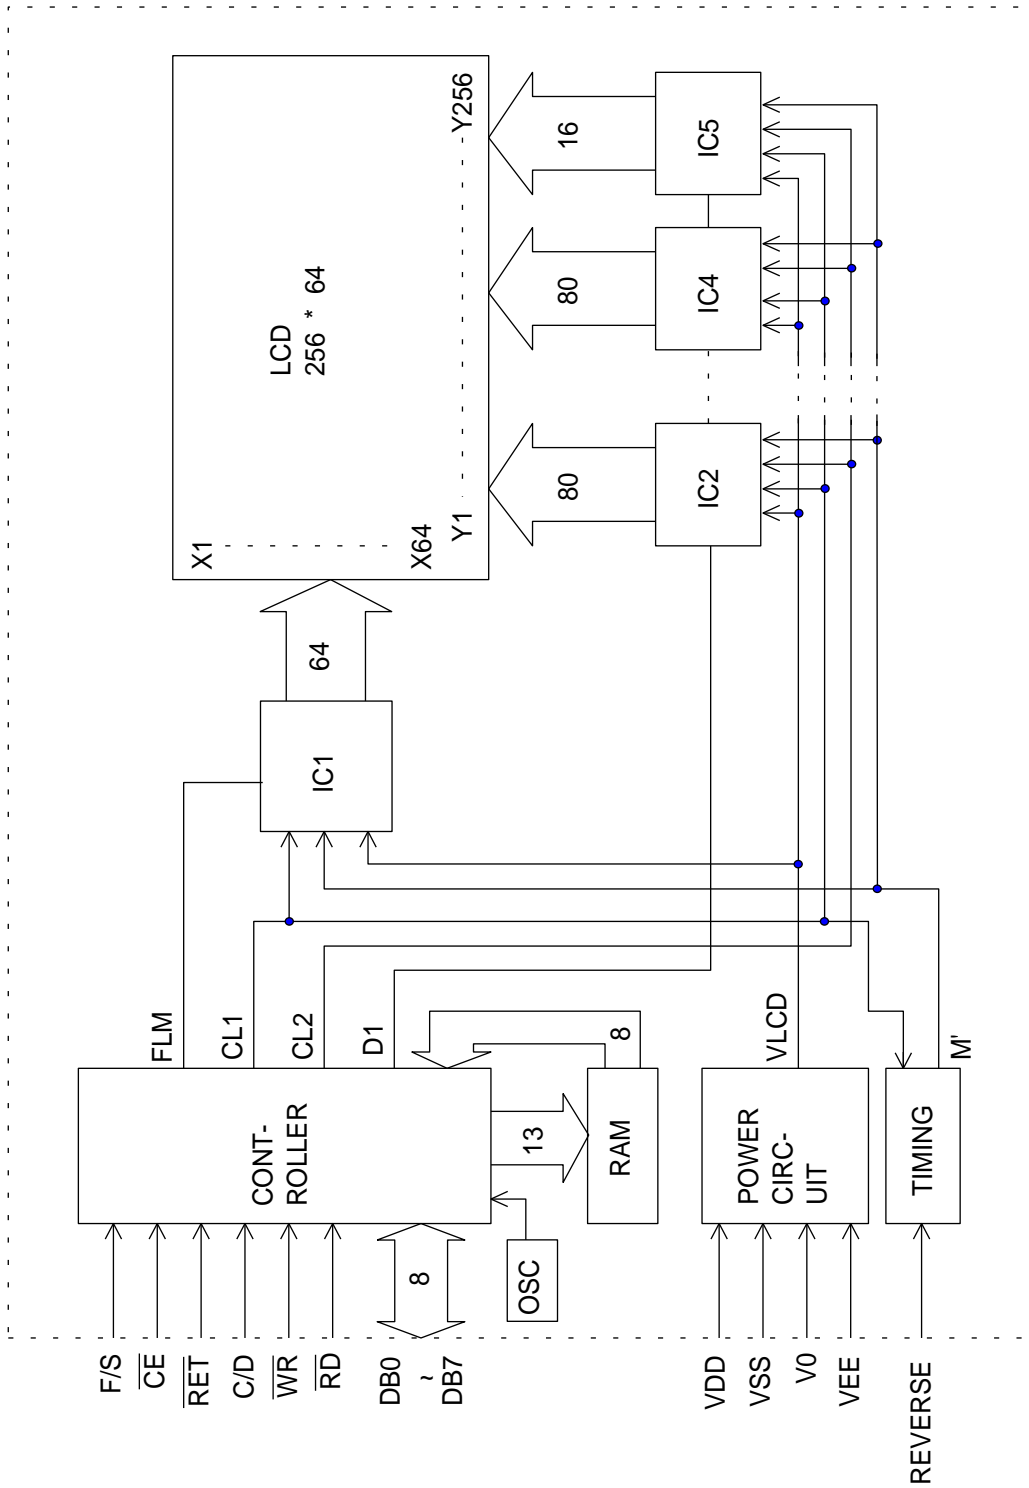


8.1 INTERFACE TIMING CHART

| ITEM | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|---|--|------|------|------|------|
| C/D SETUP TIME | tCDS | 100 | - | - | ns |
| C/D HOLD TIME | tCHD | 10 | - | - | ns |
| \overline{CE} , \overline{RD} , \overline{WR} PULSE WIDTH | $t\overline{CE}$, $t\overline{RD}$, $t\overline{WR}$ | 80 | - | - | ns |
| DATA SETUP TIME | tDS | 80 | - | - | ns |
| DATA HOLD TIME | tDH | 40 | - | - | ns |
| ACCES TIME | tACC | - | - | 150 | ns |
| OUTPUT HOLD TIME | tOH | 10 | - | 50 | ns |

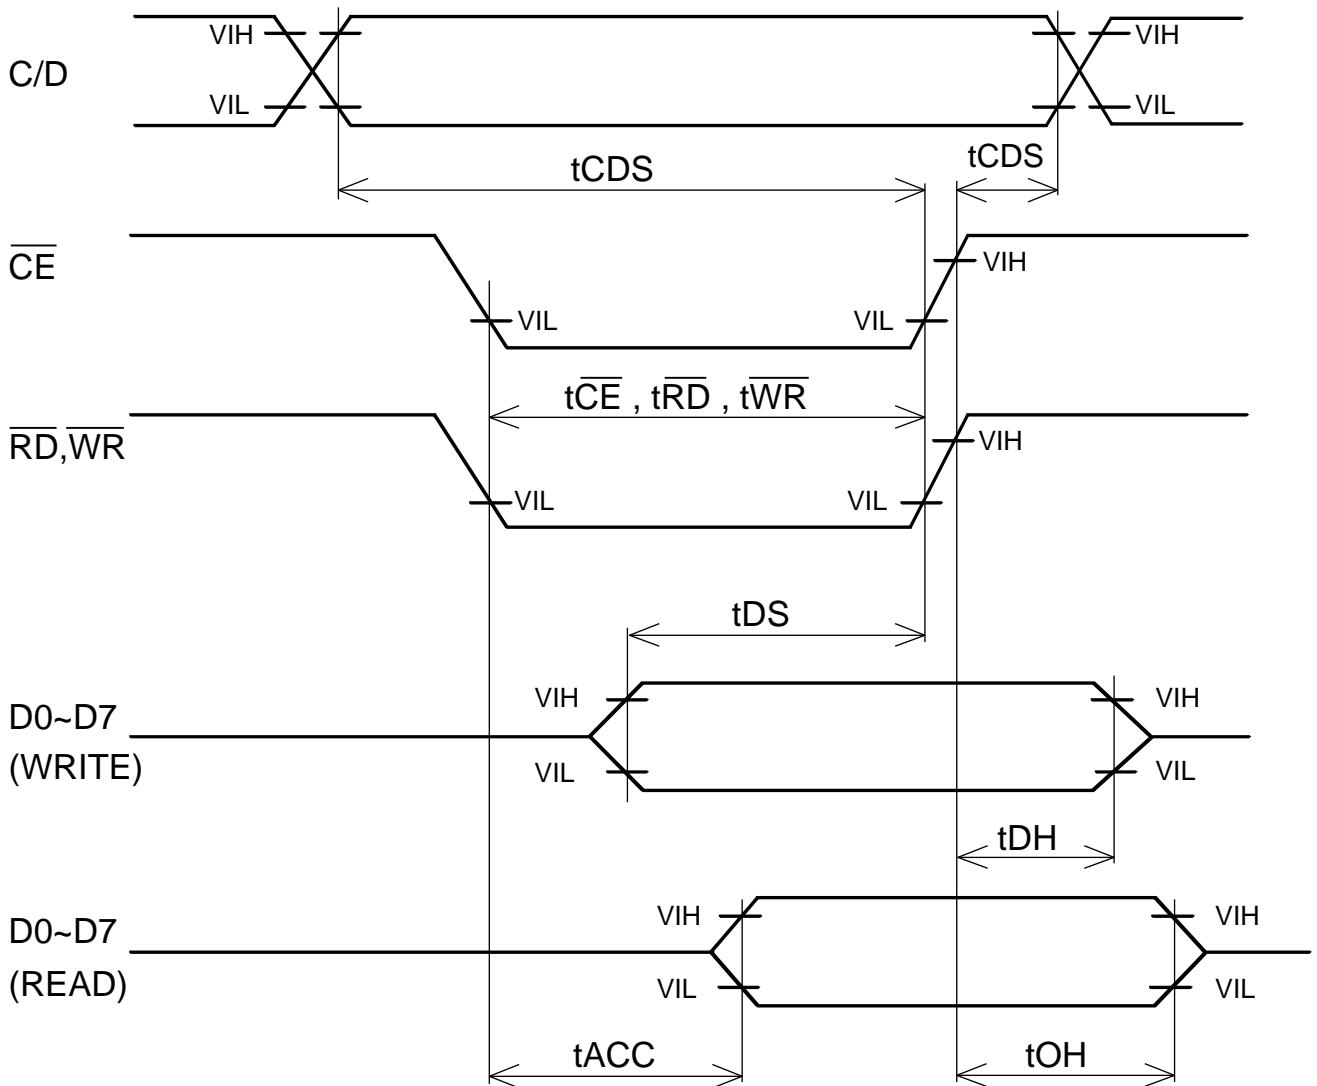


8.2 TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

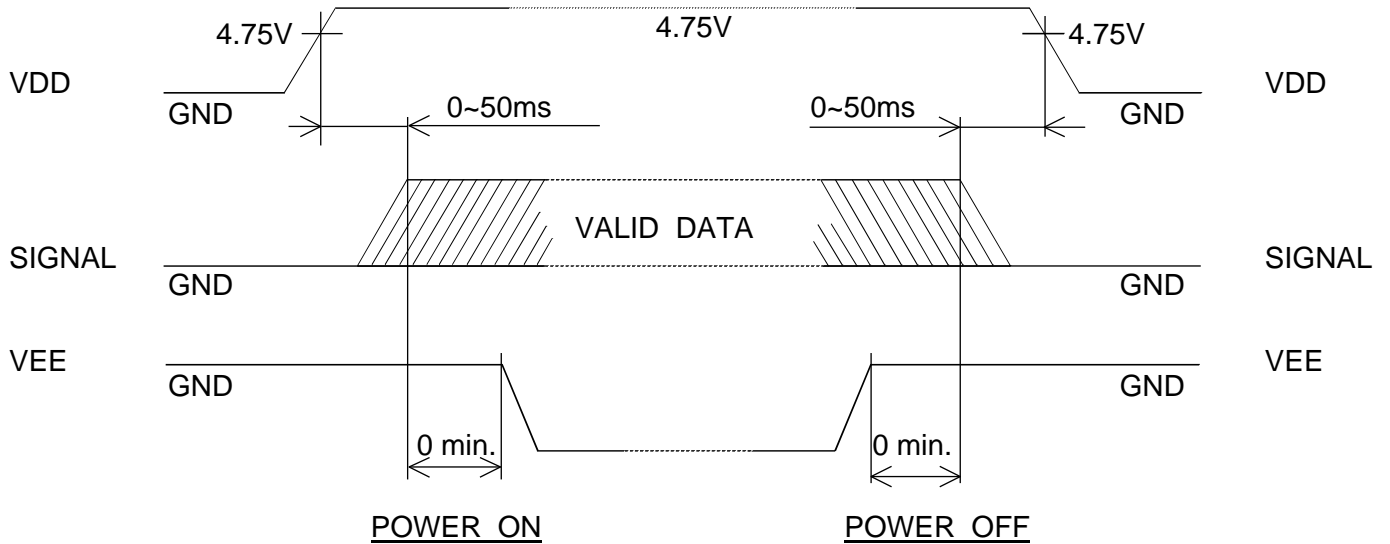


THE MISSING PIXELS MAY OCCUR WHEN THE LCM IS DRIVEN BEYOND ABOVE POWER INTERFACE TIMING SEQUENCE.

8.3 POWER SUPPLY FOR LCM (EXAMPLE)

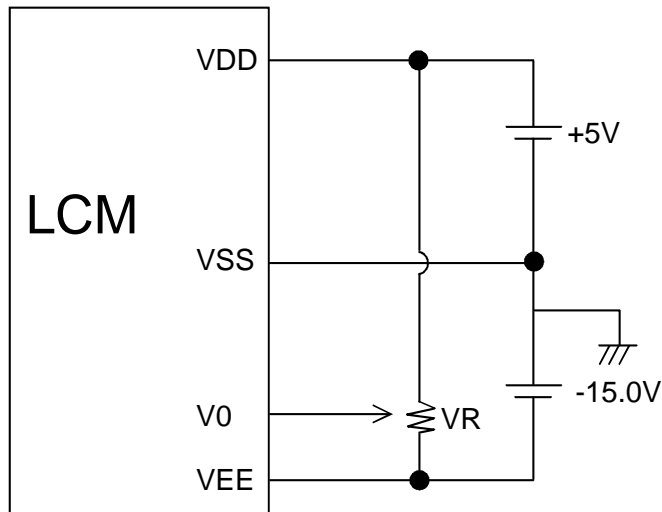

VR : 10~20K Ω
 VDD-V0 : LCD DRIVING VOLTAGE

9.1 DIMENSIONAL OUTLINE

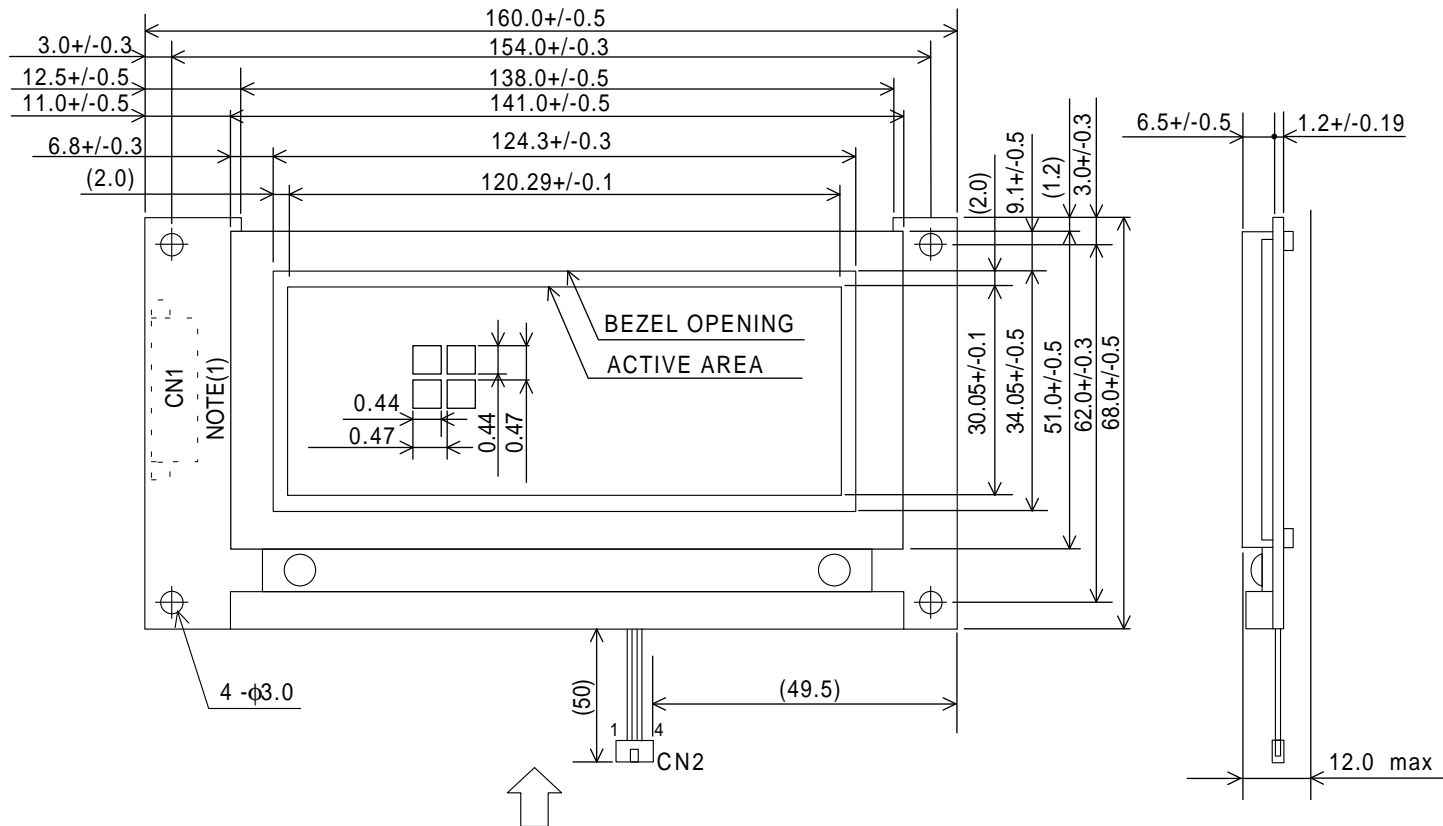

INTERFACE

| | |
|-----|----------|
| A01 | VSS |
| A02 | VDD |
| A03 | V0 |
| A04 | C/D |
| A05 | WR |
| A06 | RD |
| A07 | DB0 |
| A08 | DB1 |
| A09 | DB2 |
| A10 | DB3 |
| A11 | DB4 |
| A12 | DB5 |
| A13 | DB6 |
| A14 | DB7 |
| A15 | CE |
| A16 | RET |
| A17 | VEE |
| A18 | DISP.OFF |
| A19 | F/S |
| A20 | REVERSE |

CFL I/F

| | |
|---|-----|
| 1 | GND |
| 2 | N.C |
| 3 | N.C |
| 4 | H.V |


↑
VIEWING DIRECTION

UNIT: mm
SCALE: NTS

CONTROLLER : T6963C
CFL - I/F CONNECTOR
MITSUMI M63M83 - 04
APPLIED TO :
MITSUMI M61M73 - 04
MITSUMI M60 - 04 - 30 - 114P
MITSUMI M60 - 04 - 30 - 134P

NOTE(1): CONNECTOR ON THE LSI SIDE OF PCB
TYPE: LZ-20P-SL-SMT-E3000 (MAKER: JAE)

9.2 DISPLAY PATTERN

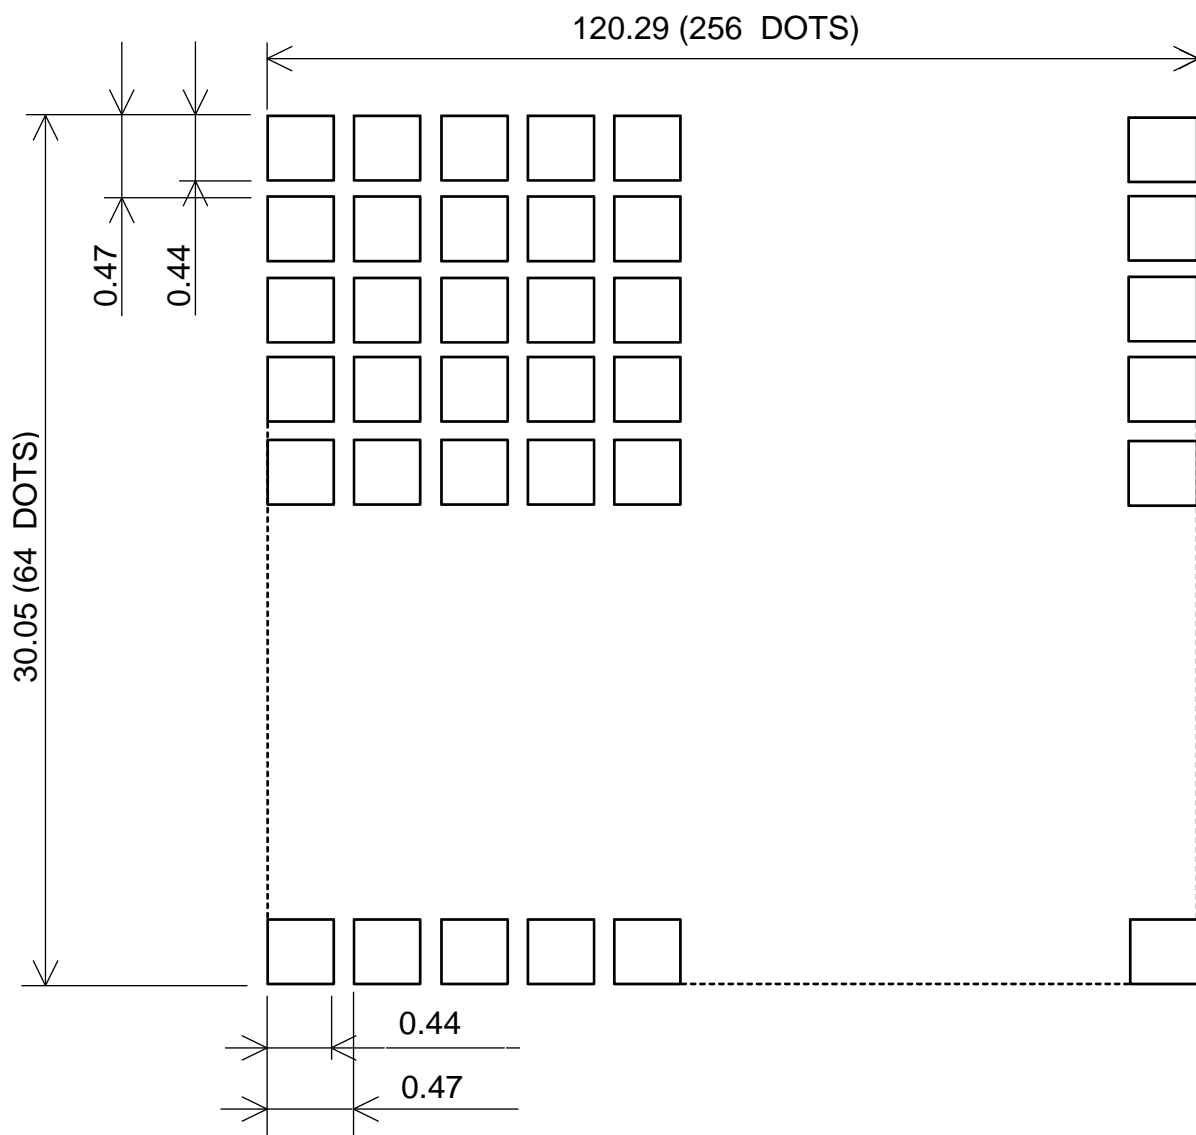

SCAL : NTS
 UNIT : mm
 MEASUREMENT TOLERANCE : +/-0.1

9.3 INTERFACE PIN CONNECTION
CN1

| PIN No. | SYMBOL | FUNCTION |
|---------|-----------|--|
| A1 | VSS(0V) | GROUND |
| A2 | VDD(+5V) | POWER SUPPLY FOR LOGIC CIRCUIT |
| A3 | V0 | POWER SUPPLY FOR LCD DRIVE |
| A4 | C/D | WR="L":C/D="H" COMMAND WRITE C/D="L" DATA WRITE RD ="L":C/D="H" STATUS READ C/D="L" DATA READ |
| A5 | WR | DATA WRITE (DATA WRITE AT "L") |
| A6 | RD | DATA READ (READ DATA AT "L") |
| A7~14 | DB0~DB7 | DATA BUS |
| A15 | CE | CHIP ENABLE (CE MUST BE "L") |
| A16 | RET | RESET |
| A17 | VEE(-15V) | POWER SUPPLY FOR LCD DRIVE |
| A18 | D.OFF | NC/DISPLAY GND/DISPLAY OFF |
| A19 | F/S | CHARACTER FONT SELECT : F/S="H" 6*8FONT F/S="H" 6*8FONT |
| A20 | REVERSE | DISPLAY MODE REVERSE. |

CN2

| INTERFACE | PIN No. | SYMBOL | LEVEL | FUNCTION | |
|-----------|---------|--------|-------|----------|----------------------|
| CFL | CFL I/F | 1 | GND | - | CFL GND |
| | | 2 | N.C | - | - |
| | | 3 | N.C | - | - |
| | | 4 | H.V | - | POWER SUPPLY FOR CFL |

CFL I/F : MITSUMI M63M83-04

SUITABLE CONNECTOR : MITSUMI M61M73-04

MITSUMI M60-04-114P (STRAIGHT)


MITSUMI M60-04-30-134P (ANGLE)

SUITABLE INVERTER : HARISON INVC191

10. APPEARANCE STANDARD

10.1 APPEARANCE INSPECTION CONDITION
VISUAL INSPECTION SHOULD BE DONE
UNDER THE FOLLOWING CONDITION.


- (1) IN THE DARK ROOM
- (2) WITH CFL PANEL LIGHTED WITH PRESCRIBED INVERTER CIRCUIT.
- (3) WITH EYES 25cm DISTANCE FROM LCM.
- (4) VIEWING ANGLE WITHIN 45 DEGREES FROM THE VERTICAL LINE TO THE CENTER OF LCD.

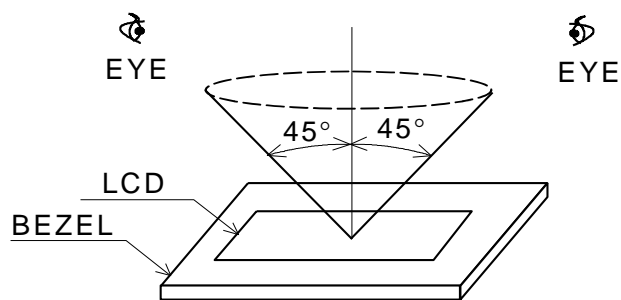

10.2 DEFINITION OF EACH ZONE

A ZONE : WITHIN THE EFFECTIVE DISPLAY AREA SPECIFIED AT PAGR 9-1/3 OF THIS DOCUMENT.

B ZONE : AREA BETWEEN THE WINDOW OF BEZEI LINE AND THE EFFECTIVE DISPLAY AREA LINE SPECIFIED AT AT PAGE 9-1/3 OF THIS DOCUMENT.

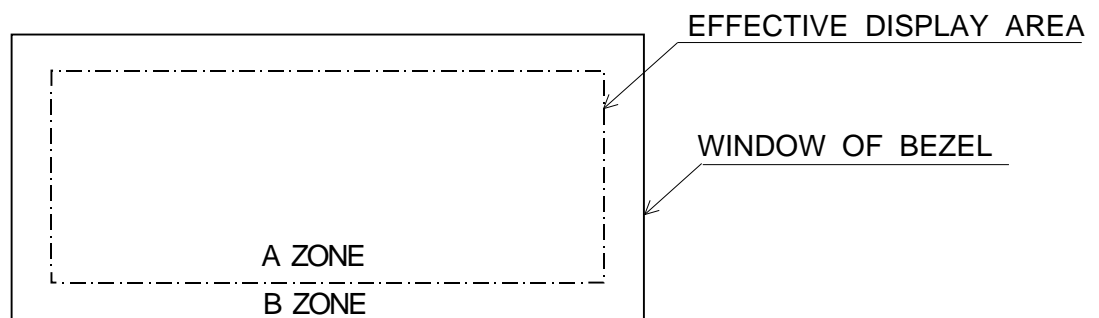

10.3 APPEARANCE SPECIFICATION

(1) LCD APPEARANCE

*) IF THE PROBLE OCCURES, ABOUT THIS ITEM, THE RESPONSIBLE PERSON OF BOTH PARTY (CUSTOMER AND HITACHI) WILL DISCUSS MORE DETAIL.


| No. | ITEM | CRITERIA | | | A | B | |
|---------------------------------------|--|---|------------------------------|------------------------------|---|---|---|
| L C D | SCRATCHES | DISTINGUISHED ONE IS NOT ACCEPTABLE (TO BE JUDGED BY HITACHI STANDARD) | | | * | - | |
| | DENT | SAME AS ABOVE | | | * | - | |
| | WRINKLES IN POLARIZER | SAME AS ABOVE | | | * | - | |
| | BUBBLES | AVERAGE DIAMETER D(mm) | | MAXIMUM NUMBER ACCEPTABLE | | O | - |
| | | D<=0.2 | | IGNORE | | | |
| | | 0.2<D<=0.3 | | 12 | | | |
| | | 0.3<D<=0.5 | | 3 | | | |
| | | 0.5<D | | NONE | | | |
| | STAINS, FOREIGN MATERIALS DARK SPOT | FILAMENTOUS | | | O | * | |
| | | LENGTH L(mm) | WIDTH W(mm) | MAXIMUM NUMBER ACCEPTABLE | | | |
| | | L<=2.0 | T<=0.03 | IGNORE | | | |
| | | L<=3.0 | 0.03<T<=0.05 | 6 | | | |
| | | - | 0.05<T | NONE | | | |
| | | ROUND | | | O | * | |
| | | AVERAGE DIAMETER D(mm) | MAXIMUM NUMBER ACCEPTABLE | MINIMUM SPACE | | | |
| | | D<0.2 | IGNORE | - | | | |
| | | 0.2<=D<0.3 | 6 | 10mm | | | |
| | | 0.3<=D<0.4 | 4 | 30mm | | | |
| | 0.4<=D | NONE | - | | | | |
| | THE WHOLE NUMBDR | | FILAMENTOUS+ROUND=5 | | O | O | |
| THOSE WIPED OUT EASILY ARE ACCEPTABLE | | | | | | | |
| COLOR TONE | TO BE JUDGED BY HITACHI STANDARD | | | O | - | | |
| COLOR UNIFORMITY | SAME AS ABOVE | | | O | - | | |
| PINHOLE | (A+B)/2<=0.15 | | MAXIMUM NUMBER : IGNORD | | O | - | |
| | 0.15<(A+B)/2<=0.3 | | MAXIMUM NUMBER : IGNORD | | | | |
| | C<=0.03 | | MAXIMUM NUMBER : IGNORD | | | | |

| No. | ITEM | CRITERIA | | | | A | B |
|-----------------|---|----------------------------------|--|---------------------------------|------------------|---|---|
| L | CONTRAST IRREGULARITY (SPOT) | AVERAGE DIAMETER D(mm) | CONRRAST | MAXIMUM NUMBER ACCEPTABLE | MINUMUN SPACE | O | - |
| | | D<=0.25 | TO BE JUDGED BY HITACHI STANDARD | IGNORE | - | | |
| | | 0.25<=D<=0.35 | | 10 | 20mm | | |
| | | 0.35<=D<=0.5 | | 4 | 20mm | | |
| | | 0.5<=D | | NONE | - | | |
| C D | CONTRAST IRREGULARITY (A PAIR OF SCRATCH) | WIDTH L(mm) | LENGTH W(mm) | MAXIMUM NUMBER ACCEPTABLE | MINIMUM SPACE | O | - |
| | | L<=1.2 | W<=0.25 | 2 | 20mm | | |
| | | L<=1.5 | W<=0.2 | 3 | 20mm | | |
| | | L<=2.0 | W<=0.15 | 3 | 20mm | | |
| | | L<=3.0 | W<=0.1 | 4 | 20mm | | |
| | | THE WHOLE | | | 6 | | |
| RUBBING SCRATCH | | TO BE JUDGED BY HITACHI STANDARD | | | | | |

| No. | ITEM | CRITERIA | | | A | B |
|---|---|---------------------------|-----------------|------------------------------|---|---|
| C F L | DARK SPOTS IRREGULARITY FOREIGN (SPOT) | AVERAGE DIAMETER D(mm) | | MAXIMUM NUMBER ACCEPTABLE | O | - |
| | | D≤0.4 | | IGNORED | | |
| | | 0.4<D | | NONE | | |
| B A C K L I G H T | FOREIGN MATERIALS (LINE) | WIDTH W(mm) | LENGTH W(mm) | MAXIMUM NUMBER ACCEPTABLE | O | - |
| | | W≤0.2 | L≤2.5 | 1 | | |
| | | | 2.5<L | NONE | | |
| 0.2<W | - | NONE | | | | |
| | SCRATCHES | WIDTH W(mm) | LENGTH L(mm) | MAXIMUM NUMBER ACCEPTABLE | O | - |
| | | W≤0.1 | - | IGNORED | | |
| | | 0.1<W≤0.2 | L≤11.0 | 1 | | |
| | | | 11.0<L | NONE | | |
| 0.2<W | - | NONE | | | | |


NOTE

(1) DEFINITION OF AVERAGE DIAMETER D

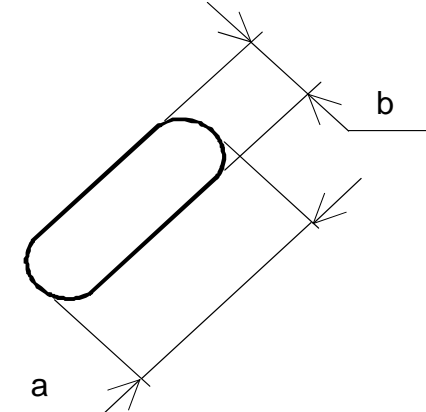


$$D = \frac{a+b}{2}$$

(2) DEFINITION OF LENGTH L AND WIDTH W



(3) DEFINITION OF PINHOLE

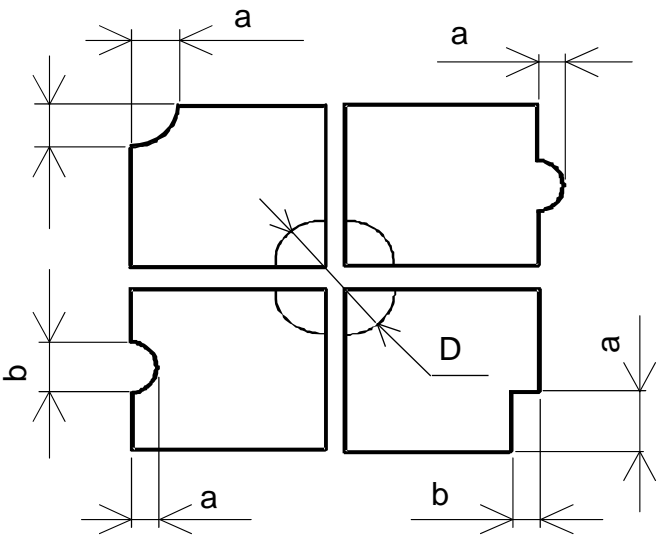


C:SALIENCE


11. PRECAUTION IN DESIGN

11.1 MOUNTING METHOD

SINCE THE MODULE IS SO CONSTRUCTED AS TO BE FIXED BY UTILIZING FITTING HOLES IN THE MODULE AS SHOWN BELOW, IT IS NECESSARY TO TAKE CONSIDERATION THE FOLLWING ITEMS ON ATTACHMENT TO A FRAME.

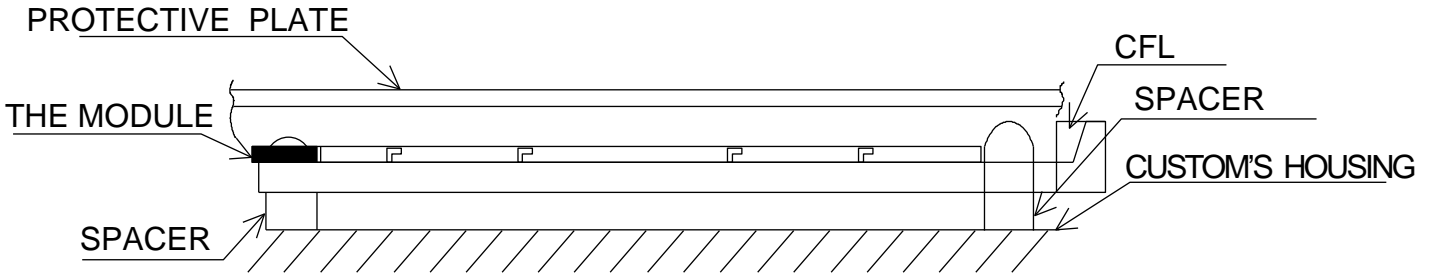

EXAMPLE OF MOUNTING

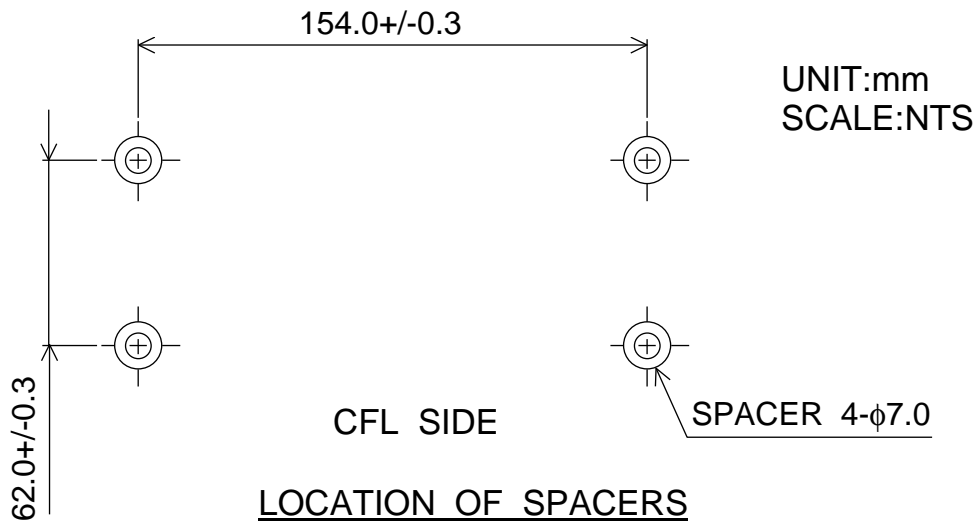

LOCATION OF SPACERS

- (1) USE OF PROTECTIVE PLATE,MADE OF AN ACRYLIC PLATE, ETC, IN ORDER TO PROTECT A POLARIZER AND LC CELL.
- (2) TO PREVENT THE MODELE COVER FROM BEING PRESSES, THE SPACERS BETWEEN THE MODULE AND THE FITTING PLATES SHOUD BE LONGER THAN 0.5mm.
- (3) WE RECOMMEND YOU TO USE PROTECTIVE SPACER AS FIGURE FOR PROTEXTING LCD MODULE FROM ANY KIND SHOCK TO YOU SET.

11.2 LC DRIVING VOLTAGE(V0) AND VIEWING ANGLE RANGE.

SETTING VO OUT OF THE RECOMMENDED CONDITION WILL BE A CAUSE FOR A CHANGE OF VIEWING ANGLE RANGE.

| | | | | | | |
|---|------|------------|------------|---------------------------|------|--------|
| KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. | DATA | Feb.07.'95 | SH. No. | 7B64PS 2707-LMG7380QHFC-3 | PAGE | 11-1/4 |
|---|------|------------|------------|---------------------------|------|--------|

11.3 CAUTION AGAINST STATIC CHARGE

AS THIS MODULE IS PROVIDED WITH C-MOS LSI, THE CARE TO TAKE SUCH A PRECAUTION AS TO GROUNDING THE OPERATOR'S BODY IS REQUIRED WHEN HANDLING IT.

11.4 POWER ON SEQUENCE

INPUT SIGNALS SHOULD NOT BE APPLIED TO LCD MODULE BEFORE POWER SUPPLY VOLTAGE IS APPLIED AND REACHES TO SPECIFIED VOLTAGE(5+/-0.25V) IF ABOVE SEQUENCE IS NOT LEPT, C-MOS LSIS OF LCD MODULES MAY BE DAMAGED DUE TO LATCH UP PROBLEM.

11.5 PACKAGING

(1) NO. LEAVING PRODUCTS IS PREFERABLE IN THE PLACE OF HIGH HUMIDITY FOR A LONG PERIOD OF TIME. FOR THEIR STORAGE IN THE PLACE WHERE TEMPERATURE IS 35°C OF HIGHER. SPECIAL CARE TO PREVENT THEM FROM HIGH HUMIDITY IS REQUIRED. A COMBINATION OF HIGH TEMPERATURE AND HIGH HUMIDITY MAY CAUSE THEM POLARIZATION DEGRADATION DEGRADATION AS WELL AS BUBBLE GENETRATION AND POLARIZER PEEL-OFF. PLEASE KEEP THE TEMPERATURE AND HUMIDITY WITHIN THE SPECIFIED RANGE DOR USE AND STORING.

(2) SINCE UPPER POLARIZERS AND LOWER ALUMINUM PLATES TEND TO BE EASILY DAMAGED, THEY SHOULD BE HANDLED WITH FULL CARE SO AS NOT TO GET THEM TOUCHED, PUSHED OR RUBBED BY A PIECE OF GLASS. TWEEZERS AND ANYTHING ELSE WHICH ARE HARDER THAN A PENCIL LEAD 3H.

(3) AS THE ADHESIVES USED FOR ADHERING UPPER/LOWER POLARIZERS AND ALUMUNUM PLATES ARE MADE OF ORGANIC SUBSTANCES WHICH WILL BE DETERIORATED BY A CHEMICAL REACTION WITH SUCH CHEMICALS AS ACETONE,TULUENE ETHANOLE AND ISOPROPYLALCOHOL. THE FOLLOWING SOLVENTS ARE RECOMMENDED FOR USE:

NORMAL HEXANE

PLEASE CONTACT US WHEN IT IS NECESSARY FOR YOU TO USE CHEMICALS OTHER THAN THE ABOVE.

(4) LIGHTLY WIPE TO CLEAN THE DIRTY SURFACE WITH ABSORBENT COTTON WASTE OR OTHER SOFT MATERIAL LIKE CHAMOIS,SOAKED IN THE CHEMICALS RECOMMENDED WITHOUT SCRUBBING IT HARDLY.
TO PREVENT THE DISPLAY SURFACE FROM DAMAGE AND KEEP THE APPEARANCE IN GOOD STATE,IT IS SUFFICIENT, IN GENERAL, TO WIPE IT WITH ABSORBENT COTTON.

- (5) IMMEDIATELY WIPE OFF SALIVA OR WATER DROP ATTACHED ON THE DISPLAY AREA BECAUSE ITS LONG PERIOD ADHERANCE MAY CAUSE DEFORMATION OR FADED COLOR ON THE SPOT.
- (6) FOGY DEW DEPOSITED ON THE SURFACE AND CONTACT TERMINALS DUE TO COLDENESS WILL BE A CAUSE FOR POLARIZER DAMAGE, STAIN AND DIRT ON PRODUCT.WHEN NECESSARY TO TAKE OUT THE PRODUCTS FROM SOME PLACE AT LOW TEMPERATURE FOR TEST, ETC. IT IS REQUIRED FOR THEM TO BE WARMED UP IN A CONTAINER ONCE AT THE TEMPERATURE HIGHER THAN THAT OF ROOM.
- (7) TOUCHING THE DISPLAY AREA AND CONTACT TERMINALS WITH BARE HANDS AND CONTAMINATING THEM ARE PROHIBITED, BECAUSE THE STAIN ON THE DISPLAY AREA AND POOB INSULATION BETWEEN TERMINALS ARE OFTEN CAUSED BY BEING TOUCHED BY BARE HANDS.
(THERE ARE SOME COME COSMETICS DETRIMENTAL TO POLARIZERS.)
- (8) IN GENERAL THE QUALITY OF GLASS IS FRAGILE SO THAT IT TENDS TO BE CRACKED OR CHIPPED IN HANDLING, SPECIALLY ON ITS PERIPHERY. PLEASE BE CAREFUL NOT GIVE IT SHAPR SHOCK CAUSED BY DROPPING DOWN, ETC.

11.6 CAUTION FOR OPERATION

- (1) IT IS AN INDISPENSABLE CONDITION TO DRIVE LCD'S WITHIN THE SPECIFIED VOLTAGE LIMIT SINCE THE HIGHER VOLTAGE THAN THE LIMIT CAUSES THE SHORTER LCD LIFE. AN ELECTROCHEMICAL REACTION DUE TO DIRECT CURRENT CAUSES LCD'S UNDESIRABLE DETERIORATION, SO THAT THE USE OF DIRECT CURRENT DRIVER SHOULD BE AVOIDED.
- (2) RESPONSE TIME WILL BE EXTREMELY DELAYED AT LOWER TEMPERATURE THAN THE OPERATING TEMPERATURE RANGE AND ON THE OTHER HAND AT HIGHER TEMPERATURE LCD'S SHOW DARK BULE COLOR IN THEN.HOWEVER THOSE PHENOMENA DO NOT MEAN MALFUNCTION OR OUT OF ORDER WITH LCD'S WHICH WILL COME BACK IN THE SPECIFIED OPERATING TEMPERATURE RANGE.
- (3) IF THE DISPLAY AREA IS PUSHED HARD DURING OPERATION,SOME FONT WILL BE ABNORMALLY DISPLAYED BUT IT RESUMES NORMAL CONDITION AFTER TURNING OFF ONCE.

| | | | | | | |
|---|------|------------|------------|---------------------------|------|--------|
| KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. | DATA | Feb.07.'95 | SH. No. | 7B64PS 2711-LMG7380QHFC-3 | PAGE | 11-3/4 |
|---|------|------------|------------|---------------------------|------|--------|

(4) A SLIGHT DEW DEPOSITING ON TEMPINALS IS A CAUSE FOR ELECTROCHEMICAL REACTION RESULTING IN TERMINAL OPEN CIRCUIT. USAGE UNDER THE RELATIVE CONDITION OF 40°C 50%RH OR LESS IS REQUIRED.

11.7 STORAGE

IN CASE OF STORING FOR A LONG PERIOD OF TIME (FOR INSTANCE, FOR YEARS) FOR THE PURPOSE OF REPLACEMENT USE, THE FOLLOWING WAYS ARE RECOMMENED.

- (1) STORAGE IN A PLOYETHYLENE BAG WITH THE OPENING SEALED SO AS NOT TO ENTER FRESH AIR OUTSIDE IN IT. AND WITH NO DESICCANR.
- (2) PLACING IN A DARK PLACE WHERE NEITHER EXPOSURE TO DIRECT SUNLIGHT NOR LIGHT IS, KEEPING TEMPERATURE IN THE RANGE FROM 0°C TO 35°C
- (3) STORING WITH NO TOUCH ON POLARIZER SURFACE BY ANYTHING ELSE. (IT IS RECOMMENDED TO STORE THEM AS THEY HAVE BEEN CONTAINED IN THE INNER CONTAINER AT THE TIME OF DELIVERY FROM US.)


11.8 SAFETY

- (1) IT IS RECOMMENDABLE TO CRASH DAMAGED OR UNNECESSARY LCD' INTO PIECES AND EASH OFF LIQUID CRYSTAL BY EITHER OR SOLVENTS SUCH AS ACETONE AND ETHANOL, WHICH SHOUD BE BURNED UP LATER.
- (2) WHEN ANY LIQUID LEAKED OUT OF A DAMAGED GLASS CELL COMES IN CONTACT WITH YOUR HANDS, PLEASE WASH IT OFF WELL WITH SOAP AND WATER.

12. DESIGNATION OF LOT MARK

LOT MARK

LOT MARK IS CONSISTED OF 4 DIGITS FOR PRODUCTION LOT

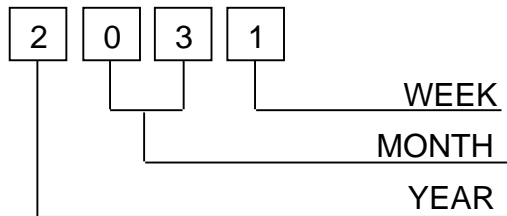

| YEAR | FIGURE IN LOT MARK |
|------|--------------------|
| 1997 | 7 |
| 1998 | 8 |
| 1999 | 9 |
| 2000 | 0 |

| MONTH | FIGURE IN LOT MARK | MONTH | FIGURE IN LOT MARK |
|-------|--------------------|-------|--------------------|
| JAN. | 01 | JULY. | 07 |
| FEB. | 02 | AUG. | 08 |
| MAR. | 03 | SEPT. | 09 |
| APR. | 04 | OCT. | 10 |
| MAY. | 05 | NOV. | 11 |
| JUNE. | 06 | DEC. | 12 |

| WEEK (DAY IN CALENDAR) | FIGURE IN LOT MARK |
|------------------------|--------------------|
| 01~07 | 1 |
| 08~14 | 2 |
| 15~21 | 3 |
| 22~29 | 4 |
| 30~31 | 5 |

LOCATION OF LCD MARK : ON THE BACK SIDE OF LCM

2031

13. PRECAUTION FOR USE

- (1) A LIMIT SAMPLE SHOULD BE PROVIDED BY THE BOTH PARTIES ON AN OCCASION WHEN THE BOTH PARTIES AGREED ITS NECESSITY. JUDGEMENT BY A LIMIT SAMPLE SHALL TAKE EFFECT AFTER THE LIMIT SAMPLE HAS BEEN ESTABLISHED AND CONFIRMED BY THE BOTH PARTIES.

- (2) ON THE FOLLOWING OCCASIONS, THE HANDLING OF THE PROBLEM SHOULD BE DECIDED THROUGH DISCUSSION AND AGREEMENT BETWEEN RESPONSIBLE PERSONS OF THE BOTH PARTIES.
 - (1) WHEN A QUESTION IS ARISEN IN THE SPECIFICATIONS.
 - (2) WHEN A NEW PROBLEM IS ARISEN WHICH IS NOT SPECIFIED IN THIS SPECIFICATIONS.
 - (3) WHEN AN INSPECTION SPECIFICATIONS CHANGE OR OPERATING CONDITION CHANGE IN CUSTOMER IS REPORTED TO HITACHI AND SOME PROBLEM IS ARISEN IN THIS SPECIFICATION DUE TO THE CHANGE.
 - (4) WHEN A NEW PROBLEM IS ARISEN AT THE CUSTOMER'S OPERATING SET FOR SAMPLE EVALUATION IN THE CUSTOMER SITE.

- (3) REGARDING THE TREATMENT FOR MAINTENANCE AND REPAIRING, BOTH PARTIES WILL DISCUSS IT IN SIX MONTHS LATER AFTER LATEST DELIVERY OF THIS PRODUCT.

THE PRECAUTION THAT SHOULD BE OBSERVED WHEN HANDLING LCM HAVE BEEN EXPLAINED ABOVE. IF ANYPOINTS ARE UNCLEAR OR IF YOU HAVE ANY REQUESTS, PLEASE CONTACT HITACHI.

| | | | | | | |
|---|------|------------|------------|---------------------------|------|--------|
| KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. | DATA | Feb.07.'95 | SH. No. | 7B64PS 2713-LMG7380QHFC-3 | PAGE | 13-1/1 |
|---|------|------------|------------|---------------------------|------|--------|