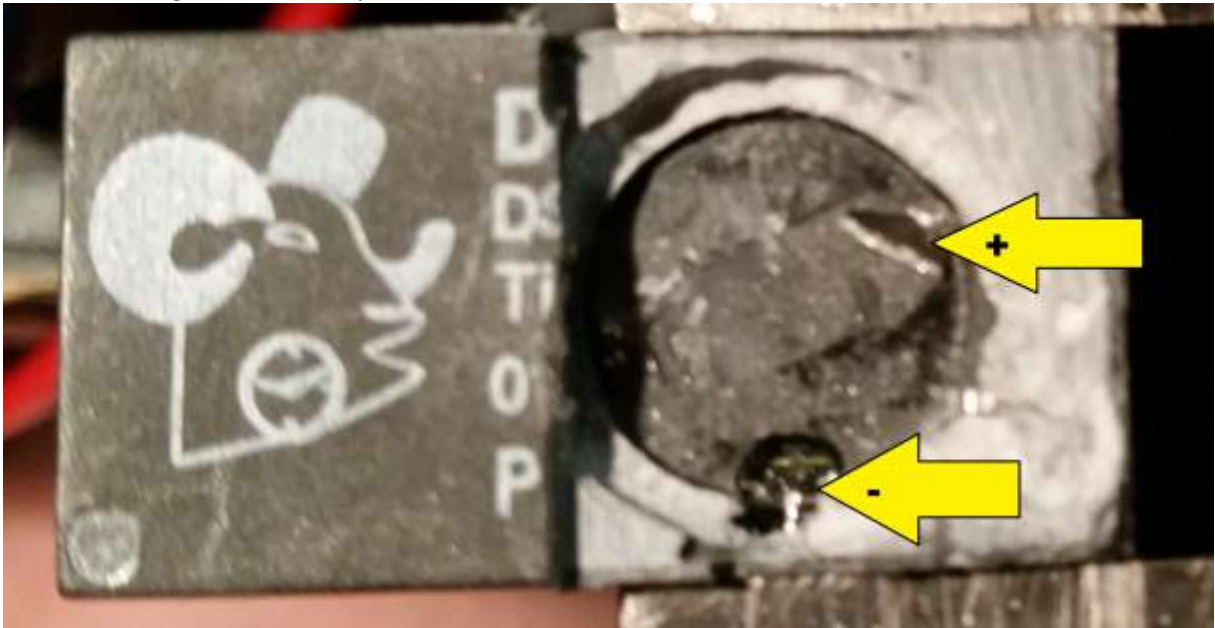TDS3032 NVRAM/Timekeeper DS1742W-120

After some years out of the market I could only buy NOS IC and already after some month,
the battery failed again.
So carefully remove the battery (or ask your dentist to do so for you), solder 2 flexible wires and refill
the hole with some epoxy resin. I used Varta 3 V Li, but any long lifetime Li cell with 3 V should do the
job.

After removing the old battery:

DH7LK 3/2022