



**DISPLAY**

- LCD with graphics
- DIN, dash or trailer mount
- Gross/net weight
- Axle group weights
- Stability indication
- Diagnostics

**FEATURES**

- Capacity - 17 to 50tonne
- Accuracy -  $\pm 1.5\%$
- Net payload weight
- Display shows GVW and percentage loading on tractor and trailer
- Alarm sounder
- RS232 output
- Trailer identification

**OPTIONAL FEATURES**

- Printer - thermal
- Printer - heavy duty
- Custom printer headers
- 511 FreeWeigh - handheld remote display


**DESCRIPTION**

The 5<sup>th</sup> Wheel & Air system incorporates an air sensor principle to measure the pressure in the trailer's air suspension system; specifically designed fifth wheel load cells replace the existing fifth wheel pedestal. Accurate and simple to operate, 5<sup>th</sup> Wheel & Air is suitable with any combination of tractor trailer in multiple vehicle fleets via trailer swap identification. The system displays front and rear axle groups as well as vehicle total weight on the 1155 indicator.

**APPLICATIONS**

- For all major makes of the fifth wheel
  - Jost
  - VBG/Fontaine
  - York
- All trailer units with air suspension

**SYSTEM BLOCK DIAGRAM**

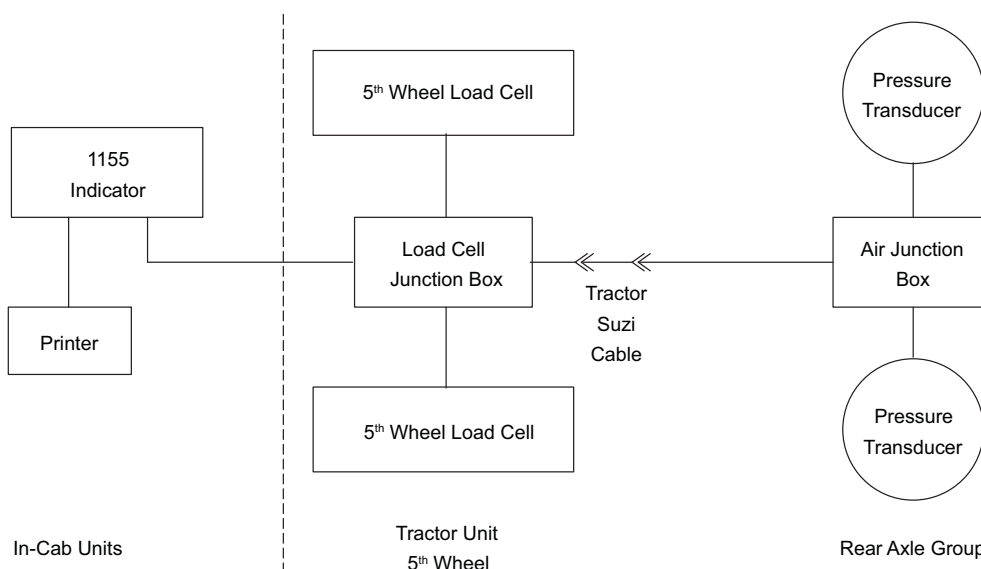

<b>SPECIFICATIONS</b>				
<b>PARAMETERS</b>	<b>MINIMUM</b>	<b>TYPICAL</b>	<b>MAXIMUM</b>	<b>UNIT</b>
<b>SYSTEM</b>				
Accuracy	1.5			% GVW
Gross weight capability	17		50	tonnes GVW
Operating voltage	15	24	30	Vdc
Supply current - operation (@24Vdc)			300	mA
Supply current - standby (@24Vdc)			10	mA
Operating temperature	0		60	°C
<b>INDICATOR</b>				
Type	LCD			
Size	79.0 x 30.9			mm
Operating temperature	-10		+50	°C
Resolution	240 x 90 dots			
Dot pitch	0.42			mm
Environmental protection	IP 20			
On screen display of weight				
Password protection	4 digits, manager and user PIN			
Load deliver capability				
Form factor	Din cut out			
<b>ACCESSORIES AND OPTIONS</b>				
511 FreeWeigh compatible	Wireless remote unit, 868 MHz, 15 channels			
Weighing modes	Standard, axle, twin/5 <sup>th</sup> wheel and air, drawbar			
<b>INTERFACES</b>				
Serial printer port	RS232, 9 pin female			
Baud rate	1200, 2400, 9600, 19200, 57600			bps
Expansion connector	12 pin male			
Junction box connector	4 pin male			
Power connector	4 pin male			
Overload alarm audible	Optional external alarm sounder on vehicle			
Alarm output level (@24Vdc)	102			dB(A)
Adjustable bracket				
Trailer mount				



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.