

**FEATURES**


- Resistances from 0.025Ohm to 10kOhms
- Power Rating to 25Watt
- Resistance Tolerances to  $\pm 1\%$
- TCR to  $\pm 100\text{ppm/K}$
- Load Stability to 0.5%
- TO-126 Housing (D-Pak)
- Solder Reflow Secure at 260°C / 20s



TABLE 1 – SPECIFICATIONS					
TYPE		NPS 2-T126B			
Resistance Range		0.025 to 0.049Ohms	0.05 to 0.099Ohms	0.1 to 0.99Ohms	1.0 to 10kOhms
Power Rating	With heatsink	25W			
Tolerances (others upon request)		2% / 5%		1% / 2% / 5%	
Thermal Resistance		6.0 K/W			
Stability (1000h)		0.5%			
Temperature Coefficient		$\pm 500\text{ ppm/K}$	$\pm 400\text{ ppm/K}$	$\pm 300\text{ ppm/K}$	$\pm 100\text{ ppm/K}$
Voltage Proof		2.0 kVDC			
Operating Temperature Range		-40°C to 175°C			
Resistor Material		Thick Film			
Substrate		Al <sub>2</sub> O <sub>3</sub>			
Backplate		Copper / Nickel-plated			
Housing		PPS			
Connector Material		Cu / Ni-flash / lead-free tinned			
Terminals		2 (standard contact S)			
Reflow soldering		lead free soldering time above 220°C max. 90 s max. temperature 245°C and JEDEC-J-STD-020			

ORDERING INFORMATION
Part Number - Resistance - Contact - Tolerance
NPS 2-T126B 1R100 S 1%

**FIGURE 1 – DERATING**

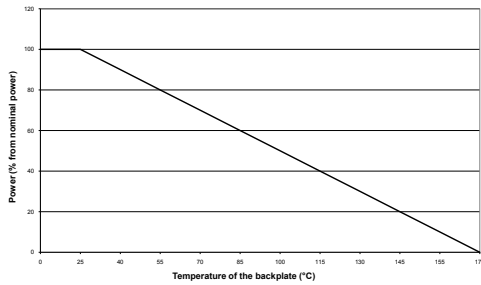


**Power Rating Notes -**

The NPS Series Resistors must be attached to a suitable heat-sink. The maximum internal resistor temperature is 175°C. To specify an appropriate heatsink use the following formula :


$$R_{0H} = \frac{T_{MAX} - ( P \times R_{0R} ) - T_A}{P}$$

Where:  $R_{0H}$  = Thermal Resistance of Heatsink ( K/W )  
 $R_{0R}$  = Thermal Resistance of Resistor ( K/W )  
 $T_{MAX}$  = Maximum Temperature of Resistor  
 $T_A$  = Ambient Temperature of Heatsink ( °C )  
 $P$  = Power Through Resistor ( W )

**FIGURE 2 – DIMENSIONS** in mm (inches)

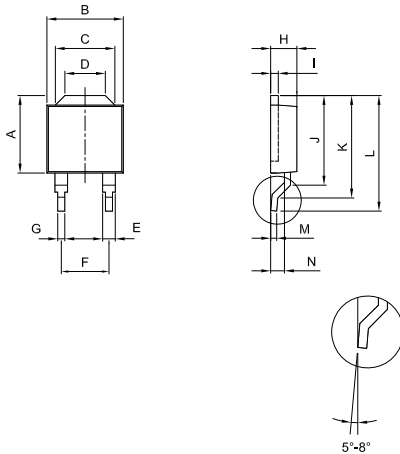

Dimension	
A ±0.2 (±0.008)	8.26 (0.33)
B ±0.2 (±0.008)	8.13 (0.32)
C ±0.1 (±0.004)	6.35 (0.25)
D ±0.1 (±0.004)	4.31 (0.17)
E ±0.1 (±0.004)	1.35 (0.05)
F ±0.1 (±0.004)	5.08 (0.20)
G ±0.1 (±0.004)	0.76 (0.03)
H ±0.1 (±0.004)	2.79 (0.11)
I ±0.1 (±0.004)	0.8 (0.03)
J ±0.2 (±0.008)	9.55 (0.38)
K ±0.2 (±0.008)	10.92 (0.43)
L ±0.2 (±0.008)	12.32 (0.49)
M ±0.1 (±0.004)	0.6 (0.02)
N ±0.1 (±0.004)	1.47 (0.06)

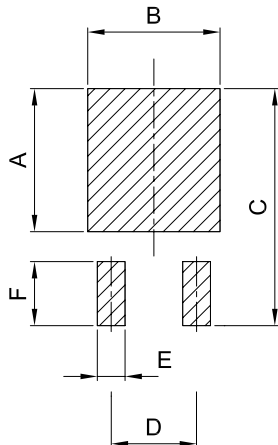

Dimension	
A	8.51 (0.335)
B	7.87 (0.310)
C	14.1 (0.555)
D	5.08 (0.200)
E	1.65 (0.065)
F	3.81 (0.150)



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.