

FEATURES

- Resistances from 0.01 to 51K Ohms
- Power Rating to 20Watt
- Resistance Tolerances to $\pm 0.05\%$
- TCR to $\pm 5\text{ppm/K}$
- TO-126 Housing
- Convenient SMD DPak Available
- Low Inductance ($< 50\text{nH}$)



RoHS*
COMPLIANT

TABLE 1 – SPECIFICATIONS

Maximum Current	25A		
Temperature Range	-55°C to +155°C : NPR 2-T126 -55°C to +120°C : NPP 2-T126		
Dielectric Strength	2000 VAC		
Max. Operating Voltage	500 V or $\sqrt{(P \cdot R)}$		
Insulation Resistance	> 1000 Meg-Ohm		
Environmental Performance	ΔR		Test Conditions
Load Life	$\pm 1\%$	$\pm 1\%$	25°C / 90 min ON / 30 min OFF / 1000 hr
Humidity Resistance	$\pm 1\%$	$\pm 1\%$	40°C / 90-95% RH / DC 0.1W / 1000 hr
Temperature Cycle	$\pm 0.25\%$	$\pm 0.25\%$	-55°C for 30 min / +155°C for 30 min / 1000 hr
Solder Heat	$\pm 0.1\%$	$\pm 1\%$	+350°C / 3s
Vibration	$\pm 0.25\%$	$\pm 0.25\%$	

Type	Power Rating		Thermal Resistance	Resistance Range ³		Tolerances	Temperature Coefficients
	Heatsink ¹	Free Air ²		Min	Max		
NPR 2-T126	20W	1W	5.9K/W	0.01 Ω	51K Ω	$\pm 1\%$ (R $> 0.1\Omega$) $\pm 5\%$	$\pm 50\text{ppm/K}$ (R $> 10\Omega$) $\pm 100\text{ppm/K}$ (R $> 0.1\Omega$) $\pm 250\text{ppm/K}$
NPP 2-T126	5W	0.5W	6.0K/W	1 Ω	51K Ω	$\pm 0.05\%$ / $\pm 0.1\%$ / $\pm 0.25\%$ (R $> 5\Omega$) $\pm 0.5\%$ (R $> 1\Omega$)	± 5 / $\pm 10\text{ppm/K}$ (R $> 5\Omega$) $\pm 25\text{ppm/K}$ (R $> 1\Omega$)

¹ Power rating based on 25°C Flange Temperature

² Power rating based on 25°C Ambient Temperature


³ Consult Factory for Higher or Lower Values

ORDERING INFORMATION

Part Number - Resistance - Tolerance - TCR

NPR 2-T126 0.5 Ohm 1% 100ppm

FIGURE 1 – DERATING

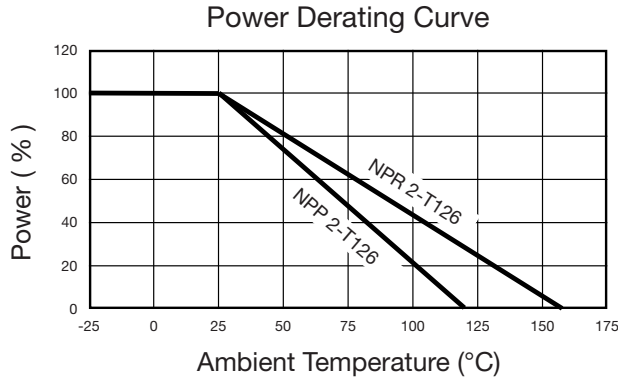

Power Rating Notes -


The NPR 2-T126 Series Foil Resistors must be attached to a suitable heatsink. The maximum internal resistor temperature is 155°C (120°C for the NPP 2-T126).

To specify an appropriate heatsink use the following formula :

$$R_{0H} = \frac{T_{MAX} - (P \times R_{0R}) - T_A}{P}$$

Where: R_{0H} = Thermal Resistance of Heatsink (K/W)
 R_{0R} = Thermal Resistance of Resistor (K/W)
 T_{MAX} = Maximum Temperature of Resistor
 T_A = Ambient Temperature of Heatsink (°C)
 P = Power Through Resistor (W)

FIGURE 2 – DIMENSIONS

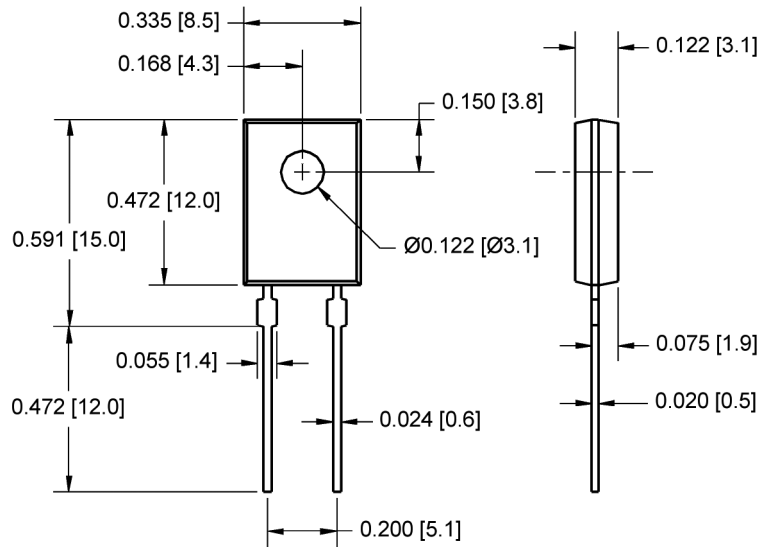

Mounting Notes -

The NPR 2-T126 Series Film Resistors must be attached to a suitable heatsink. Mount resistor using thermal grease to a clean / flat surface. Use a compression washer to provide 150 to 300 pounds (665 to 1330N) of mounting force. Torque mounting screw to 8 in-lbs (0.9 Nm).



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.