



Aircraft Weighing Systems Reverse

A Brand of VPG On-Board Weighing

JetWeigh-W™

Jack Point Wireless Aircraft Weighing System

Key Features

- Wireless operation: easy installation, operation and maintenance
- Capacity range: 15,000 to 600,000 pounds
- Synchronized sampling of all weight channels result in accurate measurement, minimizing the vibration, oscillation and wind effects
- Robust and reliable operation
- Operation range: more than 220 ft. (70 m)
- Accuracy of $\pm 0.1\%$ of applied load, or $\pm 0.02\%$ of channel capacity, whichever is greater
- User-friendly hand-held PC user terminal interface
- Library of up to 200 aircraft types and characteristics
- Hermetically sealed, compact stainless steel load cells

Applications

- Routine weight and center-of-gravity monitoring
- Weight checks after airframe repairs and modifications
- Design proving weight and center-of-gravity determinations

Jack Point Aircraft Weighing System

Specifications

Accuracy:	0.1% of applied load or 0.02% of channel capacity, whichever is greater									
Calibration method:	Dead weight calibration of load cells in factory									
Model	JW-15W	JW-20W	JW-30W	JW-40W	JW-75W	JW-100W	JW-150W	JW-200W	JW-300W	JW-400W
No. of cells	3	4	3	4	3	4	3	4	3	4
Cell capacity (lbs.)	5,000	10,000	10,000	10,000	10,000	25,000	50,000	50,000	100,000	100,000
Kit capacity (lbs.)	15,000	20,000	30,000	40,000	75,000	100,000	150,000	200,000	320,000	400,000
Part number	64001-00W	64001-01W	64001-02W	64001-03W	64001-04W	64001-05W	64001-06W	64001-07W	64001-08W	64001-09W
Resolution (lbs.)	0.5	0.5	1	1	2	2	5	5	10	10
Kit weight (lbs.)	72	78	72	78	72	78	78	78	96	110
Kit dimensions (in.)	32.88 X 17.5 X 8.75									
Model	JW-250W	JW-425W	JW-450W	JW-500W	JW-600W	JW-100W	JW-150W	JW-200W	JW-300W	JW-400W
No. of cells	5	5	5	5	3	4	3	4	3	4
Cell capacity, mains (lb)	50,000	100,000	100,000	100,000	200,000	25,000	50,000	50,000	100,000	100,000
Cell capacity, nose (lb)	50,000	25,000	25,000	50,000	200,000	100,000	150,000	200,000	320,000	400,000
Kit capacity (lb)	250,000	425,000	450,000	500,000	600,000	64001-05W	64001-06W	64001-07W	64001-08W	64001-09W
Part number	64001-16W	64001-12W	64001-13W	64001-14W	64001-15W	64001-10W	64001-11W	64001-12W	64001-13W	64001-14W
Resolution, mains (lb)	5	10	10	10	20	2	5	5	10	10
Resolution, nose (lb)	5	2	2	5	10	2	5	5	10	20
Load Cell Sampling:	Synchronized sampling of all load cells									
Conversion rate:	50 conversions / second per load cell									
Internal resolution:	16,777,216 (24 bits)									
Wireless communication:	World-wide license-free ISM band, 2400 to 2483.5MHz									
Operating band:	More than 70m									
Communication range:	Star topology, point-to-multipoint CSMA communication									
Networking:	FCC and ETSI									
Compliance:										
Software features:	<ul style="list-style-type: none"> On-board automatic center of gravity calculation Re-configurable load cell arrangement 3 weights modes to meet different environmental conditions Automatic latitude and altitude adjustment of weight value Automatic zero tracking On-board library of up to 200 aircraft types and characteristics Diagnostic algorithms check for system errors 									

DISCLAIMER All product specifications and data are subject to change without notice. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any product of Vishay Precision Group. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

For technical questions, contact: obw.usa@vishaypg.com; obw.uk@vishaypg.com; obw.prc@vishaypg.com

Specifications cont.


Data (displayed and printed):	<ul style="list-style-type: none"> Gross weight Individual load cell weights (kg, lb and %) CG location (inches, cm, % of MAC) Arm weights Lateral weights distribution Total moments Serial interface to download (or synchronize) to a PC
Weighing save options:	<ul style="list-style-type: none"> Internal memory Serial interface to download (or synchronize) to a PC
Power:	<ul style="list-style-type: none"> 50 hours between recharges (typical) Rechargeable Li-Ion batteries, 1100mAh (Load cells & terminal) Power adaptor, 110 or 230VAC, 1A
Environmental protection:	<ul style="list-style-type: none"> Load cells – IP65 Hand-held terminal – rugged, impact resistant, water resistant enclosure Kit case – high-impact fiberglass carrying case
Environmental conditions:	<ul style="list-style-type: none"> Operating temperature: <ul style="list-style-type: none"> +32°F to +120°F (-10°C to +50°C) -4°F to +140°F (-20°C to +60°C) Storage temperature: <ul style="list-style-type: none"> +95% RH, non-condensing

System content:

- 3 to 5 wireless load cells
- Rugged hand-held PC user terminal
- Thermal printer
- Power adaptors and power cord
- Center-of-gravity accessory kit
- Rugged fiberglass carrying case

Center-of-gravity accessory kit content:

- Level
- Plumb bob assembly (2)
- Chalk and line
- Hydrometers (2)
- Fuel dipper
- Hydrometer jar and stand
- Leveling bar
- 50' Steel tape
- Screwdriver
- 12" steel ruler

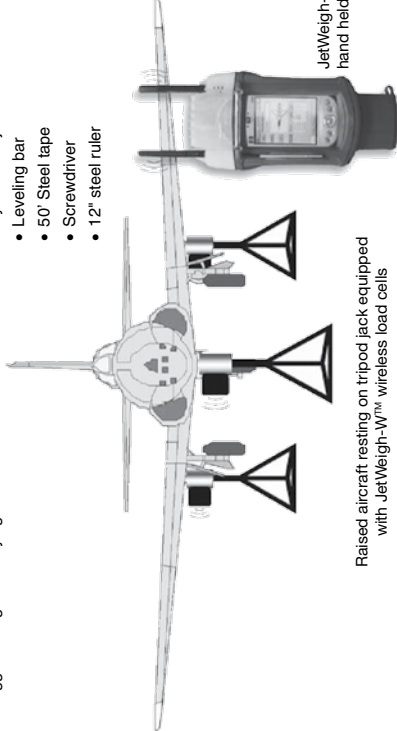

Raised aircraft resting on tripod jack equipped with JetWeigh-W™ wireless load cells

Where the World Goes
for Precision Measurement and Control