

Compression Load Cells

FEATURES

- Capacity range: 500, 1K, 2K, 3K, 5K, 10K, 20K, 50K, and 100K lb (227, 454, 907, 1.4K, 2.27K, 4.54K, 9K, 13.6K, 22.7K, and 45.4K kg)
- Environmentally sealed
- Operational: -30° to +175°F
- Low deflection
- Compact and rugged
- FM and CSA approved (NTEP Certificate of Conformance for Class III Scale Applications—20K to 100K)

APPLICATIONS

- Test and measurement
- Calibration standards
- Redundant weighing systems

DESCRIPTION


C3P1 and C3P2 cells are fabricated with high strength 'ring' type elements to provide an output signal of 3 mV/V at rated capacity. Each cell is designed for minimum deflection and 150% safe overload without damage. C3P2 cells contain a second bridge. The second bridge can be used simultaneously with the first bridge for dual output or be reserved as a backup in case of failure in the first bridge. Double diaphragm fabrication offers precision



performance and long term reliability. Low deflection and superior sealing guarantee trouble-free operation.


Relatively low mass and small deflection under load, produce excellent frequency response. Overall, C3P1/ C3P2 cells perform superbly in many environments where other transducers cannot.

CONFIGURATION

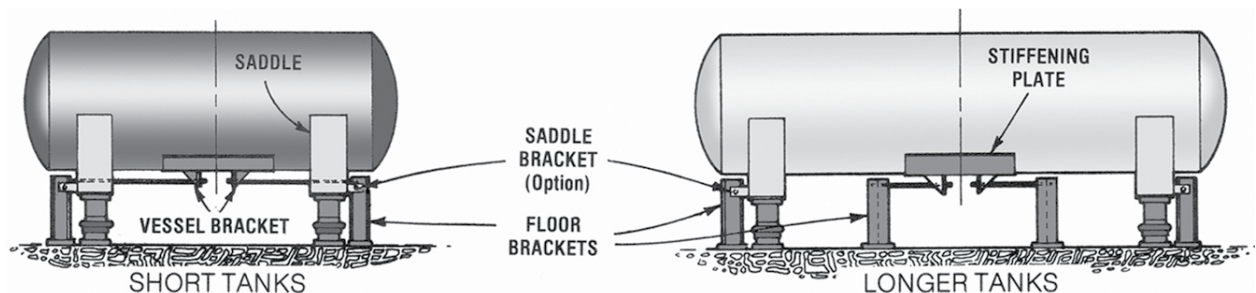


Compression Load Cells

OUTLINE DIMENSIONS—DOUBLE BRIDGE—500 TO 10K POUNDS

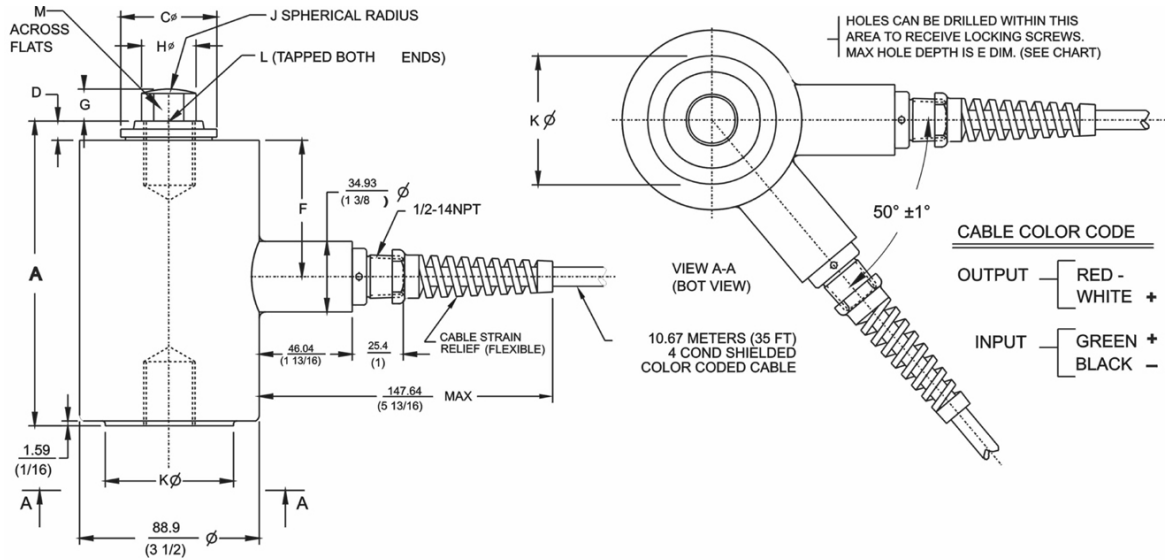

CAP.	KILOGRAMS (POUNDS)	A	B φ	C φ	D	E	F φ	G	H φ	J	K φ	L (TAPPED)	M
227 (500)	THRU 1361 (3000)	115.89 (4 9/16)	—	26.99 (1 1/16)	6.35 (1/4)	—	57.15 (2 1/4)	9.53 (3/8)	16 (5/8)	50.8 (2)	31.75 (1 1/4)	1/2-20UNF-2B X 1/2 DP	9.53 (3/8)
2268 (5000)	& 4536 (10000)	150.81 (5 15/16)	44.45 (1 3/4)	47.63 (1 7/8)	9.53 (3/8)	12.7 (1/2)	67.47 (2 21/32)	16 (5/8)	26.99 (1 1/16)	101.6 (4)	63.5 (2 1/2)	1-14UNS-2B X 1 1/4 DP	22.35 (7/8)


OUTLINE DIMENSIONS—SINGLE BRIDGE—500 TO 10K POUNDS

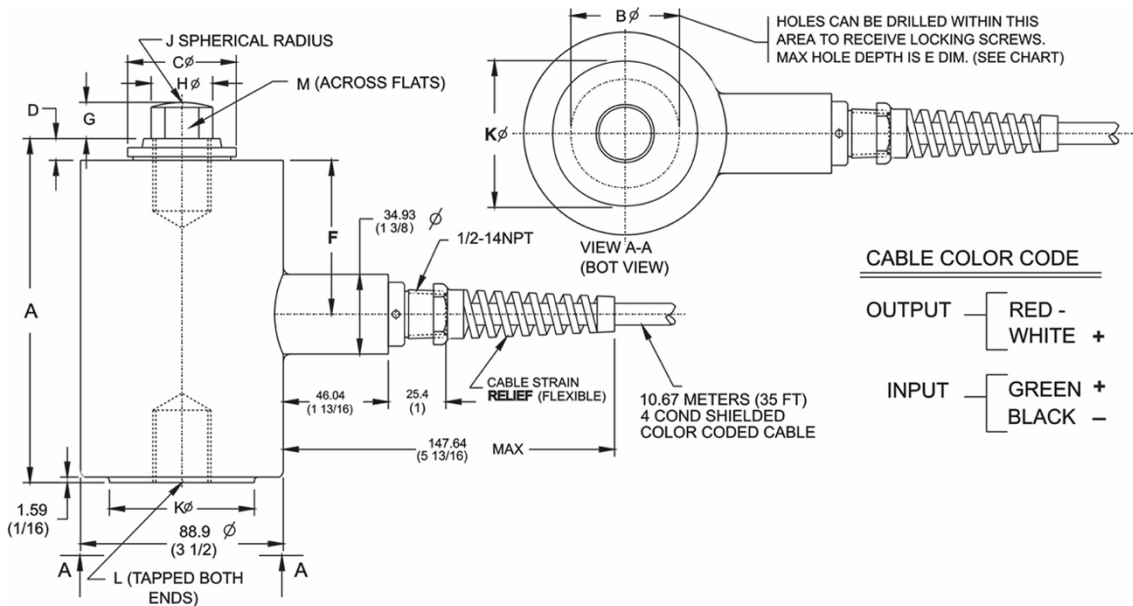

CAP.	KILOGRAMS (POUNDS)	A	B φ	C φ	D	E	F φ	G	H φ	J	K φ	L (TAPPED)	M
227 (500)	THRU 1361 (3000)	115.89 (4 9/16)	—	26.99 (1 1/16)	6.35 (1/4)	—	57.15 (2 1/4)	9.53 (3/8)	16 (5/8)	50.8 (2)	31.75 (1 1/4)	1/2-20UNF-2B X 1/2 DP	9.53 (3/8)
2268 (5000)	& 4536 (10000)	150.81 (5 15/16)	44.45 (1 3/4)	47.63 (1 7/8)	9.53 (3/8)	12.7 (1/2)	67.47 (2 21/32)	16 (5/8)	26.99 (1 1/16)	101.6 (4)	63.5 (2 1/2)	1-14UNS-2B X 1 1/4 DP	22.35 (7/8)

Compression Load Cells

OUTLINE DIMENSIONS - DOUBLE BRIDGE - 20K TO 50K POUNDS

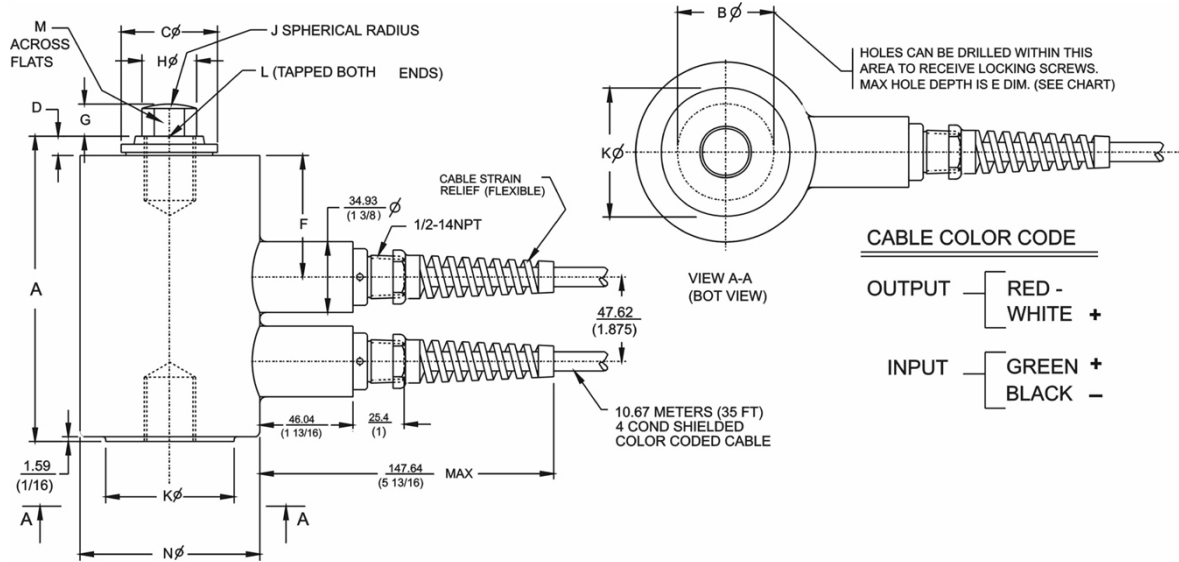


CABLE COLOR CODE

OUTPUT — RED - WHITE +
INPUT — GREEN + BLACK -

CAP.	KILOGRAMS (POUNDS)	A	B ϕ	C ϕ	D	E	F	G	H ϕ	J	K ϕ	L (TAPPED)	M	N ϕ
9072	THRU 13608	215.9	66.68	69.85	12.7	25.4	86.52	25.00	41.28	203.2	101.6	1 1/2-12UNF-2B X	31.75	127.0
(20,000)	(30,000)	(8 1/2)	(2 5/8)	(2 3/4)	(1/2)	(1)	(3 13/32)	(63/64)	(1 5/8)	(8)	(4)	1 3/4 DEEP	(1 1/4)	(5)
22680		290.51	95.25	101.6	15.88	25.4	113.50	25.00	57.15	203.2	146.05	2-12UN-2B X	44.45	165.1
(50,000)		(11 7/16)	(3 3/4)	(4)	(5/8)	(1)	(4 15/32)	(63/64)	(2 1/4)	(8)	(5 3/4)	2 1/4 DEEP	(1 3/4)	(6 1/2)

OUTLINE DIMENSIONS - DOUBLE BRIDGE - 100K POUNDS

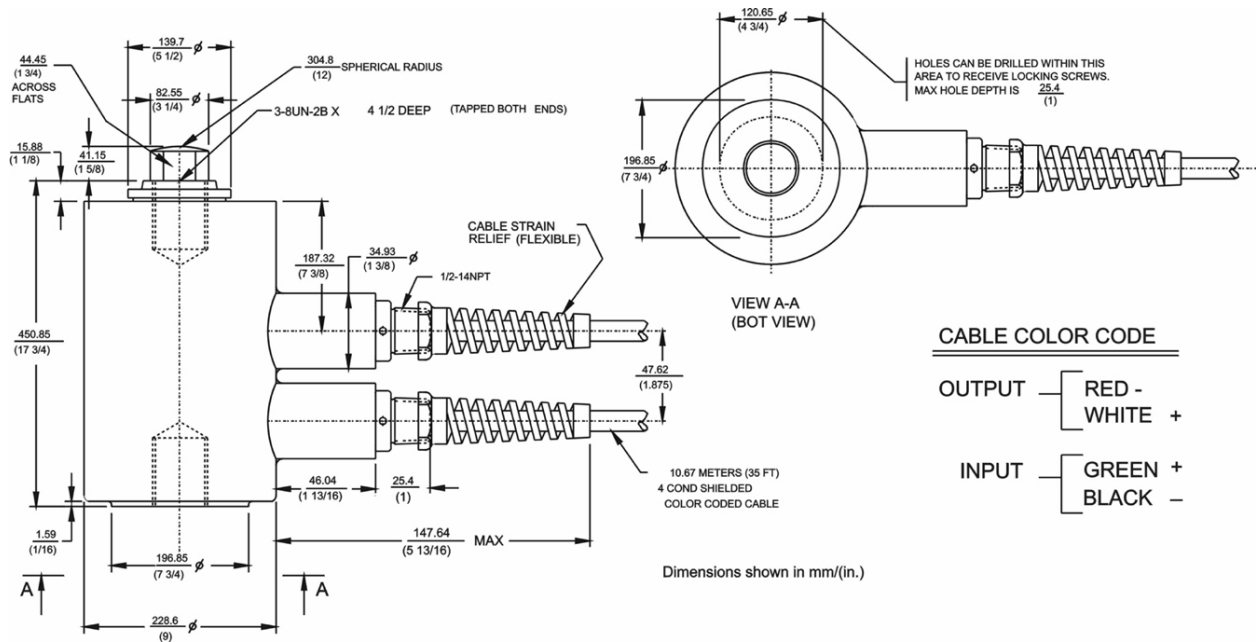

CABLE COLOR CODE

OUTPUT — RED - WHITE +
INPUT — GREEN + BLACK -

Dimensions shown in mm/(in.)

Compression Load Cells

SPECIFICATIONS		
PARAMETER	VALUE	
PERFORMANCE		
Capacities	500, 1K, 2K, 3K, 5K, 10K, 20K, 50K, and 100K lb (227, 454, 907, 1.4K, 2.27K, 4.54K, 9K, 13.6K, 22.7K, and 45.4K kg)	
Rated output (RO)	3.0 mV/V ($\pm 0.10\%$)	
Repeatability	0.02% RO	
Combined error	0.10% RO (500 lb)	0.07% RO (1K–100K lb)
Zero balance	1.0% RO	
Creep (20 minutes)	0.03% RO	
Temperature effects on zero balance	0.0015% RO/°F	
Temperature effects on rated output	0.0008% Load/°F	
ELECTRICAL		
Recommended excitation	10 VAC-DC	
Input resistance	350 Ω (± 3.5)	
Output resistance	350 Ω (± 3.5)	
Cable length	35 ft cable	
Number of bridges	single or double	
TEMPERATURE		
Safe range	–30°F to +175°F	
Compensated range	+30°F to +130°F	

PARAMETER	VALUE
ADVERSE LOAD RATINGS	
Safe overload	150% rated capacity
Ultimate overload	300% rated capacity
MATERIAL	
Element	High grade tool steel
Cannister	Low carbon steel, painted*
SEALING	
Environmental class	IP67
DEFLECTION	
500 lb	0.007 in
1K lb	0.006 in
2K, 3K lb	0.005 in
5K lb	0.007 in
10K lb	0.005 in
20K lb	0.007 in
50K lb	0.010 in
100K lb	0.013 in

* Single component, waterborne polyurethane copolymer—high gloss.

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.