

**Advanced Process Control Instruments Family**

**FEATURES**

- Wide variety of communication options: Ethernet, RS485, USB, Fieldbus, analog output
- Set-up and diagnostics through embedded web server
- Up to 8x 350 Ω load cells
- 24-bit resolution, 2400 samples per second, 300 updates per second.
- Easy parameters backup and restore via USB port, or SD card or internal memory.
- Flexible digital I/Os
- DIN rail mount enclosure

**APPLICATIONS**

- Process weighing and control
- Force measurement
- High speed dynamic measurement
- Factory automation

**DESCRIPTION**

The BLH Nobel G5 process control instrument offers high speed and high-performance control for industrial weighing and force measurement. G5 units set new performance standards geared towards your application demands of today while meeting tomorrow’s expanding requirements. G5 offers a highly flexible instrument for your process automation needs.

A built-in web server facilitates quick and easy operation and simplifies parameter changes through any web-supporting device. The web pages display weight and status, as well as parameters and diagnostics information.



Flexible digital inputs and outputs can be configured according to your specific needs.

Several industrial communication interfaces such as Ethernet, RS485 and optional fieldbuses are available, each complying with industry standard protocols. Analog output (current or voltage) is available as well.


Software upgrades can easily be installed in the field using a SD card.

The G5 durable plastic enclosure is IP20 rated for DIN rail mount installations.

The unit is designed for 24 Volt DC operation.

BLH Nobel designs and customizes software for special applications upon request. Contact BLH Nobel for more information.

**CONFIGURATION**

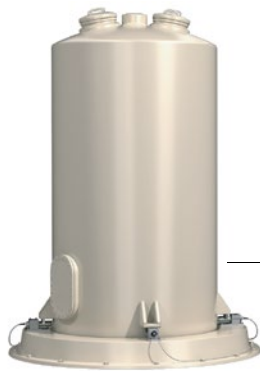

Vessel on 4 load cells



Junction box



G5 DIN rail Mount



PC or PLC interface

## Advanced Process Control Instruments Family

SPECIFICATIONS	
PARAMETER	VALUE
<b>WEIGHT/FORCE INPUT</b>	
Scale/platform support	Up to 8x 350 $\Omega$ load cells
Excitation	10 VDC
Load cell input range	$\pm 3$ mV/V
Sensitivity	0.3 $\mu$ V
A/D conversion	24 bits, 2400 samples/second
Update rate	300 updates/second
Zero drift	<10 nV/V/ $^{\circ}$ K
Span drift	<2 ppm/ $^{\circ}$ K
Filter	Digital, 0.125 Hz to 50 Hz bandwidth, damping >70 dB at 150 Hz
<b>INTERFACES</b>	
Ethernet	Process data and control, set-up and file transfer
Protocol	Modbus TCP, http, ftp
Set-up and diagnostics	Using web server
RS485 port	Isolated, for process data and control
Protocol	Modbus RTU
Baud rate	Up to 115 kbaud
Insulation	Operational
Field bus options	For process data and control
Protocol	ProfibusDP, PROFINET, DeviceNet, ControlNet, Ethernet/IP
USB	For parameters backup and restore
Type	Type 2
SD card slot	For files and program upgrade
<b>ANALOG OUTPUT</b>	
Current loop mode	4–20 mA, 0–20 mA, $\pm 20$ mA, max load—500 $\Omega$ , isolated
Voltage mode	0–10 V, $\pm 10$ V, min 1 k $\Omega$ load, isolated
<b>USER INTERFACE</b>	
Web browser	Operational data, setup and diagnostics
<b>DIGITAL I/O</b>	
Inputs	4, 24 VDC, common return, isolated
Outputs	4, 24 VDC, 0.1 A max, common return, isolated
<b>ENVIRONMENTAL CONDITIONS</b>	
Operating temperature	–10 to +55 $^{\circ}$ C, 14 to 131 $^{\circ}$ F
Storage temperature	–25 to +85 $^{\circ}$ C, –13 to 185 $^{\circ}$ F
Humidity	Up to 85%, non-condensing
Ingress protection	IP20
EMC, safety	CE (Industrial)
<b>POWER</b>	
DC power option	18–32 VDC, 12 W
<b>MECHANICAL INTERFACE</b>	
Enclosure type	DIN rail mount, plastic
Dimensions WxHxD	95 x 136 x 100 mm, 3.7 x 5.4 x 3.9 inch (not including mating connectors or cables)
<b>APPROVALS—CONTACT BLH NOBEL FOR DETAILS</b>	

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.