
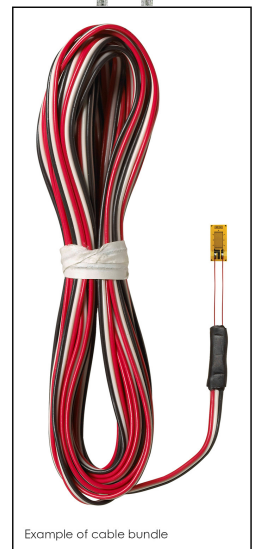


Customer Requirements

- Temperature range: $>-60^{\circ}\text{F}$ to $+180^{\circ}\text{F}$ (-50°C to $+80^{\circ}\text{C}$)
- Uniaxial strain pattern with a 0.125 inch active grid length and fully encapsulated
- Temperature compensated for Aluminum
- Resistance: $350\ \Omega$
- Leadwire: 10 ft of 326-DFV, preattached
- Elongation: $\pm 3\%$ ($30,000\ \mu\epsilon$) one time elongation; $\pm 1500\ \mu\epsilon$ for 10^6 cycles
- Pre-attached vinyl insulated cables makes installation fast and much easier



Applications


- Aerospace
- Automotive
- Other applications on aluminum alloys

Datasheet:
<http://www.vishaypg.com/doc?11200>



Customer Requirements

- Temperature range: $>-60^{\circ}\text{F}$ to $+180^{\circ}\text{F}$ (-50°C to $+80^{\circ}\text{C}$)
- Biaxial strain pattern (T-rosette) with a 0.125 inch active grid length and fully encapsulated
- Temperature compensated for Aluminum
- Resistance: $350\ \Omega$
- Leadwire: 10 ft of 326-DFV, preattached
- Elongation: $\pm 3\%$ ($30,000\ \mu\epsilon$) one time elongation; $\pm 1500\ \mu\epsilon$ for 10^6 cycles
- Pre-attached vinyl insulated cables makes installation fast and much easier



Applications

- Aerospace
- Automotive
- Other applications on aluminum alloys as well as pressure vessel and tank applications where maximum and minimum, or longitudinal and hoop, strain measurements are required



Datasheet:

<http://www.vishaypg.com/doc?11199>



Customer Requirements

- Temperature range: $>-100^{\circ}\text{F}$ to $+350^{\circ}\text{F}$ (-75°C to $+175^{\circ}\text{C}$)
- Three-element rectangular rosette pattern with a 0.125 inch active grid length and fully encapsulated
- Temperature compensated for Aluminum
- Resistance: $350\ \Omega$
- Large copper tabs allow for direct lead attachment
- Elongation: $\pm 3\%$ ($30,000\ \mu\epsilon$) one time elongation; $\pm 1500\ \mu\epsilon$ for 10^6 cycles
- Ideal for stress states where the magnitude and direction need to be determined
- Pre-attached vinyl insulated cables makes installation fast and much easier
- Three discrete measurements allow for calculation of maximum and minimum principal strains, direction, shear strains as well as tension/compression measurements

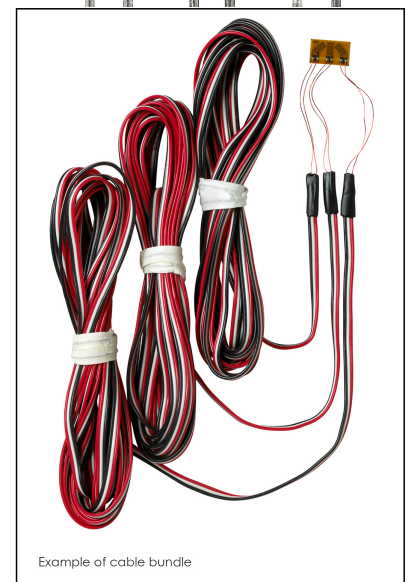

Applications

- Aerospace
- Automotive
- Other applications on aluminum alloys


Datasheet:

<http://www.vishaypg.com/doc?11198>



Customer Requirements

- Temperature range: $>-100^{\circ}\text{F}$ to $+350^{\circ}\text{F}$ (-75°C to $+175^{\circ}\text{C}$)
- Uniaxial strain pattern with a 0.125 inch active grid length and fully encapsulated
- Temperature compensated for Aluminum
- Resistance: $350\ \Omega$
- Large copper tabs allow for direct lead attachment
- Elongation: $\pm 3\%$ ($30,000\ \mu\epsilon$) one time elongation; $\pm 1500\ \mu\epsilon$ for 10^6 cycles

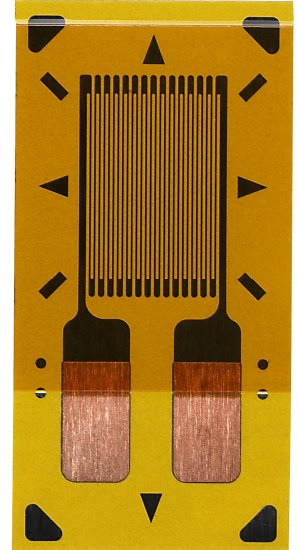

Applications

- Aerospace
- Automotive
- Other applications on aluminum alloys




Datasheet:

<http://www.vishaypg.com/doc?11224>

Customer Requirements

- Temperature range: $>-100^{\circ}\text{F}$ to $+350^{\circ}\text{F}$ (-75°C to $+175^{\circ}\text{C}$)
- Biaxial strain pattern (T-rosette) with a 0.125 inch active grid length and fully encapsulated
- Temperature compensated for Aluminum
- Resistance: $350\ \Omega$
- Large copper tabs allow for direct lead attachment
- Elongation: $\pm 3\%$ ($30,000\ \mu\epsilon$) one time elongation; $\pm 1500\ \mu\epsilon$ for 10^6 cycles
- Ideal for biaxial stress states where direction is known

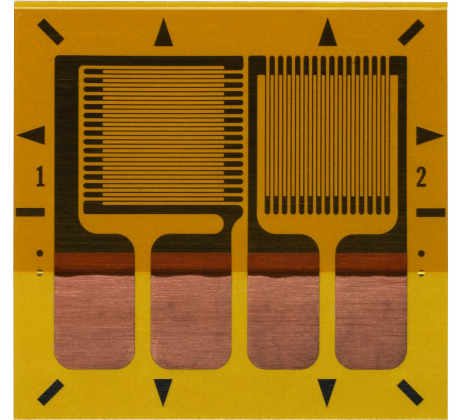

Applications


- Automotive
- Aerospace
- Other applications on aluminum alloys



Datasheet:
<http://www.vishaypg.com/doc?11230>

Customer Requirements

- Temperature range: $>-100^{\circ}\text{F}$ to $+350^{\circ}\text{F}$ (-75°C to $+175^{\circ}\text{C}$)
- Three-element rectangular rosette pattern with a 0.125 inch active grid length and fully encapsulated
- Temperature compensated for Aluminum
- Resistance: $350\ \Omega$
- Large copper tabs allow for direct lead attachment
- Elongation: $\pm 3\%$ ($30,000\ \mu\epsilon$) one time elongation; $\pm 1500\ \mu\epsilon$ for 10^6 cycles
- The three discrete measurements allow for calculation of maximum and minimum principal strains, direction, shear strains as well as tension/compression measurements

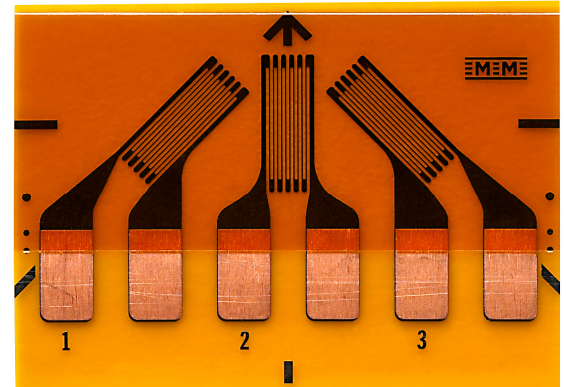

Applications

- Aerospace
- Automotive
- Other applications on aluminum alloys

Datasheet:

<http://www.vishaypg.com/doc?11225>

