

PROPRIETARY STATEMENT: ULTRAVOLT INC.  
CONFIDENTIAL DRAWING

2



B PART NUMBER: HS-018 REV B1 SH 1

REVISIONS

LTR	DESCRIPTION	BY	DATE	APPD
A	NEW RELEASE	D.S.	9/10/99	J.M.
B	REVISED PER ECO#UV3094	SRO	8/14/03	D.P.
B1	REVISED PER EC-00510-UV	JC	11/15/07	SRO

SEE NOTE 3  
FAR SIDE

4X Ø0.101  $\nabla$  THRU  $\sphericalangle$  Ø0.180 X 82°  
HOLE & C'SK TO BE CLEAR OF ANODIZE  
SEE DETAIL "A"

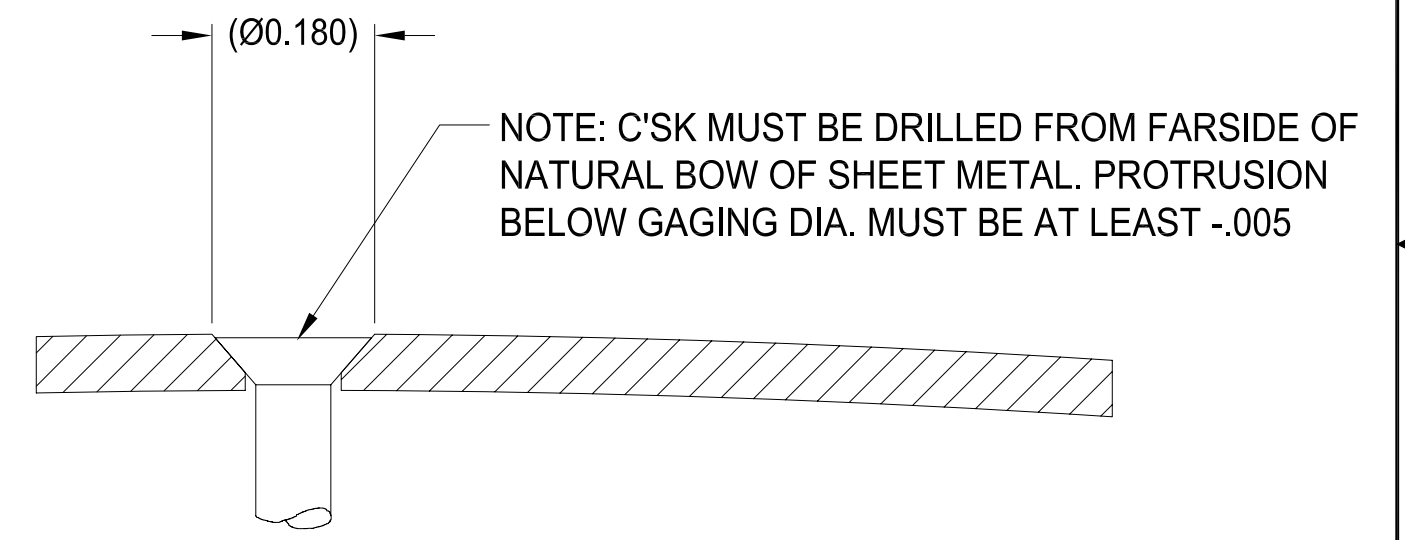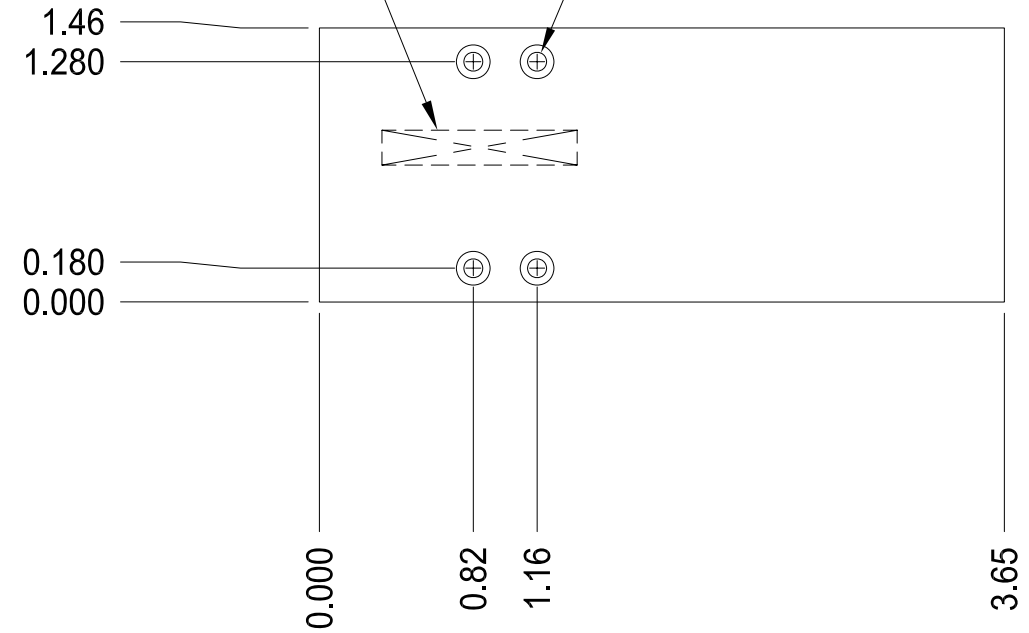

DETAIL 'A'

- NOTES:
- 1- MATERIAL: 0.062 THK ALUM ALLOY 5052-H32 PER QQ-A-250/8.
  - 2- FINISH: DARK BLACK MATTE ANODIZE PER MIL-A-8625, TYPE II, CLASS 2.
  - 3- MARK PART NUMBER AND REVISION. STAMP OR USE A NON-CONDUCTIVE INDELIBLE INK, (FREE OF CARBON) CONTRASTING COLOR, OR STAMP 0.09 - 0.125 HIGH CHARACTERS LOCATE APPROXIMATELY AS SHOWN, FAR SIDE. ie. XX-XXX\_revX
  - 4- REMOVE ALL BURRS AND SHARP EDGES.

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE:		CUSTOMER	
2 PL DEC ± .02	FRACT ± 1/64	DRAWN	D.S.
3 PL DEC ± .010	ANGLES ± 2°	CHKD	J.M.
HOLE DIA	TOLERANCES	MFG	J.S.O.
.0135 THRU .125	+ .004 - .004	MFG ENGR	G. Mc
.126 THRU .250	+ .005 - .005	PROCESS	N/A
.251 THRU .500	+ .006 - .006	QA	N/A
.501 THRU .750	+ .008 - .008	CHIEF ENG	F.G.
.751 THRU 1.000	+ .010 - .010	CFN: HS-018_revB1.dwg	
1.001 THRU 2.000	+ .012 - .012		
DASH NUMBER	NEXT ASSY	USED ON	
APPLICATION			

**ULTRAVOLT, INC.**  
1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779  
1-631-471-4444

HEAT SINK PLATE  
"A-C" AND "10A" SERIES

B PART NUMBER: HS-018 REV B1

SCALE NONE DO NOT SCALE THIS DRAWING SHEET 1 OF 1

2

1