


PROPRIETARY STATEMENT: ULTRAVOLT INC.  
CONFIDENTIAL DRAWING

2

B PART NUMBER: HS-044 REV A1 SH 1


REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPD
A	RELEASED TO DOC-CTRL	JC	4/26/07	SRO
A1	REVISED PER EC-00510-UV	JC	11/15/07	SRO

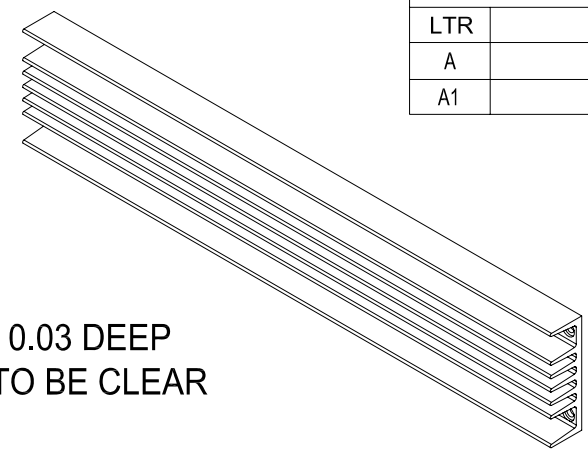

4X Ø0.106 THRU SPOTFACE Ø0.180 X 0.03 DEEP  
MAX NEARSIDE (HOLE & SPOTFACE TO BE CLEAR  
OF ANODIZE)

B

B

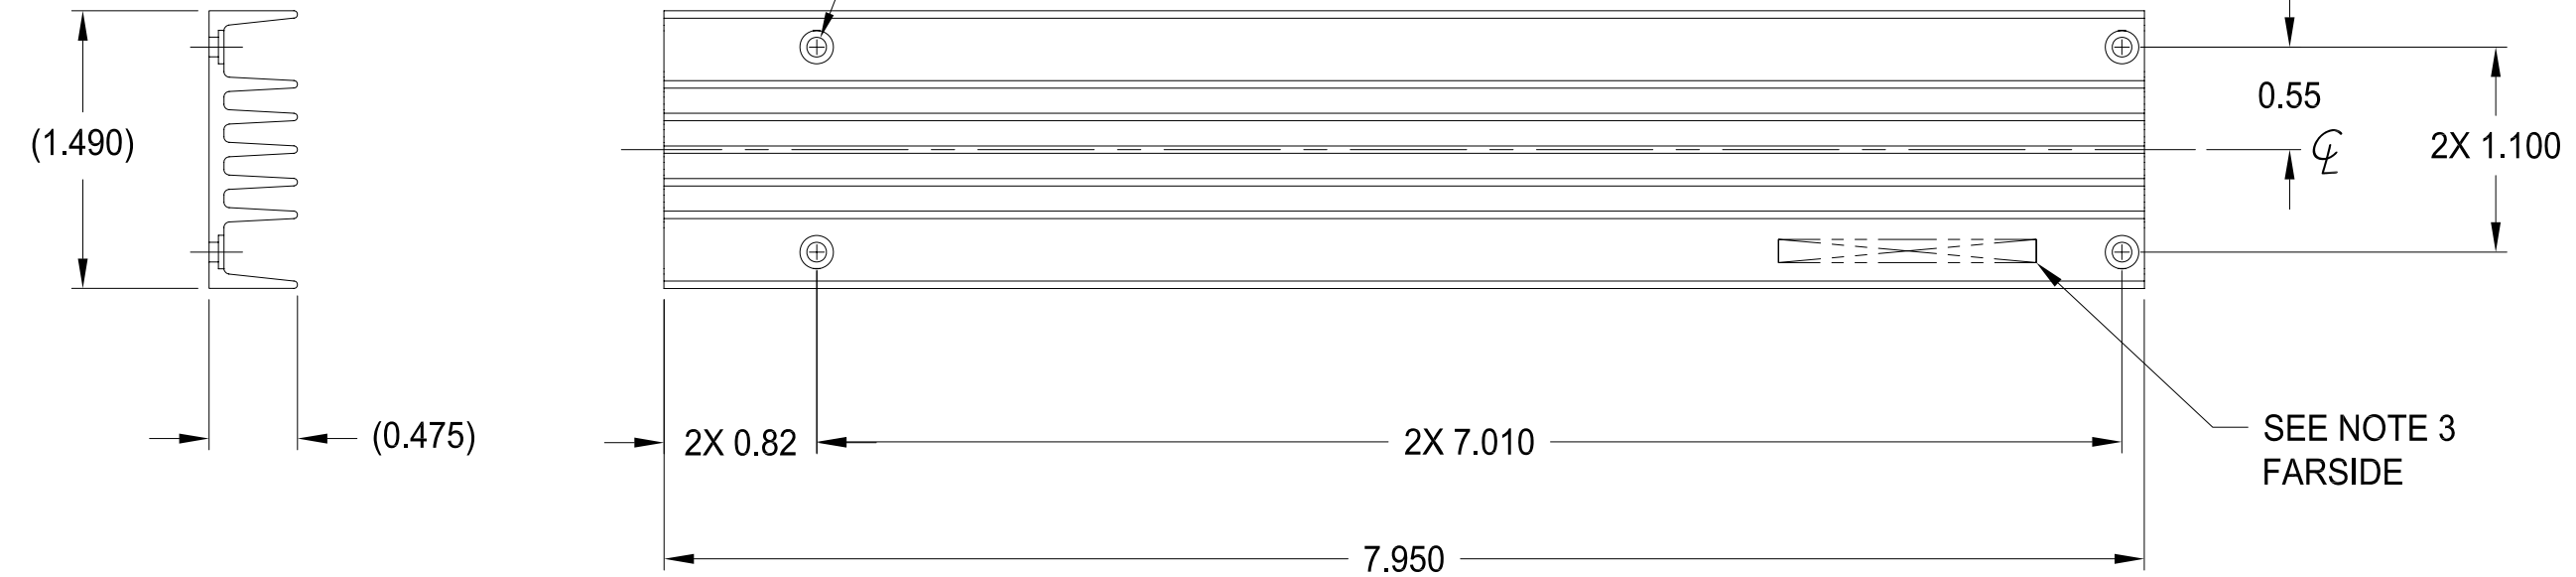

A

A

- NOTES:
- 1- MATERIAL: MAKE FROM ULTRAVOLT P/N: EX-001.
  - 2- FINISH: BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2.
  - 3- MARK PART NUMBER AND REVISION. STAMP OR USE A NON-CONDUCTIVE INDELIBLE INK, (FREE OF CARBON) CONTRASTING COLOR, OR STAMP 0.09 - 0.125 HIGH CHARACTERS LOCATE APPROXIMATELY AS SHOWN, FAR SIDE. ie. XX-XXX\_revX
  - 4- REMOVE ALL BURRS AND SHARP EDGES.
  - 5- EXPOSED SURFACE AREA WHEN MOUNTED = 53.28 in<sup>2</sup>
  - 6- WEIGHT OF HEATSINK 0.214 LBS.

SEE SEPARATE ENGINEERING MASTER

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE:		CUSTOMER	
2 PL DEC ± .02	FRACT ± 1/64	DRAWN	J. CAMPISI
3 PL DEC ± .010	ANGLES ± 2°	CHKD	S. ORBAN
		MFG	N/A
		MFG ENGR	S. ORBAN
		PROCESS	J. GOULDING
		QA	J. MORRISON
		CHIEF ENG	J. MORRISON
		CFN:	HS-044_revA1.dwg

HOLE DIA	TOLERANCES
.0135 THRU .125	+ .004 - .004
.126 THRU .250	+ .005 - .005
.251 THRU .500	+ .006 - .006
.501 THRU .750	+ .008 - .008
.751 THRU 1.000	+ .010 - .010
1.001 THRU 2.000	+ .012 - .012

DASH NUMBER	NEXT ASSY	USED ON
APPLICATION		

**ULTRAVOLT, INC.**  
1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779  
1-631-471-4444

HEATSINK, FINNED  
40A SERIES

B PART NUMBER: HS-044 REV A1

SCALE NONE DO NOT SCALE THIS DRAWING SHEET 1 OF 1

2

1