

0.00" 0.25" 0.50" 0.75" 1.00" 1.25" 1.50" 1.75" 2.00"


PROPRIETARY STATEMENT: ULTRAVOLT INC.
CONFIDENTIAL DRAWING

B PART NUMBER: OL-001 REV F SH 1

REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPD
A	NEW RELEASE	D.S.	2/4/99	J.M.
B	REVISED PER ECO #2137	D.S.	01-12-18	J.M.
C	REVISED PER ECO #2743	SRO	3/1/02	D.P.
D	REVISED PER ECO #JV3135	SG	11/25/03	SRO
E	REVISED PER ECO #JV3245	RG	10/7/05	SRO
F	REVISED PER EC-01036-UV	A.S.	07/26/10	GM

B

A

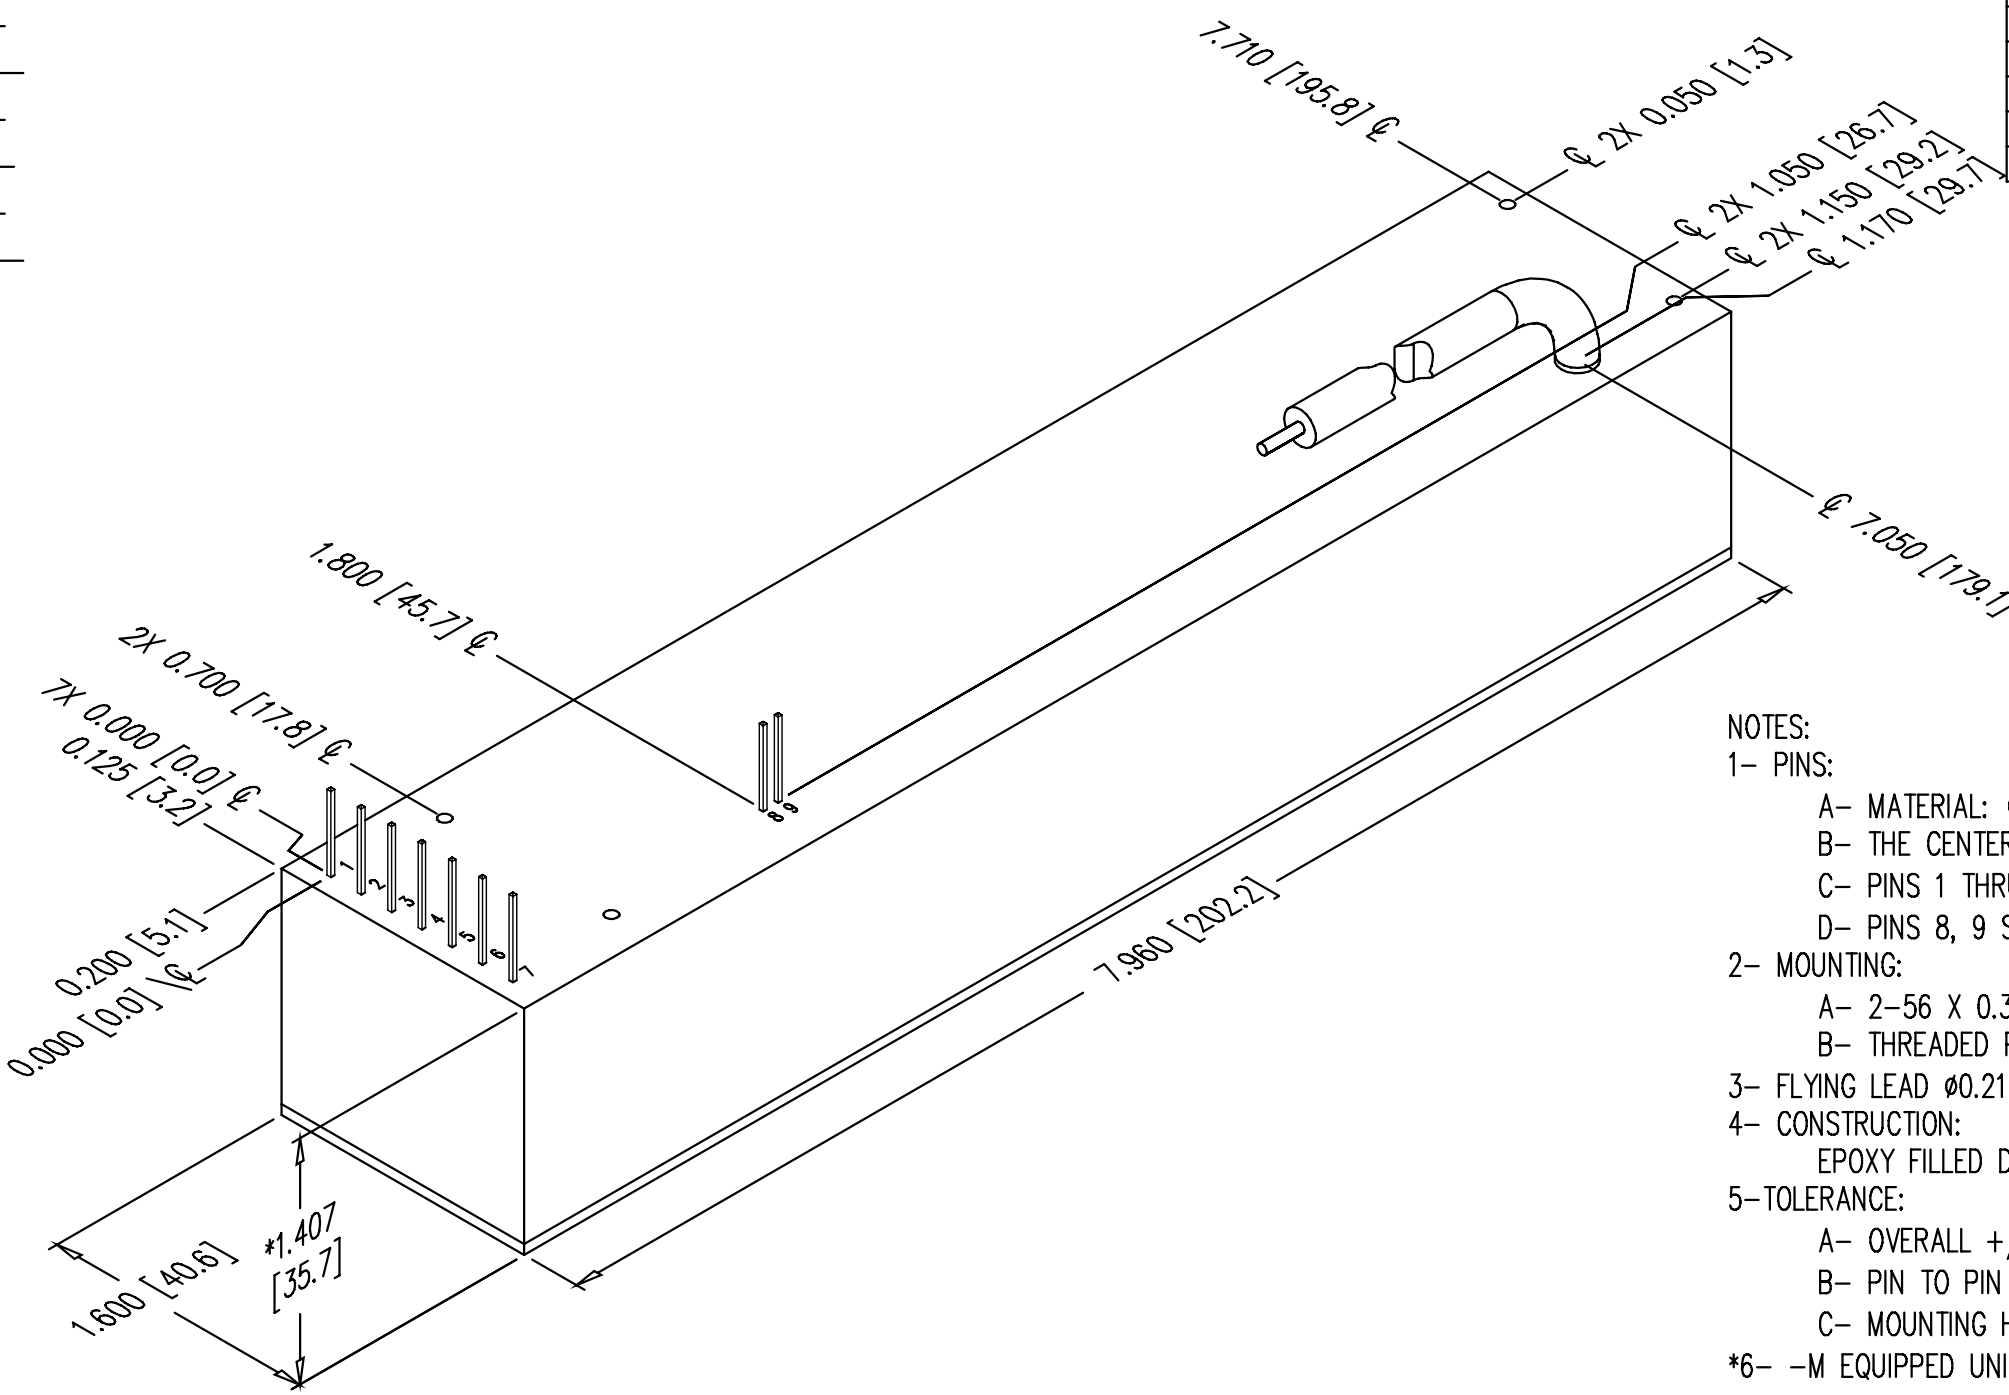

NOTES:

1- PINS:
 A- MATERIAL: GOLD PLATED 0.025 [0.64] SQ.
 B- THE CENTER OF THE PINS AND MOUNTING HOLES ARE LOCATED FROM THE CENTER OF PIN 1.
 C- PINS 1 THRU 7 SPACING 0.200 [5.08] ON CENTER, HEIGHT FROM COVER 0.470 [11.7] MIN
 D- PINS 8, 9 SPACING 0.100 [2.54] ON CENTER, HEIGHT FROM COVER 0.470 [11.7] MIN

2- MOUNTING:
 A- 2-56 X 0.30 [7.62] DP UNC-2B THD 4 PLACES.
 B- THREADED POST MAY NOT BE FLUSH TO COVER.

3- FLYING LEAD ϕ 0.210 [ϕ 5.3] MAX. APPROX. 18.00 [457.2] LONG

4- CONSTRUCTION:
 EPOXY FILLED DAP BOX CERTIFIED TO ASTM-D-5948

5-TOLERANCE:
 A- OVERALL +/-0.050 [1.27]
 B- PIN TO PIN +/-0.015 [.38]
 C- MOUNTING HOLE LOCATION +/- 0.025 [0.64]

*6- -M EQUIPPED UNITS ARE AN ADDITIONAL 0.030 [.76] IN HEIGHT.



UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE: 2 PL DEC ± .02 FRACT ± 1/64 3 PL DEC ± .010 ANGLES ± 2'			CUSTOMER		ULTRAVOLT, INC. 1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779 1-631-471-4444 OUTLINE 40A SERIES		
HOLE DIA			DRAWN <i>S. Orban</i> DATE 02/04/02 CHKD <i>D. Parant</i> 3/20/02	MFG <i>N/A</i> MFG ENGR <i>N/A</i> PROCESS <i>N/A</i> QA <i>N/A</i> CHIEF ENG <i>N/A</i>			
.0135 THRU .125			B PART NUMBER: OL-001 REV F				
.126 THRU .250							
.251 THRU .500							
.501 THRU .750							
.751 THRU 1.000			CFN: OL-001_revF_40A.dwg		SCALE NONE	DO NOT SCALE THIS DRAWING	SHEET 1 OF 1
1.001 THRU 2.000							
DASH NUMBER	NEXT ASSY	USED ON	APPLICATION				

2

1