


PROPRIETARY STATEMENT: ULTRAVOLT INC.
CONFIDENTIAL DRAWING

REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPD
1	NEW RELEASE	J.T.	4/5/01	J.M.
A	REVISED PER ECO #2743	SRO	3/1/02	D.P.
B	REVISED PER ECO #UN3136	SG	11/26/03	SRO
C	REVISED PER ECO #UV3245	RG	10/11/05	S.O.
C1	REVISED PER EC-00696-UV	SRO	4/17/08	JC

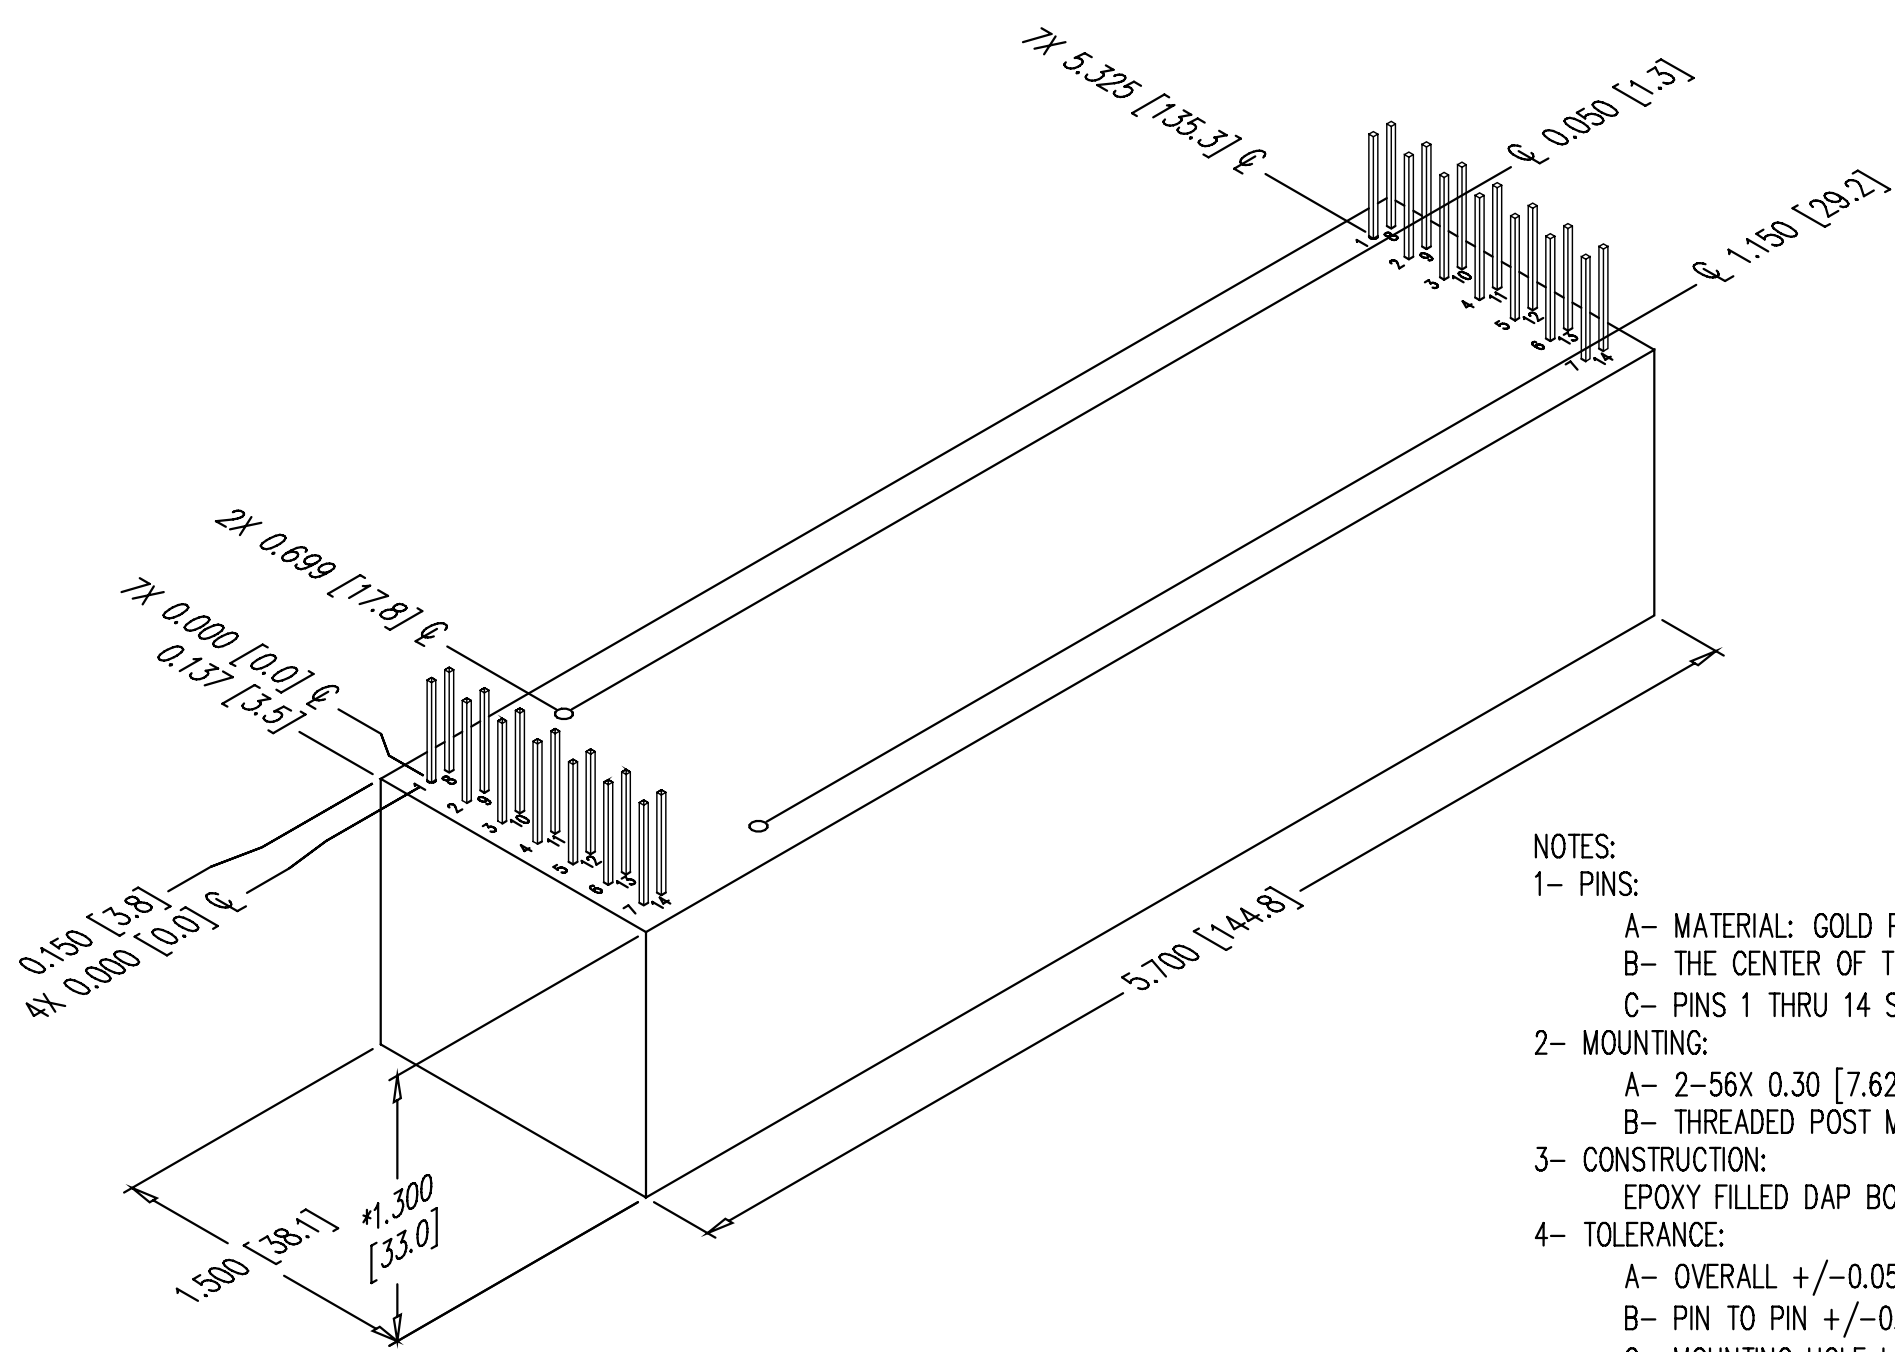

NOTES:

- 1- PINS:
 - A- MATERIAL: GOLD PLATED 0.025 [0.64] SQ.
 - B- THE CENTER OF THE PINS AND MOUNTING HOLES ARE LOCATED FROM CENTER OF PIN 1.
 - C- PINS 1 THRU 14 SPACING 0.100 [2.54] X 0.200 [5.08] ON CENTER, HEIGHT FROM COVER 0.300 [7.6] MIN
- 2- MOUNTING:
 - A- 2-56X 0.30 [7.62] DP UNC-2B THD 2 PLACES.
 - B- THREADED POST MAY NOT BE FLUSH TO COVER.
- 3- CONSTRUCTION:
 - EPOXY FILLED DAP BOX CERTIFIED TO ASTM-D-5948
- 4- TOLERANCE:
 - A- OVERALL +/-0.050 [1.27].
 - B- PIN TO PIN +/-0.015 [0.38].
 - C- MOUNTING HOLE LOCATION +/- 0.025 [0.64].
- *5- 24 WATT VERSIONS ARE AN ADDITIONAL 0.062 [1.57] IN HEIGHT.
- *6- -M EQUIPPED UNITS ARE AN ADDITIONAL 0.030 [0.76] IN HEIGHT.

B

B

A

A

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE: 2 PL DEC ± .02 FRACT ± 1/64 3 PL DEC ± .010 ANGLES ± 2'			CUSTOMER		ULTRAVOLT, INC. 1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779 1-631-471-4444	
			DRAWN	S. Orban		DATE
HOLE DIA			CHKD	D. Parant	3/20/02	
			MFG	N/A		
TOLERANCES			MFG ENGR	N/A		
			PROCESS	N/A		
DASH NUMBER			QA	N/A		
			CHIEF ENG	N/A		
NEXT ASSY			CFN: OL-034_revC1_15FL-RB_15EFL-RB.dwg		B PART NUMBER: OL-034 REV C1	
			APPLICATION			SCALE

2

1