

DYNAMIC MICROPHONE

MH-31A8J

Technical Supplement

©2003 VERTEX STANDARD CO., LTD. Printed in Japan.

E068790A

VERTEX STANDARD CO., LTD.
4-8-8 Nakameguro, Meguro-Ku, Tokyo 153-8644, Japan

VERTEX STANDARD

US Headquarters
10900 Walker Street, Cypress, CA 90630, U.S.A.

International Division
8350 N.W. 52nd Terrace, Suite 201, Miami, FL 33166, U.S.A.

YAESU EUROPE B.V.


P.O. Box 75525, 1118 ZN Schiphol, The Netherlands

YAESU UK LTD.

Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.

VERTEX STANDARD HK LTD.

Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,
Kwun Tong, Kowloon, Hong Kong

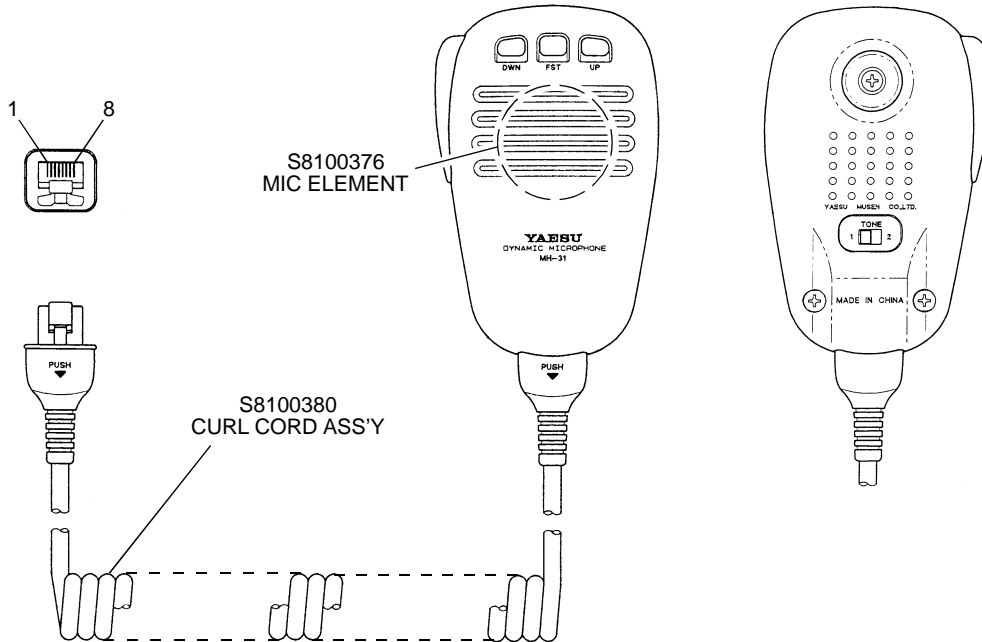

Specifications

- Microphone Type:** Dynamic
- Microphone Impedance:** 190-ohm $\pm 30\%$ at 1 kHz (tone 1)
- Microphone Sensitivity:** -78 dB ± 3 dB at 1 kHz, 0 dB = 1 V / 0.1 Pa (tone 1)
- Audio Tone Response:** tone1, full range
tone2, -14 dB ± 3 dB at 100 Hz
- Weight (approx.):** 183 g.

Circuit Diagram

