




TOP VIEW

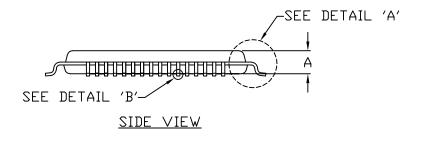


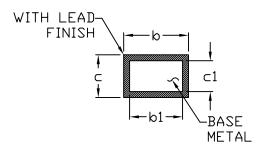

LEAD TIP DETAIL
DETAIL 'B'

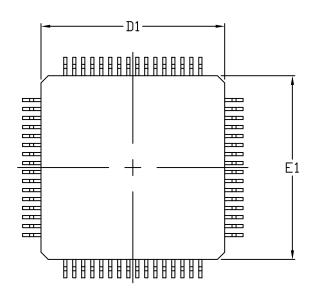

BOTTOM VIEW

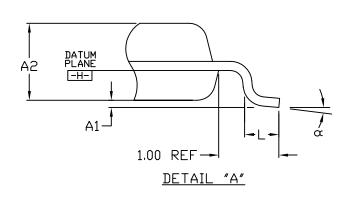



TITLE:

PACKAGE DUTLINE, 64L LQFP, 10×10×1.4mm

APPROVAL

DOCUMENT CONTROL NO. 21-0083

REV. 1

-DRAWING NOT TO SCALE-

## NOTES:

- 1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5-1982.
- 2. DATUM PLANE HE IS LOCATED AT MOLD PARTING LINE AND COINCIDENT WITH LEAD, WHERE LEAD EXITS PLASTIC BODY AT BOTTOM OF PARTING LINE.
- 3. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION IS 0.25 MM ON D1 AND E1 DIMENSIONS.
- 4. THE TOP OF PACKAGE IS SMALLER THAN THE BOTTOM OF PACKAGE BY 0.15 MILLIMETERS.
- 5. DIMENSION & DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 MM TOTAL IN EXCESS OF THE & DIMENSION AT MAXIMUM MATERIAL CONDITION.
- 6. ALL DIMENSIONS ARE IN MILLIMETERS.
- 7. THIS DUTLINE CONFORMS TO JEDEC PUBLICATION 95, REGISTRATION MS-026, VARIATION BCD.
- 8. LEADS SHALL BE COPLANAR WITHIN .004 INCH.
- A MARKING SHOWN IS FOR PACKAGE DRIENTATION REFERENCE ONLY.
- 10. ALL DIMENSIONS APPLY TO BOTH LEADED (-) AND PhREE (+) PACKAGE CODES.

JEDEC VARIATION		
	BCD	
	64 LEAD	
	MIN.	MAX.
Α	-	1.60
A1	0.05	0.15
A2	1.35	1.45
D	11.80	12.20
D1	9.80	10.20
Ш	11.80	12,20
E1	9.80	10.20
ω	0.50 BSC.	
لـ	0.45	0.75
ک	0.17	0.27
b1	0.17	0.23
U	0.09	0.20
⊂1	0.09	0.16
B	0 <b>°</b>	7 <b>°</b>
PKG. C64-1; C64-5; CDDES C64-8; C64-12;		



TITLE:

PACKAGE DUTLINE, 64L LQFP, 10×10×1.4mm

APPROVAL

DOCUMENT CONTROL NO. 21-0083

REV.