

## MAX25232 Evaluation Kit

Evaluates: MAX25232

### General Description

The MAX25232 evaluation kit (EV kit) provides a proven design to evaluate the MAX25232 2.1MHz/400kHz high-voltage mini-buck converter in a 12-pin side-wettable TDFN package. All components are rated for the automotive temperature range. Various test points and jumpers are included for evaluation.

The standard EV kit comes with the MAX25232ATCA/V+ installed (5V, 2.1MHz), but it can also be used to evaluate other MAX25232 variants with minimal component changes (e.g., IC replacement of U1).

### Benefits and Features

- 3.5V to 36V Input Supply Range
- 5V or 3.3V Fixed Output Voltage, or Adjustable Between 1V and 10V
- Delivers Up to 2.5A Output Current
- Frequency-Synchronization Input
- Enable Input
- Voltage-Monitoring PGOOD Output
- Proven PCB Layout
- Fully Assembled and Tested

### Quick Start

#### Required Equipment

- MAX25232 EV kit
- Power supply
- Voltmeter
- Electronic load

#### Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation:

- 1) Verify that all jumpers are in their default positions, as shown in [Table 1](#).
- 2) Connect the positive and negative terminals of the power supply to the SUP and GND test pads, respectively.
- 3) Connect the positive terminal of the voltmeter to OUT and the negative terminal to GND2.
- 4) Set the power supply to 14V and 2A current limit. Turn on the power supply.
- 5) With the PU and LED headers shorted, the green LED lights up. The voltmeter should display an output voltage of 5V.

**Ordering Information** appears at end of data sheet.

**Table 1. Default Jumper Settings**

JUMPER	SHUNT POSITION	FUNCTION
EN	ON-Middle	Buck controller enabled
SPS	Middle-OFF	Spread spectrum disabled
PU, LED	Installed	PGOOD is pulled up by $V_{BIAS}$ when OUT is in regulation
SYNC	Middle-FPWM	Forced-pulse-width-modulation (PWM) mode

### Detailed Description

The MAX25232 EV kit provides a proven layout for evaluating all variants of the MAX25232 family of small, current-mode-controlled buck converter ICs. Each device accepts input voltages as high as 36V and delivers up to 2.5A. The EV kit can handle an input-supply transient up to 40V.

### Switching Frequency and External Synchronization

The ICs can operate in two modes, forced-PWM or skip. Skip mode has better efficiency for light-load conditions. When SYNC is pulled low, the device operates in skip mode for light loads, and in PWM mode for larger loads. When SYNC is pulled high, the device is forced to operate in PWM across all load conditions.

SYNC can be used to synchronize with other supplies if a clock source is present. The device is forced to operate in PWM when SYNC is connected to a clock source.

### Buck Output Monitoring (PGOOD)

The EV kit provides a power-good output test point (PGOOD) to monitor the status of the buck output (OUT). PGOOD is low impedance when the output voltage is in

regulation. PGOOD is high impedance when the output voltage drops below 8% (typ) of its nominal regulated voltage.

To obtain a logic signal, pull up PGOOD to  $V_{BIAS}$  by installing shunts on jumpers PU and LED.

### Evaluating Other Variants

The EV kit comes installed with the fixed-output, 5V/2.1MHz variant (MAX25232ATCA/V+). The 2.1MHz and 400kHz variants can be installed and tested with minimal component changes. For the 2.1MHz variants, install the appropriate IC on the EV kit (U1), while keeping all other components the same. For 400kHz parts, the inductor should be increased to 10 $\mu$ H, and the output capacitance must be a minimum 44 $\mu$ F after derating is accounted for.

### Setting the Output Voltage in the Buck Converters

The output voltage in MAX25232 comes fixed internally. Order the corresponding variant to get the desired output voltage (5V/3.3V). For other output voltage settings, contact the factory.

### Ordering Information


PART	TYPE
MAX25232EVKIT#	5V output, 2.1MHz EV kit

#Denotes RoHS compliant.


## MAX25232 EV Kit Bill of Materials

DESIGNATION	QTY	DESCRIPTION
C1	1	4.7 $\mu$ F $\pm$ 10%, 50V X7R ceramic capacitors (1210) TDK CGA6P3X7R1H475K250AB
C2	1	47 $\mu$ F, 50V aluminum electrolytic capacitor (8.3mm x 8.3mm) Panasonic EEE-FK1H470P
C3, C4, C5	3	10 $\mu$ F $\pm$ 10%, 25V X7R ceramic capacitor (1206) Taiyo Yuden TMJ316BB7106KLHT
C7	1	1 $\mu$ F $\pm$ 10%, 35V X7R ceramic capacitor (0603) TDK CGA3E1X7R1V105K080AC
C8	1	0.1 $\mu$ F $\pm$ 10% 50V X7R ceramic capacitor (0402) TDK CGA2B3X7R1H104K
C10, C11	2	2.2 $\mu$ F $\pm$ 10% 50V X7R ceramic capacitor (1210) TDK CGA6M3X7R1H225K200AB
DS1	1	Green LED (0603) Lite-On Electronics LTST-C191KGKT
EN, SPS, SYNC	3	3-pin headers (0.1" spacing)
L1	1	2.2 $\mu$ H Power Inductor Coilcraft XFL5030-222
L2	1	2A Ferrite Bead (1210) Taiyo Yuden FBMH3225HM102NT
PU, LED	2	2-pin headers (0.1" spacing)
R2	2	0 $\Omega$ resistor (0603)
R3	1	3k $\Omega$ $\pm$ 5% resistor (0603)
U1	1	Automotive Mini-Buck Maxim MAX25232ATCA/V+
—	5	Shunt Jumper (0.1" spacing, Black)
—	1	PCB: MAX25232 Evaluation Kit


MAX25232 EV Kit Schematic

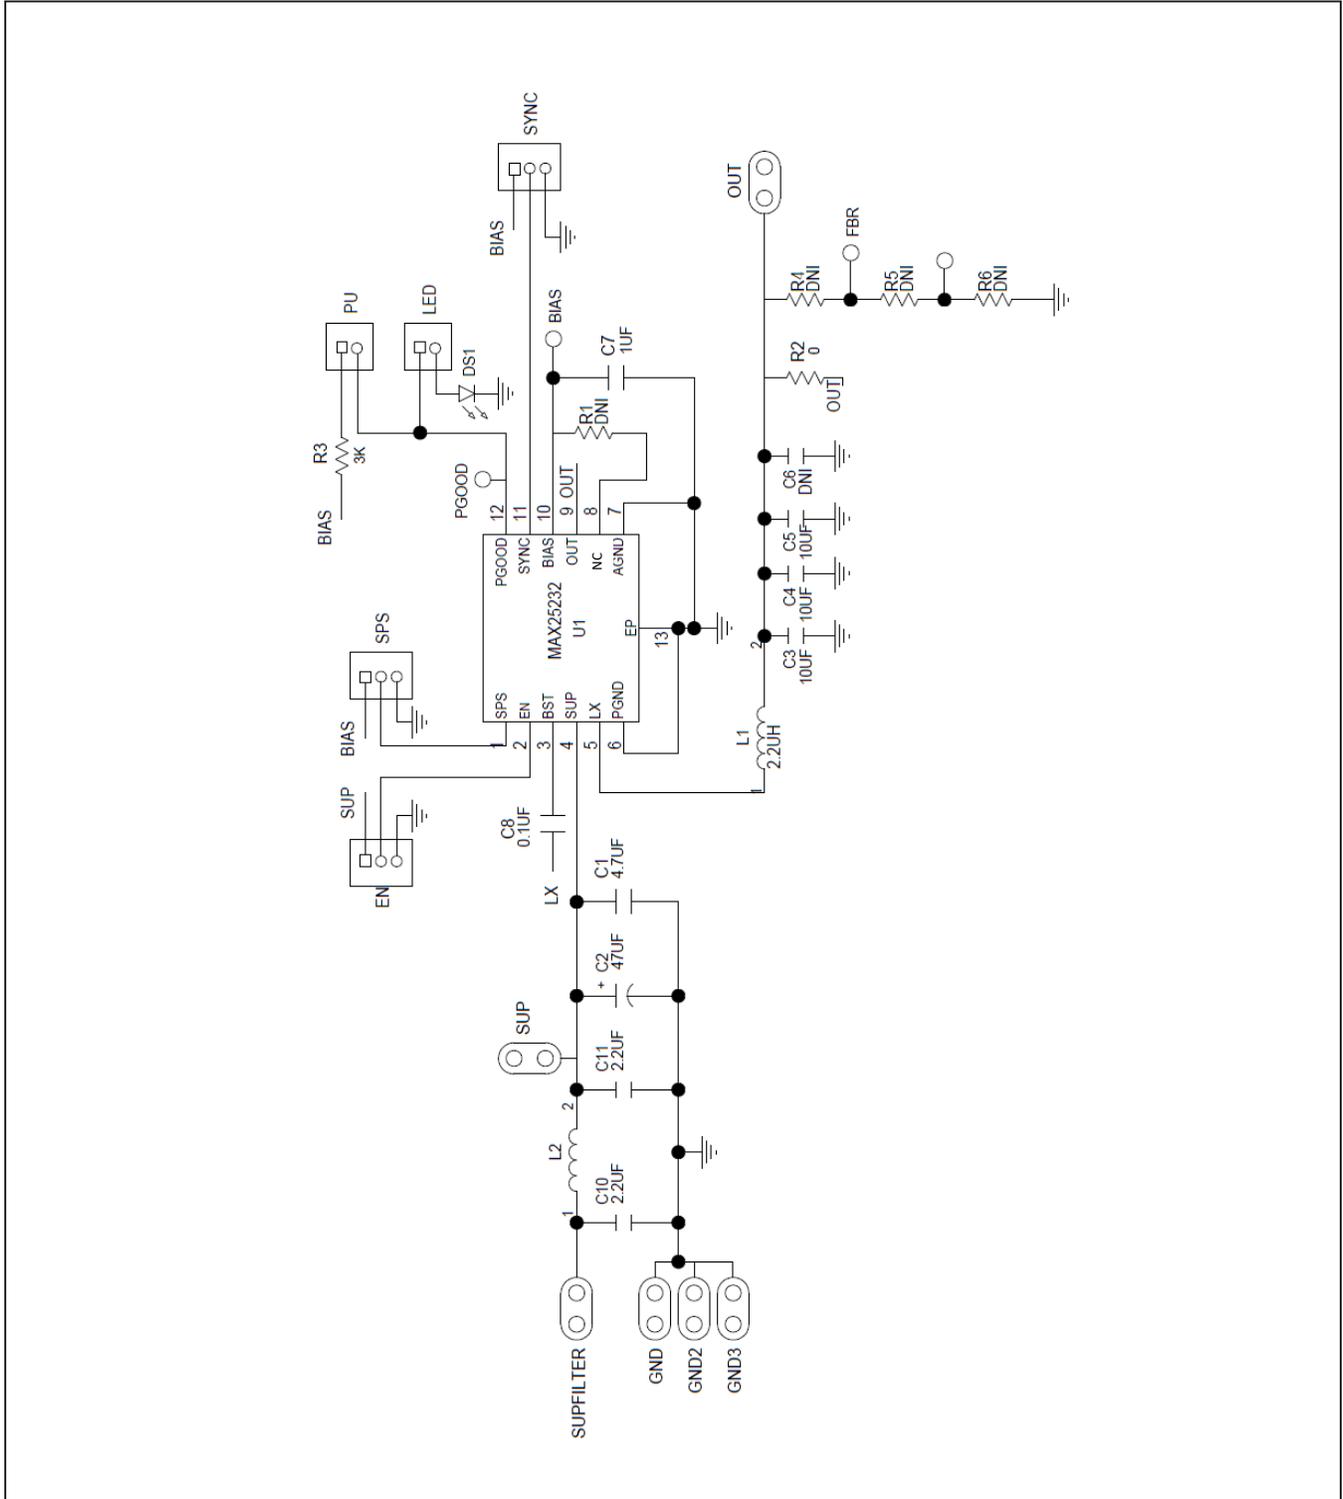


MAX25232 EV Kit PCB Layouts

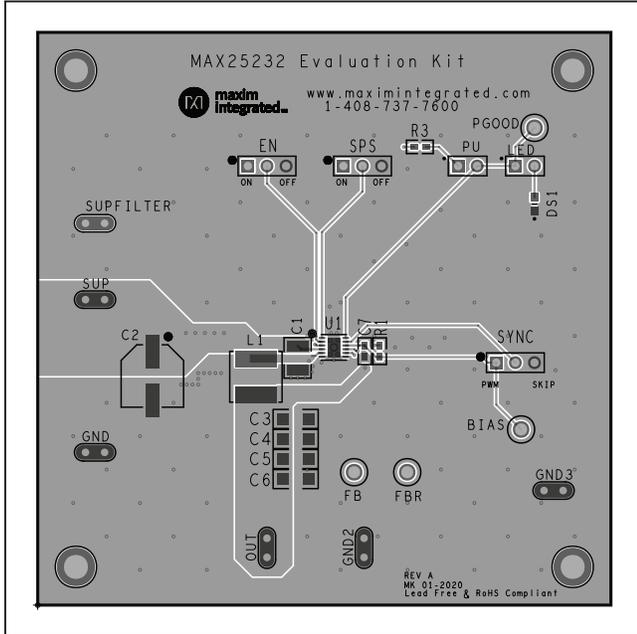


MAX25232 EV Kit Component Placement Guide—Top View

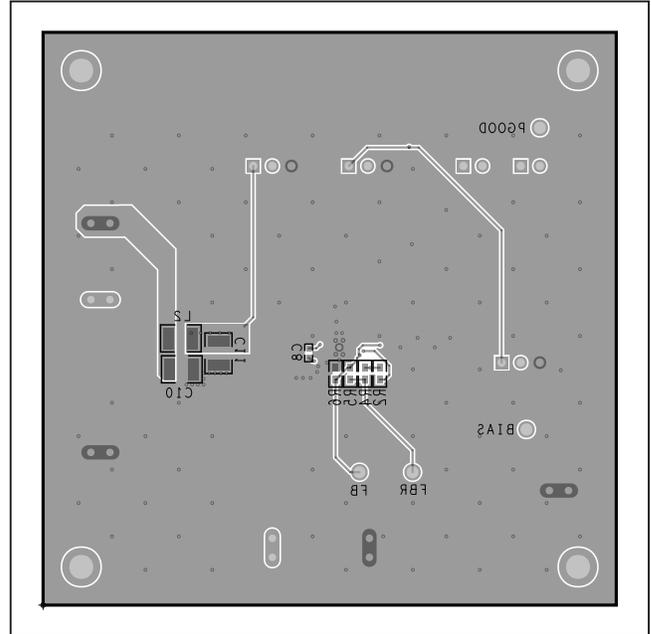

MAX25232 EV Kit Component Placement Guide—Bottom View

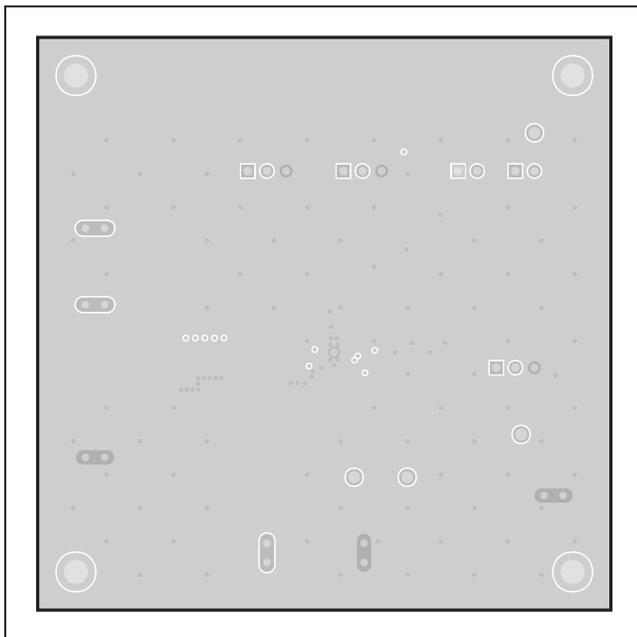

MAX25232 EV Kit PCB Layout—Internal Layer 2

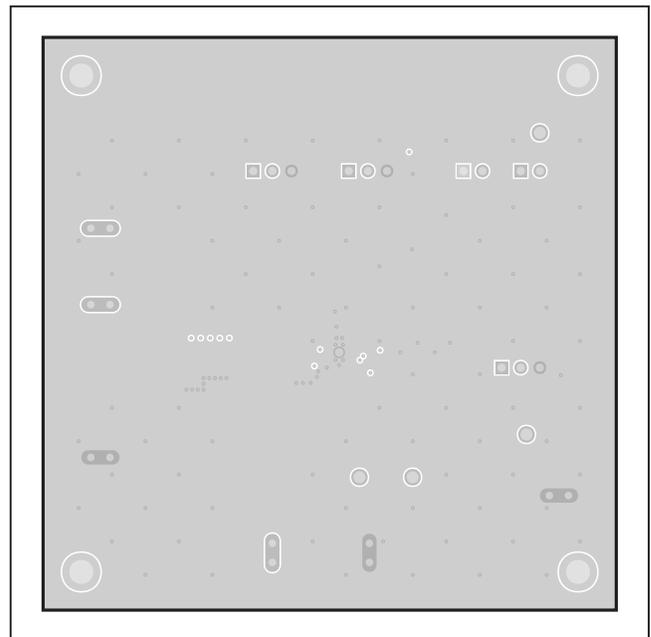

MAX25232 EV Kit PCB Layout—Internal Layer 3

## Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	5/20	Initial release	—

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*