

AN-1566 Techniques for Thermal Analysis of Switching Power Supply Designs

ABSTRACT

This application note provides thermal power analysis techniques for analyzing the power IC.

Contents

1	Introduction	2
2	The Analytical Approach	2
3	The Simulation Approach	3
4	The Hands-On Approach	4
5	The Choice is Yours	4

List of Figures

1	Typical Efficiency at 5V V_{OUT} vs I_{OUT} and V_{IN}	3
2	Thermal Simulation with WebTHERM.....	3

WebTHERM is a trademark of Texas Instruments.
SIMPLE SWITCHER, WEBENCH are registered trademarks of Texas Instruments.
All other trademarks are the property of their respective owners.

1 Introduction

To reduce time-to-market and component count, power management ICs with integrated power transistors such as Texas Instruments new SIMPLE SWITCHER® regulators (LM5576, LM25576, and others) are often preferred over controllers with external FETs. However, with the power transistor on-board, it's important to do careful thermal analysis of the power IC to make sure the silicon temperature does not exceed the maximum allowable junction temperature. Integrated circuits are rated up to a maximum 'die' temperature. Operation at higher temperatures will put the IC out of specification and possibly destroy it.

There are three main ways of thermally analyzing a given design. The following article explains the different approaches, and discusses the precision of each approach.

2 The Analytical Approach

The analytical approach is a good way to get a rough estimate of the die temperature of a given switching regulator. One approach is to calculate the losses the switching regulator IC generates. For step down regulators the following formulas can be used.

There are bias losses which are mainly the ground pin current times the input voltage:

$$P_{\text{bias}} = I_q \cdot V_{\text{IN}} \quad (1)$$

The power conduction losses are the losses of the built in transistors while fully turned on and a rough estimation is:

$$P_{\text{cond}} = \text{duty cycle} \cdot R_{\text{dson}} \cdot I_{\text{OUT}}^2 \quad (2)$$

The switching losses are the losses that occur during the transition times of the internal transistor before and after the on time and can be estimated by:

$$P_{\text{switch}} = (I_{\text{OUT}} \cdot V_{\text{IN}}) / 2 \cdot F \cdot (t_{\text{LH}} + t_{\text{HL}}) \quad (3)$$

Where F is the switching frequency and tLH and tHL are the transition times from low to high or high to low.

All the individual losses are sometimes difficult to calculate due to incomplete information regarding parameters such as the exact rise time, exact R_{dson} during the on time and other parasitics which are not easily characterized. Sometimes it is easier to take the overall efficiency of a given power converter board and to subtract the losses of the external components such as the external Schottky diode, the inductor, current flowing through the external resistive divider, and possibly the capacitors depending on the ESR.

Once we know the losses of the switching regulator IC, the thermal analysis can be started. The individual data sheets give the thermal resistance from the junction of the IC to case (or PCB), which is referred to as θ_{JC}. The units are degrees centigrade per Watt, and knowing the ambient temperature as well as the dissipated power on the die gives the temperature of the die. The resistance value θ_{JC} has a lot to do with the package the silicon is housed in but it also includes the size of the die, the die attach material, and bond wire type and number. This is the reason why there is not one θ_{JC} per package type, and why the junction to resistance has to be thermally measured with each individual newly released IC product.

The junction to ambient thermal resistance, θ_{JA}, depends greatly on the design of the printed circuit board around the IC. Generally, data sheets give information about the PCB and layout situation in which the given thermal resistance is valid.

The precision of the analytical approach depends greatly on the complexity of the formulas as well as on the precision of data of components available to the designer. In many cases, it is more precise to use a practical approach with measurements in the lab rather than mathematical models which lack accuracy due to many unknowns.

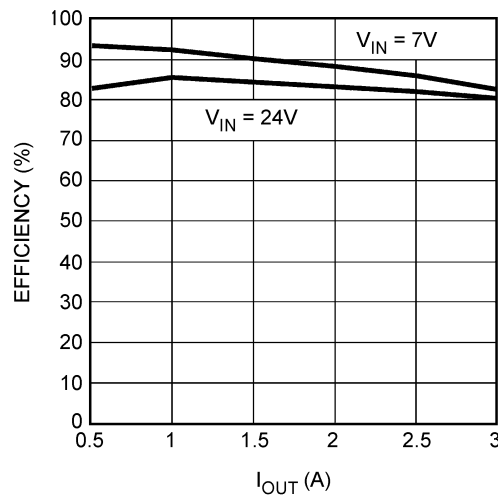


Figure 1. Typical Efficiency at 5V V_{OUT} vs I_{OUT} and V_{IN}

3 The Simulation Approach

To simplify thermal predictions, Texas Instruments WEBENCH® online simulation tool includes a module called WebTHERM™ which offers thermal modeling of many switching regulator ICs, including Texas Instruments new LM557x and LM2557x SIMPLE SWITCHER® regulators. The thermal simulation results are given in a colorful thermal graph where hotspots can easily be detected and the temperature of each point on the board can be found. Heat sinks can be added to improve thermal dissipation. Also, airflow can be adjusted using fans from different directions. Figure 2 shows a screenshot of a thermal simulation result with WebTHERM. This approach is very simple and gives a good idea of how heat dissipates across a board. It also helps to understand where hotspots exist in individual designs.

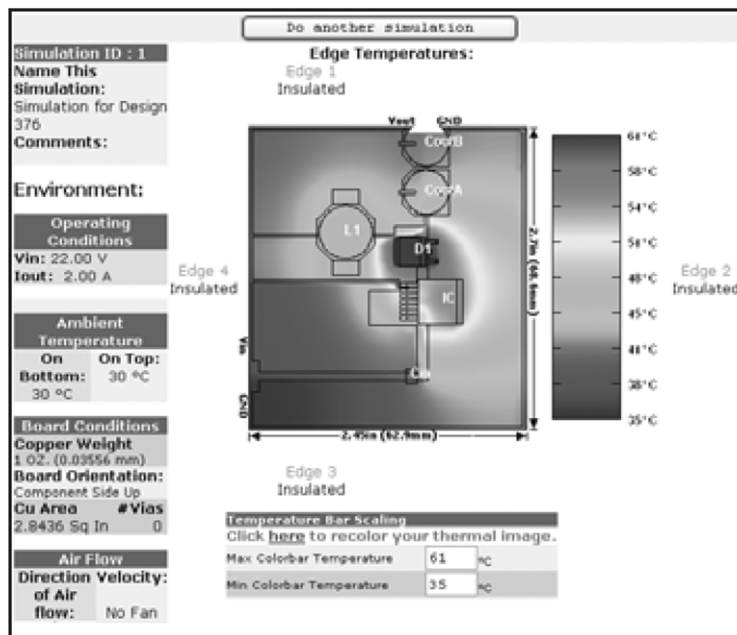


Figure 2. Thermal Simulation with WebTHERM

4 The Hands-On Approach

The most accurate approach in finding the true IC temperature in a design is to build the design with all the final components which will be on the board, but physically set up on a board with enough distance from component to component so that the heat dissipations of individual components do not influence the temperature of other components on the board. A clever way of achieving the same result without changing the layout is to mount components in the air on short wires. The board can then be set to run steady state and the temperature of the external components can be measured with an infrared thermometer.

In the next step, we try to heat up the external components to the exact same temperature by driving them individually. For example, we would drive the inductor with a DC current so that in steady state we would get the same infrared temperature measurement. The dissipated power needed to warm the device up to the same level as with the complete power design running can easily be calculated by multiplying the DC current by the DC voltage drop across the inductor.

Once this exercise is done for the external components, but mostly the external diode and the inductor, we can correctly measure the efficiency of the complete power design, subtract the losses of the individual external components from our measurements, and get to the power losses of the switching regulator IC.

This power loss can again be translated into die temperature using the θ_{JC} thermal resistances as given in the data sheet.

5 The Choice is Yours

There are many different methods for performing thermal analysis. Depending on the precision needed as well as the time and effort one is willing to put into it, there are different options as described above. If your design requires the switching regulator to work with a junction temperature up to 150°C rather than the typical 125°C maximum junction temperature, there are SIMPLE SWITCHER regulators that can help, such as TI's LM2590HV-AQ.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com