


ART01 = LAYER 1 (COMPONENT SIDE)
 ART02 = LAYER 2 (INNER 2)
 ART03 = LAYER 3 (INNER 3)
 ART04 = LAYER 4 (SOLDER SIDE)

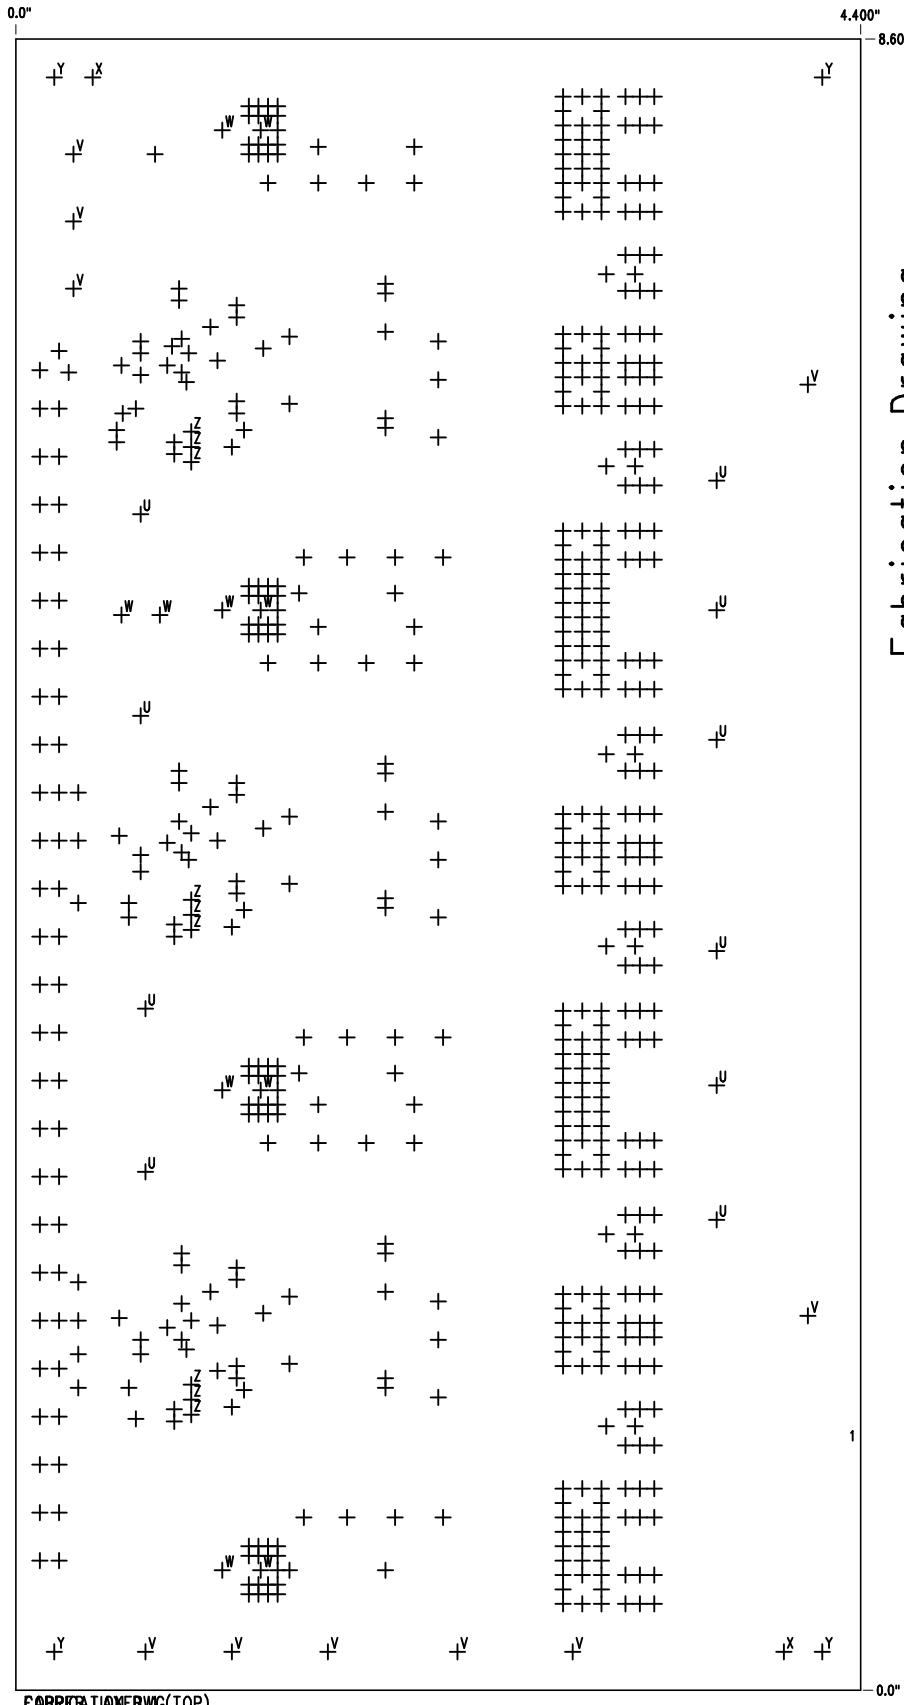

CORROSION RESISTANT (TOP)

Fabrication Drawing

NOTES : Unless Otherwise Specified

1. MATERIAL : FR4 OR EQUIVALENT EPOXY, 4 OZ. COPPER CLAD
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS
2. FINISH : ALL PLATED HOLES .001 MIN. / .0015 MAX. COPPER PLATE
ELECTRODEPOSITED TIN-LEAD COMPOSITION
BEFORE REFLUX, SOLDER MASK OVER BARE COPPER (SMOBC)
3. SOLDER MASK : BOTH SIDES USING SR1020 OR EQUIVALENT
4. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK
5. ALL DIMENSIONS ARE IN INCHES

SIZE	QTY	SYM	PLTD
20	567	+	PLTD
189	10	U	PLTD
95	10	V	PLTD
31	10	W	PLTD
72	2	X	NPLTD
125	4	Y	PLTD
35	9	Z	PLTD