



REVISIONS			
REV	DESCRIPTION	APPR	DATE

- ART01 = LAYER 1 (COMPONENT SIDE)
- ART02 = LAYER 2 (GND)
- ART03 = LAYER 3 (GND)
- ART04 = LAYER 4 (SOLDER SIDE)

NOTES: Unless Otherwise Specified:

- PCBS Are To Be RoHS Compliant
- Fab Per IPC-A-600
- Material: Epoxy Fiberglass, NEMA Grade FR-4, 4 Layers
.062 +/- .005 Inch Thickness With
2 OZ. Copper Finished On All Outer Layers,
1 OZ. Copper On All Internal Layers.
Flammability Rating: 94 V-2 Minimum.
- Size: Cut To Dimensions And Tolerances Shown.
0.00 Are Primary Datums.
- Finish: SMOBC Using Wet Mask, Or LPI Both Sides, Color Green.
Silkscreen Both Sides With White Non-conductive Ink.
- Gold Immersion Both Sides (Not Required For Prototype Boards)
- Drilling: Drill Holes Per Schedule. Plate Through
Holes With Copper, .001 Inch Thick Min. All
Hole Sizes Are Specified After Plating.
Hole Location Tolerances Are +/- .003" In Relation To Center.
- Do Not Alter Artwork To Add Logo Or Date Code.
May Modify Pad Size To Meet End Finish.
- Scoring: (Not Required For Prototype Boards)

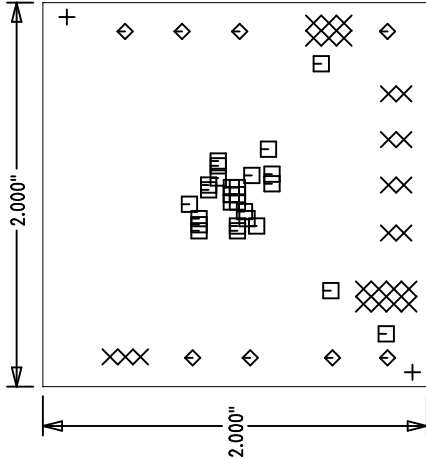

Fabrication Drawing

SIZE	QTY	SYM	PLATED	TOL
70	2	+	NO	+/-0.0
35	25	X	YES	+/-0.0
10	27	□	YES	+/-0.0
95	8	◇	YES	+/-0.0

APPROVALS		INIT		DATE	
DRAWN		KL			
CHECK					
DESIGN					
ENGR					
SCALE = NONE					

LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
LTC3603EMSE, High Input Voltage 2.5A Monolithic Synchronous Buck Regulator		REV. A	
SIZE	A	DC1445A	REV. A
SHT 1 of 1			