


# Keysight 86120B, 86120C, 86122C Multi-Wavelength Meters

Data Sheet



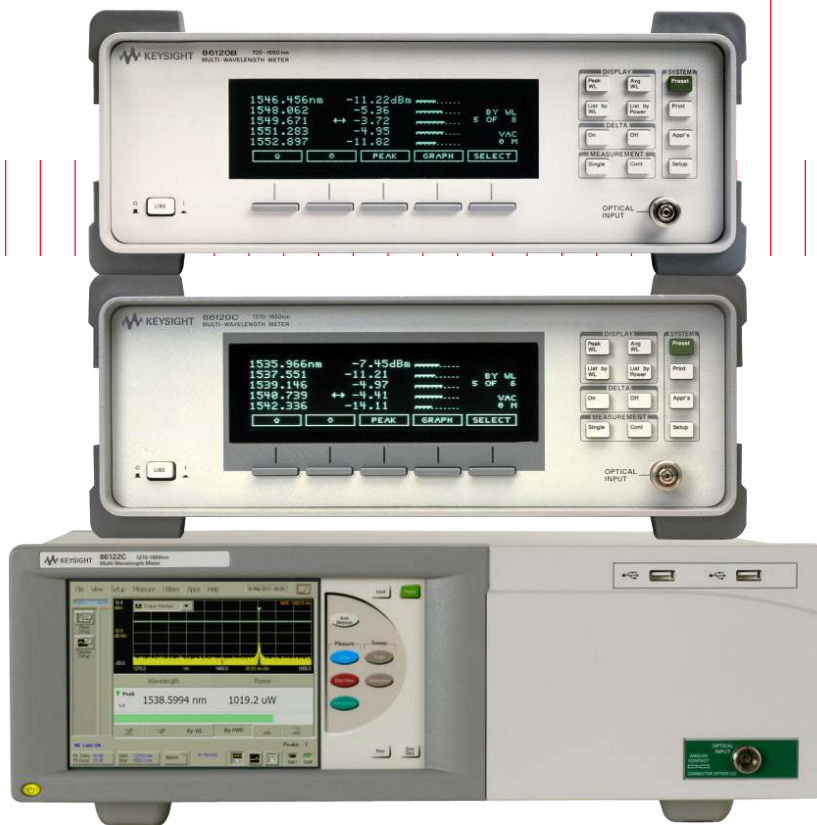

## Introduction

The 8612xx family of multi-wavelength meters is known for reliability and durability on the manufacturing floor, on engineer's benches, and it is robust enough to be installed on ships. Statistical data from a large share of the industry's installed wavelength meters enables Keysight Technologies, Inc. to continuously fine-tune its instruments for lower cost of ownership and longer usage. Current updates include an extended recommended re-calibration period of two years and a doubled lifetime of the built-in reference laser. The new 86122C multi-wavelength meter includes five years, the 86120B and 86120C three years of warranty without additional cost. The warranty covers not only the reference laser, but all opto-mechanical and electronic parts.

Keysight multi-wavelength meters are Michelson interferometer-based instruments that measure wavelength and optical power of laser light over a specified wavelength range. Simultaneous measurements of multiple laser lines are performed allowing measurements of DWDM signals and multiple lines of Fabry-Perot lasers. Each laser line is assumed to have a linewidth (including modulation sidebands) of less than:

- 10 GHz for the 86120B,
- 5 GHz for the 86120C and
- 2.5 GHz for the 86122C

This technical specifications sheet describes the measurement accuracy and operating conditions of the Keysight 86120B, 86120C and 86122C Multi-Wavelength Meters. The specifications apply to all functions within the specified environmental conditions. All specifications apply after the instrument's temperature has been stabilized after 15 minutes continuous operation, and when the instrument is in NORMAL UPDATE mode (86120B and 86120C).

## Definitions of Terms

### Characteristics and Specifications

The distinction between specifications and characteristics is described as follows:

- *Specifications* describe warranted performance.
- *Characteristics* provide useful, but non-warranted information about the functions and performance of the instrument.
- *General Characteristics* give additional information for using the instrument. These are general descriptive terms that do not imply a level of performance.

### Wavelength

- *Range* refers to the allowable wavelength range of the optical input signal.
- *Absolute accuracy* indicates the maximum wavelength error over the allowed environmental conditions.
- *Differential accuracy* indicates the maximum wavelength error in measuring the wavelength difference between two signals that are simultaneously present.
- *Minimum resolvable separation* indicates the minimum wavelength separation of two laser lines input required to measure each wavelength simultaneously. Two laser lines closer in wavelength than the minimum resolvable separation are not resolved and one average wavelength is displayed.
- *Display resolution* indicates the minimum incremental change in displayed wavelength.

### Power

- *Calibration accuracy* indicates the maximum power calibration error at the specified wavelengths over the allowed environmental conditions.
- *Flatness* refers to the maximum amplitude error in a measurement between two lines that are separated in wavelength by no more than the specified amount.
- *Linearity* indicates the maximum power error in measuring the change in power of one laser line.
- *Polarization dependence* indicates the maximum displayed power variation as the polarization of the input signal is varied.
- *Display resolution* indicates the minimum incremental change in displayed power.

### Sensitivity

- *Sensitivity* is defined as the minimum power level of a single laser line input to measure wavelength and power accurately. A laser line with less than the minimum power may be measured but with reduced wavelength and power accuracy. For multiple laser lines input, sensitivity may be limited by total input power.

### Selectivity

- *Selectivity* indicates the ability to measure the wavelength and power of a weak laser line in the proximity of a specified stronger laser line and separated by the specified amount.

### Input power

- *Maximum displayed level* indicates the maximum total input power (total of all laser lines present) to accurately measure wavelength and power.
- *Maximum safe input power* indicates the maximum total input power (total of all laser lines present) to avoid permanent optical damage to the instrument.

### Maximum number of lines input

*Maximum number of lines input* is the maximum number of displayed lines. If more than the specified number of lines is input, only the longest wavelength lines are displayed.

### Input return loss

*Input return loss* indicates the optical power reflected back to the user's fiber cable relative to the input power. It is limited by the return loss of the front panel connector, and assumes the user's connector is good.

### Measurement cycle time

*Measurement cycle time* refers to the cycle time when measuring wavelength and power of laser lines. Specific advanced applications may require longer cycle times.

## Specifications

	86120B	86120C	86122C	Notes
<b>Wavelength</b>				
Range	700 to 1650 nm (182 to 428 THz)	1270 to 1650 nm (182 to 236 THz)	1270 to 1650 nm (182 to 236 THz)	For lines separated by less than the specified amount, wavelength accuracy is reduced.
<b>Absolute accuracy</b>				
	± 3 ppm	± 2 ppm	± 0.2 ppm	
– At 1550 nm	± 0.005 nm	± 0.003 nm	± 0.3 pm	
– At 1310 nm	± 0.004 nm	± 0.003 nm	± 0.3 pm	
– For laser lines separated by	≥ 30 GHz	≥ 15 GHz	≥ 10 GHz	
Differential accuracy <sup>1</sup>	± 2 ppm	± 1 ppm	± 0.15 ppm	
<b>Minimum resolvable separation 1 (equal power lines input)</b>				
	20 GHz	10 GHz	5 GHz	
– At 1550 nm	0.16 nm	0.08 nm	0.04 nm	
– At 1310 nm	0.11 nm	0.06 nm	0.03 nm	
– For laser lines separated by	≥ 30 GHz	≥ 15 GHz	≥ 10 GHz	
<b>Display resolution</b>				
		0.001 nm	0.0001 nm	
Fast update mode		0.01 nm	N/A	
Units	nm (vacuum or standard air), cm <sup>-1</sup> , THz			
<b>Power</b>				
Calibration accuracy <sup>5</sup>	± 0.5 dB (at ± 30 nm from 780 nm <sup>1</sup> , 1310 nm, and 1550 nm)		± 0.5 dB (at ± 30 nm from 1310 nm and 1550 nm)	
Flatness <sup>1</sup>	± 0.2 dB (1200 to 1600 nm)		± 0.2 dB (1270 to 1600 nm)	30 nm from any wavelength
	± 0.5 dB (700 to 1650 nm)		± 0.5 dB (1270 to 1650 nm)	
Linearity	± 0.3 dB (1200 to 1600 nm)		± 0.3 dB (1270 to 1600 nm)	Lines above -30 dBm
Polarization dependence	± 0.5 dB (1200 to 1600 nm)		± 0.5 dB (1270 to 1600 nm)	
	± 1.5 dB <sup>1</sup> (700 to 1650 nm)		± 1.0 dB <sup>1</sup> (1600 to 1650 nm)	
Display resolution		0.01 dB		
Units	dBm, mW, μW			
<b>Sensitivity</b>				
Single line input	-20 dBm (700 to 900 nm)	-40 dBm (1270 to 1600 nm)	-32 dBm (1270 to 1600 nm)	
	-25 dBm (800 to 1200 nm)	-30 dBm (1600 to 1650 nm)	-22 dBm (1600 to 1650 nm)	
	-40 dBm <sup>6</sup> (1200 to 1600 nm)			
	-30 dBm <sup>6</sup> (1600 to 1650 nm)			
Multiple lines input <sup>1</sup>	30 dB below total input power, but not less than single line input sensitivity			
Selectivity <sup>1</sup>	25 dB spacing ≥ 100 GHz	25 dB spacing ≥ 50 GHz	25 dB spacing ≥ 90 GHz	
	10 dB spacing ≥ 30 GHz	10 dB spacing ≥ 15 GHz	10 dB spacing ≥ 10 GHz	

1. Characteristic.

2. For 86122C number of laser lines may be limited by signal power requirements for accurate wavelength measurements.

3. Type tested means tested, but not warranted, for continuous operation.

4. At 1550 nm.

5. Excluding polarization effects.

6. Spurious free under Preset conditions.

## Specifications (continued)

	86120B	86120C	86122C	Notes
<b>Input power</b>				
Maximum displayed level		+10 dBm		Sum of all lines input
Maximum safe input level		+18 dBm		
<b>Return loss</b>				
– With non-angled (PC) connectors (Option 021)		35 dB		
– With angled (APC) connectors (Option 022)		50 dB		
– Measurement cycle time		1.0 s	0.5 s	
– Maximum number of lines	100	200	1000 <sup>2</sup>	
Measurement modes	List by wavelength table, list by power table, signal wavelength and power, average wavelength and total power			Data logging and sorting by any parameter are included in the 86122C
Delta modes	Delta wavelength, delta power, delta wavelength and power			
<b>Built in automatic measurement applications</b>				
<b>Signal to noise ratio</b> <sup>1,4</sup>				
Channel spacing				
– ≥ 200 GHz	> 35 dB with 100 averages			0.1 nm noise bandwidth, lines above –25 dBm
– ≥ 100 GHz		> 35 dB with 100 averages	> 35 dB with 100 averages	
– ≥ 50 GHz		> 27 dB with 100 averages	> 27 dB with 100 averages	
<b>Drift</b>				
	Maximum, minimum, total drift (max-min) of wavelengths and powers over time			
<b>Fabry-Perot characterization</b>				
	Mean wavelength, peak wavelength, mode spacing, full-width half maximum, peak amplitude, total power, sigma			
<b>Coherence length</b> <sup>1</sup>				
	<ul style="list-style-type: none"> <li>– Fabry-Perot lasers <ul style="list-style-type: none"> <li>– 1 to 200 mm coherence length</li> </ul> </li> <li>– Accuracy to within ± 5%, 0.75 cycle time</li> </ul>			
<b>Additional features</b>				
	Power offset, power bars (on or off), user adjustable peak excursion and peak threshold, user adjustable start and stop wavelength limits, graphical display, save and recall instrument states.			
<b>Inputs/outputs</b>				
Optical input	9 μm/125 μm single-mode fiber			
Rear panel connectors	GPIB, parallel printer port, AC line		LAN, PS/2 for keyboard and mouse, SVGA and DVI for external monitor, GPIB, USB, AC Line	

1. Characteristic.

2. For 86122C number of laser lines may be limited by signal power requirements for accurate wavelength measurements.

3. Type tested means tested, but not warranted, for continuous operation.

4. At 1550 nm.

5. Excluding polarization effects.

6. Spurious free under Preset conditions.

## Specifications (continued)

	86120B	86120C	86122C	Notes
<b>Reliability</b>				
Warranty	3 years	3 years	5 years	
Recommended re-calibration	2 years	2 years	2 years	
<b>Dimensions and weight</b>				
Dimensions (H x W x D)	140 mm x 340 mm x 465 mm (5.5 in x 13.4 in x 18.3 in)		138 mm x 425 mm x 520 mm (5.2 in x 16.7 in x 20.5 in)	
	9 kg (19 lb)		14.5 kg (32 lb)	
<b>Environmental</b>				
<b>Operational</b>				
Temperature	0 to +55 °C		15 to 35 °C	
Humidity <sup>3</sup>	< 95% R.H. at +40 °C, 5 day soak		< 75% R.H. at 35 °C Indoor use only	
Shock <sup>3</sup>	300 g		120 g	Half sine, 2 msec pulse
Vibration <sup>3</sup>	5 g rms		2 g rms	Random, 5 Hz to 500 Hz, 10 min./axis Sine, 5 Hz to 500 Hz, 1 octave/min.
	0.75 g (0 to peak)		0.5 g (0 to peak)	
<b>Storage</b>				
Temperature	-40 °C to +70 °C			
Humidity <sup>3</sup>	90% R.H. at +65 °C for 24 hrs.		95% R.H. at +40 °C 5 day cycle	Non-condensing
<b>Power requirements</b>				
Voltage and frequency	100 V / 115 V / 230 V / 240 V~, 50 Hz / 60 Hz		100 V / 115 V / 230 V / 240 V~, 50 Hz / 60 Hz	
Maximum power	70 W max (125 VA max)		310 VA max	

1. Characteristic.
2. For 86122C number of laser lines may be limited by signal power requirements for accurate wavelength measurements.
3. Type tested means tested, but not warranted, for continuous operation.
4. At 1550 nm.
5. Excluding polarization effects.
6. Spurious free under Preset conditions.

## General Characteristics

The 8612x wavelength meters contain HeNe reference lasers, which have limited operating lifetimes, like all gas-discharge lasers. With the latest enhancement of the reference lasers used in the new 86122C, the average laser lifetime has doubled. Together with the 2-year recommended re-calibration period and the included 5-year warranty (3 years for 86120B, 86120C), this helps minimizing planned and unplanned downtimes and cost of ownership.

## Ordering Information

For the most up-to-date ordering information, please contact your Keysight sales representative.

<b>Connector interfaces (order separately)</b>	
81000FI	FC connector interface (FC/PC)
81000HI	E-2000 connector interface
81000KI	SC connector interface
81000LI	LC connector interface
81000MI	MU connector interface
81000NI	FC connector interface (FC/APC with narrow key)
81000SI	DIN connector interface
81000VI	ST connector interface
<b>86120B/C Multi-wavelength meter</b>	
<b>Optical connectors</b>	
86120x-021	Straight (non-angled) connector interface-PC
86120x-022	Angled contact interface-APC
<b>Accessories</b>	
86120x-AXE	Rack flange kit with handles
86120x-IA4	Rack flange kit without handles
86120x-UK6	Commercial calibration certificate with test data
<b>Warranty and calibration</b>	
R-51B-001-5C	Warranty Assurance Plan – Return to Keysight – 5 years
R-50C-011-3	Calibration Assurance Plan – Return to Keysight – 3 years
R-50C-011-5	Calibration Assurance Plan – Return to Keysight – 5 years
R-50C-021-3	ANSI Z540-1-1994 Calibration – 3 years
R-50C-021-5	ANSI Z540-1-1994 Calibration – 5 years

<b>86122C Multi-wavelength meter</b>	
<b>Optical connectors</b>	
86122C-021	Straight (non-angled) connector interface-PC
86122C-022	Angled contact interface-APC
<b>Accessories</b>	
86122A-1CM	Rack mount kit without handles
86122A-1CN	Handle kit
86122A-1CP	Rack mount kit plus handles
86122C-UK6	Commercial calibration certificate with test data
<b>Calibration</b>	
R-50C-011-3	Calibration Assurance Plan – Return to Keysight – 3 years
R-50C-011-5	Calibration Assurance Plan – Return to Keysight – 5 years
R-50C-021-3	ANSI Z540-1-1994 Calibration – 3 years
R-50C-021-5	ANSI Z540-1-1994 Calibration – 5 years

**CLASS 1 LASER PRODUCT  
(IEC 60825-1 / 2007)**

## Optical Instruments Online Information

Optical test instruments	<a href="http://www.keysight.com/find/oct">www.keysight.com/find/oct</a>
Lightwave component analyzers	<a href="http://www.keysight.com/find/lca">www.keysight.com/find/lca</a>
Polarization solutions	<a href="http://www.keysight.com/find/pol">www.keysight.com/find/pol</a>
Spectral analysis products	<a href="http://www.keysight.com/find/mwm">www.keysight.com/find/mwm</a>
Electro-optical converters	<a href="http://www.keysight.com/find/ref">www.keysight.com/find/ref</a>
Optical test instruments accessories	<a href="http://www.keysight.com/find/octaccessories">www.keysight.com/find/octaccessories</a>
Firmware and driver download	<a href="http://www.keysight.com/find/octfirmware">www.keysight.com/find/octfirmware</a>
Keysight photonic discussion forum	<a href="http://www.keysight.com/find/photonic_forum">www.keysight.com/find/photonic_forum</a>

**myKeysight**

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System



**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/mwm](http://www.keysight.com/find/mwm)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-09-23-14)