

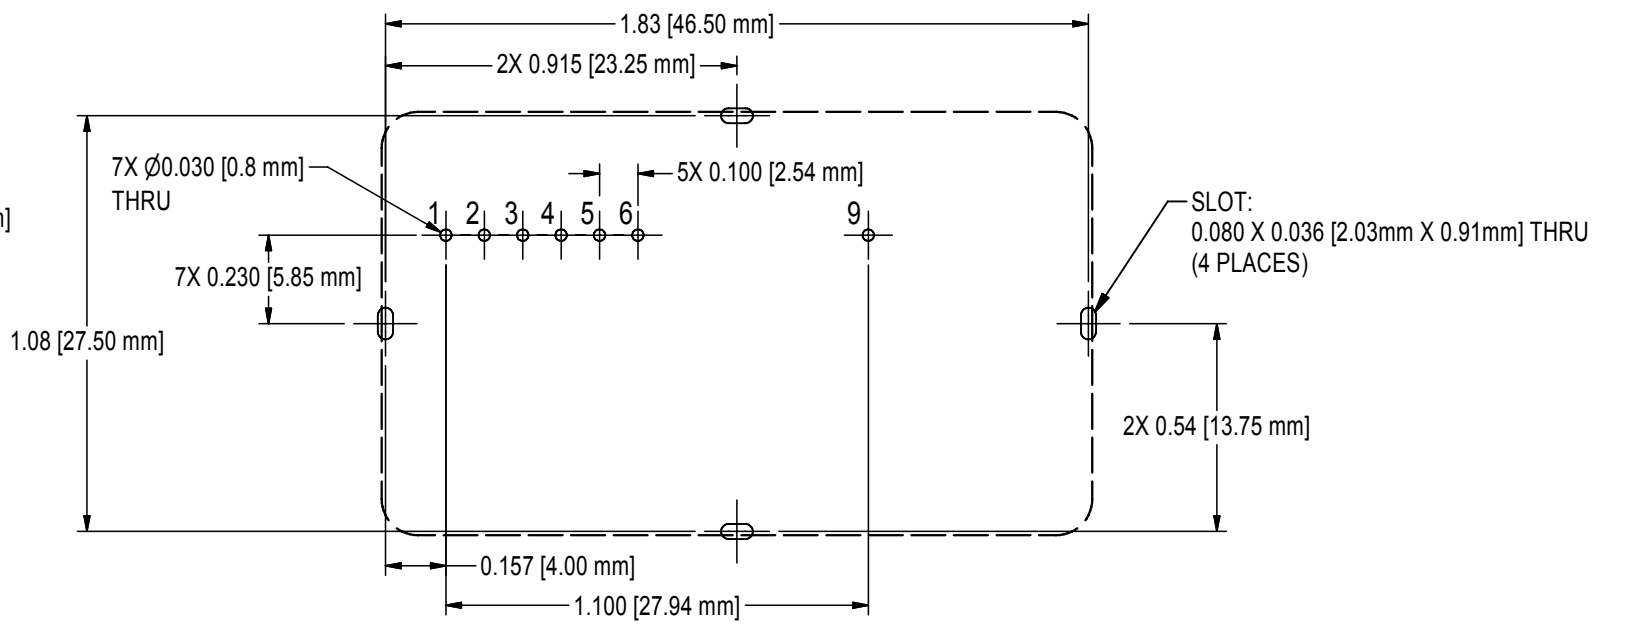
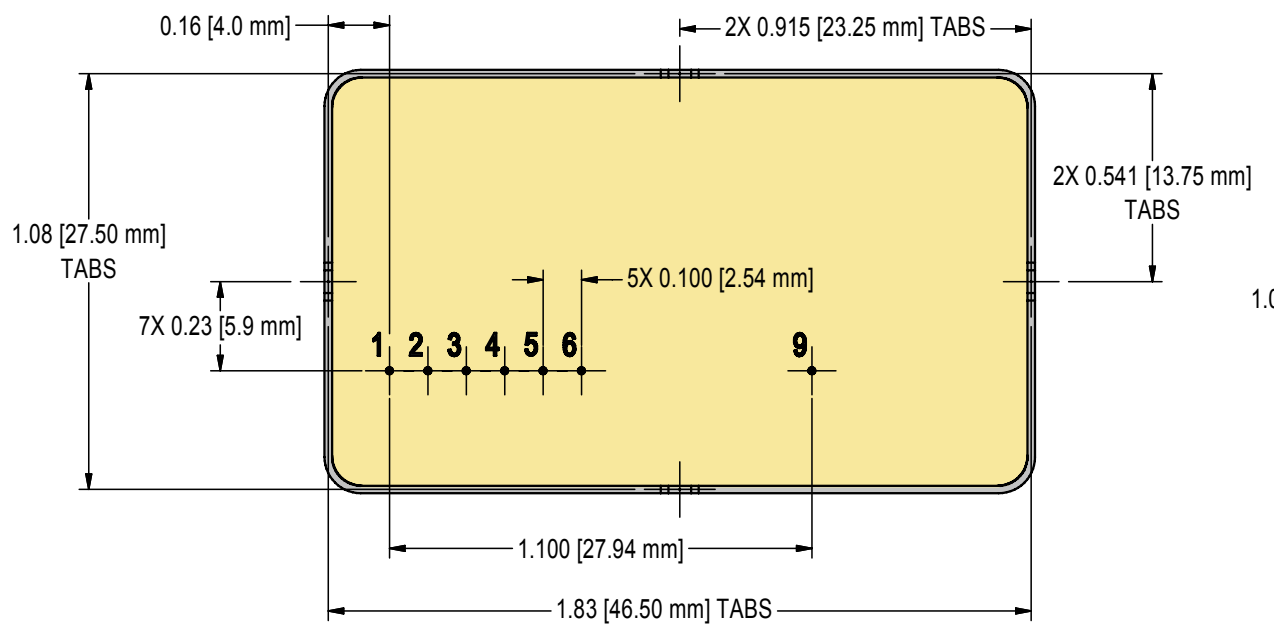
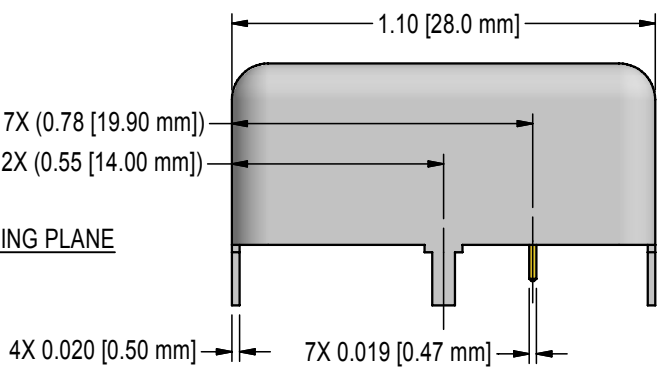


PROPRIETARY STATEMENT: ULTRAVOLT INC.  
CONFIDENTIAL DRAWING

| REVISIONS |                      |      |            |      |
|-----------|----------------------|------|------------|------|
| REV       | DESCRIPTION          | BY   | DATE       | APPD |
| A         | RELEASED TO DOC-CTRL | A.S. | 05/10/2012 |      |

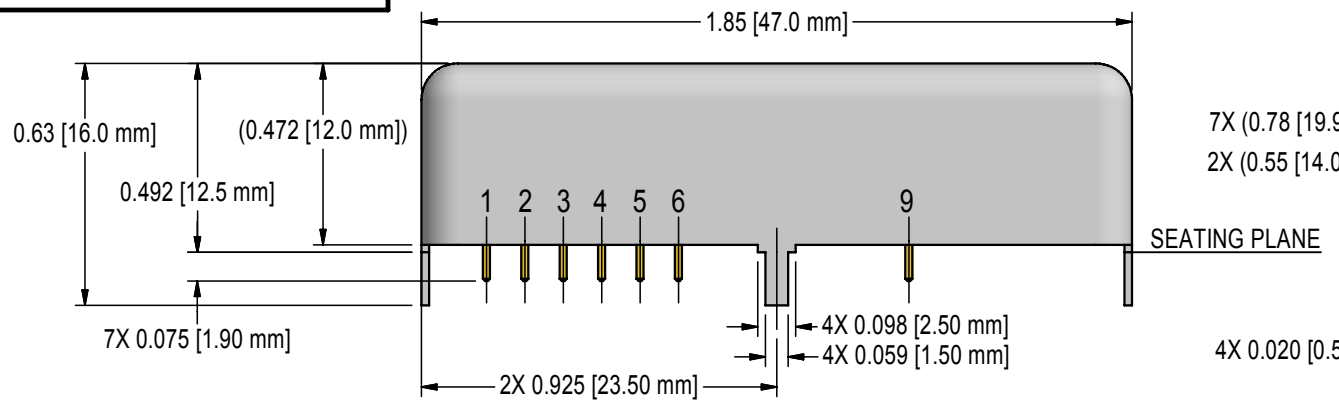

PCB MOUNTING (TOP VIEW)

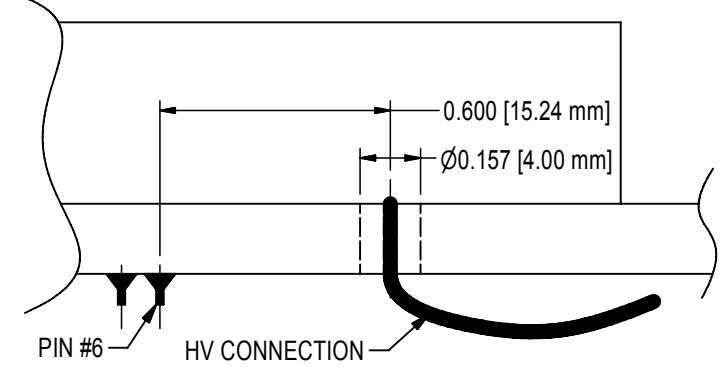

FLYING LEAD OPTION

- NOTES:  
1- PINS:  
1.1- MATERIAL: GOLD PLATED 0.019 [0.47mm] ROUND.  
1.2- THE CENTER OF THE PINS TABS ARE LOCATED FROM CENTER OF PIN 1.  
1.3- PINS 1 THRU 6 SPACING 0.100 [2.54mm] ON CENTER, HEIGHT FROM SEATING PLANE 0.075 [1.90mm].  
2- OPTIONAL FLYING LEAD:  
COAXIAL CABLE (RG178), 0.079 [2.0mm] DIA., 19.685 [500mm] LONG. WIRE LENGTH TOLERANCE IS ±0.500 [12.7mm].  
3- CONSTRUCTION:  
TIN STEEL PLATE, 0.020 [0.50mm].  
INSULATION: FULLY POTTED IN AN EPOXY RESIN.  
4- TOLERANCES:  
4.1- OVERALL ±0.040 [1.01mm]  
4.2- PIN TO PIN ±0.015 [0.38mm]  
4.3- PIN TO TABS ±0.020 [0.50mm]  
5- RoHS:  
UNITS ARE RoHS COMPLIANT.

| UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES [mm] TOLERANCES ARE: |              |  | CUSTOMER               |            |
|---|--------------|--|------------------------|------------|
| 2 PL DEC ± .02  | FRACT ± 1/64 |  | DRAWN                  | Adrian Siu |
| 3 PL DEC ± .010   | ANGLES ± 2'  |  | CHECKED                |            |
|   |              |  | CSD                    |            |
|   |              |  | MFG ENGR               |            |
|   |              |  | MARKETING              |            |
|   |              |  | QA                     |            |
|   |              |  | ENG                    |            |
|   |              |  | CFN: OL-078_revA_M.idw |            |

**ULTRAVOLT, INC.**  
1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779  
1-631-471-4444

OUTLINE, M SERIES

PART NUMBER: **OL-078** REV **A**

SCALE NONE DO NOT SCALE THIS DRAWING SHEET 1 OF 1

| DASH NUMBER | NEXT ASSY | USED ON |
|-------------|-----------|---------|
| APPLICATION |           |         |

